A

Case Docket No. FUJI 16.366
Filed by Express Mail
(Receipt No. EM366876604US
on 8/6/99
pursuant to 37 CFR 1.10
by Angela Haussermann

THE COMMISSIONER OF PATENTS AND TRADEMARKS
Washington D.C. 20231
Box Patent Applications

SIR:
Transmitted herewith for filing is: [X] a new application
[ ] a c-i-p application of S.N. ____________ filed ____________

Inventor(s): Yoshiko DOI, Miyuki SATO, Yujo KAKUMI, Atsushi HATTORI, Masaki MISHIMA

For: METHOD AND SYSTEM FOR NETWORK MANAGEMENT

Enclosed are:
[X] 27 sheets of drawings. (Figures 1-9,10A&10B,11A-11C, 12A-12D,13,14, 15A&15B,16-27)
[X] Specification, including claims and abstract (38 pages)
[X] Declaration
[X] An assignment of the Invention to FUJITSU LIMITED
[ ] A certified copy of ____________ Application No. ____________
[X] An associate power of attorney
[ ] A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27
[X] Post card
[X] Recording fee (as indicated below)
[X] Information Disclosure Statement, PTO-1449, copies of 2 references
[X] Other Sub-Power of Attorney
[ ] Other ____________

FOR:	Col. 1 NO. FILED	Col. 2 NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	13 - 20 =	0
INDEP CLAIMS	2 - 3 =	0
[ ] MULTIPLE DEPENDENT CLAIMS PRESENTED		

*If the difference in Col. 1 is less than zero, enter "0" in Col. 2

SMALL ENTITY RATE	SMALL ENTITY FEE	OTHER THAN A SMALL ENTITY RATE	OTHER THAN A SMALL ENTITY FEE
	$380		$760
x 9 =	$	x 18 =	$ 0
x 39 =	$	x 78 =	$ 0
x 130 =	$	x 260 =	$
TOTAL	$	TOTAL	$ 760

[ ] Please charge our Deposit Account No. 08-1634 the amount of ____________ to cover the filing fee and recording fee (if any)

[X] A check in the amount of $800.00 to cover the filing fee and the recording fee (if any) is enclosed.

[X] The Commissioner is hereby authorized to charge payment of any fee associated with this communication or credit overpayment to Deposit Account No. 08-1634. A duplicate coy of this sheet is enclosed.

Respectfully Submitted,

Helfgott & Karas, P.C.
60th Floor
Empire State Building
New York, New York 10118-6098
(212)643-5000

[ ] Aaron B. Karas, Reg. No. 18,923
[X] Samson Helfgott, Reg. No. 23,072
[ ] Leonard Cooper, Reg. No. 27, 625
[ ] Linda S. Chan, Reg. No. 42,400
[ ] Jacqueline Steady, Reg. No. 44,354

Date: August 6, 1999

Any fee due with this paper, not fully covered by an enclosed check, may be charged on Deposit Acct No. 08-1634

Filed by Express Mail
(Receipt No. EM368876604US)
on 8/6/99
pursuant to 37 C.F.R.1.10.
by Angela Haussermann

TITLE OF THE INVENTION

METHOD AND SYSTEM FOR NETWORK MANAGEMENT

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a network-management method and a network-management system for controlling a network that provides various services.

In a certain network configuration, a plurality of nodes (e.g., switches and ATM switches) and cross-connection devices are connected via physical communication lines, and logical paths are established with respect to various services for providing audio, image, and data. In a large-scale network, a plurality of communication-service providers may offer services. In such a case, it is expected to be able to control network with respect to each service or with respect to each communication-service provider.

2. Description of the Related Art

There are various proposed schemes for connecting LANs (local area networks) and WANs (wide area networks) together to create a large-scale network and for controlling the created large-scale network. In general, a large-scale network is implemented by employing multi-vendor network elements. Further, the large-scale network may be managed by a single communication-service provider, or may be created and managed by a plurality of communication-service providers. Against this background, there is a scheme for dividing a large-scale network into segments and giving a hierarchical structure to these segments, allowing each network segment to be displayed separately for management purposes and allowing connections inside each segment to be controlled. An example of such a scheme is disclosed in Japanese Patent Laid-open Application No. 6-326706, for example.

Another scheme allows only an administrator

of a network of a given communication-service provider to store virtual view information in a table form for the purpose of controlling the network. This scheme allows the administrator to attend to network management while insuring overall security between different communication-service providers. An example of such a scheme is disclosed in Japanese Patent Laid-open Application No. 4-230139.

Further, there is a scheme for controlling network by displaying network nodes on a screen by use of colors for indication of network conditions, interface-connection conditions, and so on, and by providing a beeping function using different beep sounds. When the network fails, a location of the failure is reported to a network administrator by displaying the location in a different color and producing an alarming sound. Also, there is a scheme for controlling network by utilizing GUI (graphical user interface). Icons and pull-down selections are used for obtaining MIB (management information base) information, for example, thereby allowing visual evaluation of current network conditions.

A network uses physical communication lines, switches, ATM switches, etc., to connect between terminals and also between terminals and information providers, and renders various services for transmission of audio data and/or image data, the Internet, CBR (constant bit rate) transmission, VBR (variable bit rate) transmission, etc. In a related-art network, conditions of physical communication lines and nodes such as switches and ATM switches are displayed on a management screen, thereby allowing a network administrators to spot a network failure. In this configuration, however, network conditions cannot be controlled on a service-wise basis. Further, it is not easy to evaluate whether a spotted network failure severely affects the services.

Settings of connections for providing services are usually made by entering commands. When a network includes multi-vendor network elements, various commands need to be provided so as to cope with each of different network elements. Because of this, it is undesirably difficult to set connections in a service-wise manner.

Accordingly, there is a need for a network-management method and a network-management system which allow control and settings to be easily made with respect to each of different services by providing a physical network structure and a logical network structure on a service-wise basis.

SUMMARY OF THE INVENTION

Accordingly, it is a general object of the present invention to provide a network-management method and a network-management device which can satisfy the need described above.

It is another and more specific object of the present invention to provide a network-management method and a network-management system which allow control and settings to be easily made with respect to each of different services by providing a physical network structure and a logical network structure on a service-wise basis.

In order to achieve the above objects according to the present invention, a method of controlling a network, which includes network elements connected via links and provides services, includes the steps of creating view-configuration information based on network-configuration information with respect to each of the services such that the view-configuration information is related to the network-configuration information, and displaying a view based on the view-configuration information with respect to each of the services, the view including both or either one of a

physical network configuration of the network and a logical network configuration of the network.

In the method as described above, views including physical network configurations and/or logical network configurations are presented to a user (i.e., a network administrator or a service administrator) to allow the network to be controlled on a service-wise basis. This is made possible by creating view-configuration information based on network-configuration information with respect to each of the services such that the view-configuration information is related to the network-configuration information. Because of such a configuration, it is possible to detect condition changes simultaneously in a plurality of views when the network-configuration-information has changes in the conditions thereof. This configuration eliminates inconsistency between different views.

The same objects can be achieved by the following system according to the present invention. Namely, a system for controlling a network including network elements and links includes a database which stores network-configuration information and view-configuration information such that the view-configuration information is related to the network-configuration information, a service-management server which attends to registering and updating of the information stored in the database, and defines views of a physical network configuration and a logical network configuration with respect to each of the services based on the view-configuration information stored in the database, a network-management server which collects information on configurations of the network elements and the links as well as information on failures, and informs the service-management server of a change in at least one of the configurations and the failures for a purpose of the updating, and a

client which displays both or either one of the physical network configuration and the logical network configuration with respect to the client's own service based on the views defined by the service-management server.

Other objects and further features of the present invention will be apparent from the following detailed description when read in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig.1 is an illustrative drawing showing a schematic configuration of a network-management system according to the present invention;

Fig.2 is an illustrative drawing for explaining multiple views of the present invention with reference to a physical network configuration;

Fig.3 is an illustrative drawing for explaining updating of a database according to the present invention;

Fig.4 is an illustrative drawing showing a component configuration corresponding to the system of Fig.1;

Fig.5 is an illustrative drawing showing a system configuration based on components;

Fig.6 is a table showing database items;

Fig.7 is a table showing database items relating to reconstruction;

Figs.8 and 9 are illustrative drawings showing a configuration of the database;

Figs.10A and 10B are tables showing contents and descriptions of the contents with respect to database items shown in Figs.8 and 9;

Figs.11A through 11C are illustrative drawings for explaining logical network configurations;

Figs.12A through 12D are illustrative drawings for explaining a trace display;

Fig.13 is an illustrative drawing showing multiple views;

Fig.14 is an illustrative drawing for explaining failure labels and failure levels;

Figs.15A and 15B are illustrative drawings for explaining failure-level information;

Fig.16 is an illustrative drawing for explaining failure labels, physical-failure levels, and service-failure levels;

Fig.17 is an illustrative drawing showing definitions of failure levels;

Fig.18 is an illustrative drawing for explaining a spill-over effect of a port failure;

Fig.19 is a flowchart of a process performed at the time of a failure-level change;

Fig.20 is a flowchart of a process of creating multiple views;

Fig.21 is an illustrative drawing showing an example of definition files used in a multi-vendor environment;

Fig.22 is an illustrative drawing for explaining making of cross-connect settings;

Fig.23 is an illustrative drawing for explaining registration of device-specific parameters;

Fig.24 is an illustrative drawing showing a procedure of cross-connect setting;

Fig.25 is an illustrative drawing for explaining setting of a route;

Fig.26 is an illustrative drawing for explaining setting of a route that includes virtual links; and

Fig.27 is an illustrative drawing for explaining setting of a route which includes a node that can divide a route.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

In the following, embodiments of the present

invention will be described with reference to the accompanying drawings.

Fig.1 is an illustrative drawing showing a schematic configuration of a network-management system according to the present invention.

The network-management system of Fig.1 includes a service-management server 1, a database 2, NEM (network-management) servers 3-1 through 3-4, a VOD (video-on-demand)-service-management client 4-1, an audio-service-management client 4-2, an IP (information provider)-service-management client 4-3, a communication-line-rent-service-management client 4-4, and a network 5.

The service-management server 1 includes a view-definition unit 1-1, a logical-network-layout-generation unit 1-2, a connection-setting unit 1-3, a real-time-network-information-update unit 1-4, and a physical-failure-and-logical-failure relating unit 1-5.

The NEM servers 3-1 through 3-4 collect information about updates of configurations of network elements, links, and the like as well as information about failures by tracking or polling operations, and informs the service-management server 1 of events that affect network operations. In response, the service-management server 1 updates the database 2. Network configuration information about the network 5 regarding ATM switches, high-speed communication lines, and the like is collected and stored in the database 2 at the time of a system startup, and is updated as changes are made to the network configuration. Further, one or more views are stored with respect to different service types by a view-creation procedure.

The clients 4-1 through 4-4 provide a VOD service, an audio service, an IP service, and a communication-line-rent service, respectively. These clients for providing the specific types of services described above are only an example, and other clients

for other services can be added to the configuration of Fig.1.

A view in the present invention refers to a unit of control on a GUI (graphical user interface) of the network-management system. Multiple views refer to views that are presented as if they were provided on separate networks corresponding to different services despite the fact that these services are in reality provided via a single network. A view can be presented in such a fashion as to show both or either one of a logical network configuration and a physical network configuration by finding matches therebetween.

A network administrator or a service administrator selects one or more views from a presented list of views, so that both or either one of the logical network configuration and the physical network configuration are shown on a display screen (not shown) with respect to the one or more selected views. On the presented views, a location of failure and an area that is affected by the failure are shown, and, further, settings of connections can be made. Further, a view that shows all the elements of the network with reference to no hierarchical structure is referred to as a flat view. A view that groups elements according to a region and shows these elements in a framework of a hierarchical structure is referred to as a domain view.

Fig.2 is an illustrative drawing for explaining multiple views of the present invention with reference to a physical network configuration.

In Fig.2, a physical network 10 shows a physical configuration of a network. An audio-service view 11, an Internet-service view 12, and a VOD-service view 13 show a physical configuration of a network for providing a corresponding service.

An audio service is provided via a network which includes PBX switches connected via ATM switches,

for example. An Internet service is provided via a network in which routers are connected via ATM switches. Further, a VOD service is rendered by using a network in which a VOD server and VOD terminals are connected via ATM switches. A VOD-service administrator, for example, controls the network for providing the VOD service by using the physical network configuration of the VOD-service view 13 or a logical network configuration that can be presented as appropriate.

Fig.3 is an illustrative drawing for explaining updating of a database according to the present invention. Fig.3 shows the database 2, the service-management server 1, a NEM server 3 that is one of the NEM servers 3-1 through 3-4, and a network element 21 that may be a switch or an ATM switch provided in the network 5 of Fig.1. The NEM server 3 is generally located in a close proximity of the network. On the other hand, the service-management server 1 may be provided in a remote location and connected via another network (not shown) since the service-management server 1 is supposed to be connected to a plurality of NEM servers 3.

Information about all the network elements (21), which are subject to network management, is collected at the time of a system startup. When collecting update information about the network element 21 or information about a failure, the NEM server 3 uses an element-type-dependent-conversion function 22 to convert the collected information to database-registration information 23. Then, the NEM server 3 compares the database-registration information 23 with old database-registration information 24 by use of a comparison function 25, and replaces the old database-registration information 24 with the database-registration information 23 only if there is a change. Further, the NEM server 3 sends the database-

registration information 23 to the service-management server 1. In response, the service-management server 1 uses a database updating function 26 to update the database 2. The database-registration information 23 is transferred only when service related information collected from the network exhibits a change. This achieves updating of the database 2 with a small amount of data transfer.

Fig.4 is an illustrative drawing showing a component configuration corresponding to the system of Fig.1.

The service-management server 1 connected to the database 2 includes a client manager 31, a view controller 32, a user manager 33, a multi-domain manager 34, and local-domain managers 35 through 37. The local-domain managers 35 through 37 absorb differences in conditions that vary between different types of network elements such as ATM switches, SONET/SDH elements, LAN elements, etc. Each of the NEM servers 3-1 through 3-4 includes a node discovery 38 and an element-access module 39. Further, a client interface 40 provides GUI based on information obtained from the service-management server 1.

Fig.5 is an illustrative drawing showing a system configuration based on components.

In Fig.5, components of Fig.4 are shown in a hierarchical structure, which separates element-type-dependent objects and element-type-independent objects. Further, the element-type-dependent objects are classified into network-type-dependent objects and network-type-independent objects. As shown in Fig.5, the element-access module 39 is attached to each network element such as an ATM switch in the network 5, and absorbs element-type-dependent differences of conditions. Each of the local-domain managers 35 through 37 is provided for a network of a different type, and absorbs differences in conditions that differ

depending on a network type such as ATM, SONET, SDH, IP, etc.

The multi-domain manager 34 attends to overall control of the network 5. The client interface 40 provides the GUI based on the information obtained from the service-management server 1. The user manager 33 of Fig.4 is used for controlling relations between passwords and views where these passwords are required when a user (network administrator) accesses the GUI. The node discovery 38 performs a function to add or delete a network element as the network element newly becomes an object for management or becomes obsolete as an object for management. This achieves dividing of processes by network areas.

Fig.6 is a table showing database items.

The database includes database items, information obtained from network elements, and conversion methods. Fig.6 shows a network configuration, a node condition, a link condition, a connection route, and a connection condition as examples of database items relating to the service-management server 1. With regard to the connection route, for example, information is collected from cross-connect devices of a network, and a connection route is established by connecting the cross-connect devices together. When there is a change in the cross-connect devices, information about the route is modified partially. When there is no cross connection any longer, the connection route is deleted from the database.

Fig.7 is a table showing database items relating to reconstruction.

The database includes, as events, a node failure, a node failure recovery, a connection creation, a connection modification, a connection deletion, and a user request. These events are provided as entries together with expected

modifications and items to be collected. The user request is made by a user (i.e., a network administrator or a service administrator). With regard to the event of the connection creation, for example, addition of a new connection is expected as a modification, and a route of the added connection is an item to be collected.

Figs.8 and 9 are illustrative drawings showing a configuration of the database.

The database is divided into a network-configuration-information unit 51 and a view-configuration-information unit 52. Connections between these two units are shown in Figs.8 and 9 by numerals (1) through (5).

Figs.10A and 10B are tables showing the contents and descriptions of the contents with respect to database items shown in Figs.8 and 9.

Fig.10A shows database items relating to network-configuration information. JVvNode represents nodes, for example, and stores therein information about network elements. By the same token, JVvLink represents links, and stored therein information about communication lines between the network elements. Fig.10B shows database items relating to view-configuration information. JVvView represents views, for example, and stores therein information used for management of a plurality of views. JVvViewDomain represents domains, and indicates a unit of control into which a view is divided.

Ports and connections are linked as network-configuration-information items so as to make it possible to detect a connection failure at the time of a port failure. Further, three network-configuration-inforamtion items, i.e., the node JVvNode, the link JVvLink, and the connection JVvConnection, are registered in the view configuration as a view node JVvViewNode, a view link JVvViewLink, and a view

connection JVviewConnection. This makes these items an object for management. In this manner, a view XXX as a view-configuration-information item is linked to a network-configuration-information item XXX, so that it is possible to detect a condition change simultaneously in a plurality of views when the network-configuration-information item XXX has a change in the condition thereof. This configuration eliminates inconsistency between different views.

Figs.11A through 11C are illustrative drawings for explaining logical network configurations. Figs.11A and 11B show a case in which network elements connected to ports of a node being managed are defined as edges, and Fig.11C shows a case in which a virtual terminal is connected at either end of a connection.

In Fig.11A, a plurality of connections (logical network) are established between a pair of edges, and intervening network elements are hidden from the view, thereby showing only the connections between the edges. In Fig.11B, edges are defined, and a network configuration including nodes and links is presented by showing network elements such as switches that have connections passing therethrough. In Fig.11C, a network configuration is shown as having a virtual terminal connected to either end of a connection. Although Fig.11C shows network elements along with the connections, these intervening network elements such as switches may be hidden from the view.

Figs.12A through 12D are illustrative drawings for explaining a trace display.

Fig.12A shows a logical network configuration comprised of edges 61 through 65 and connections therebetween, and corresponds to the case of Fig.11A. By selecting the edges 61 and 64, for example, the corresponding connection is displayed as a thick line as shown in Fig.12B. Fig.12C shows a physical network configuration comprised of edges and network elements,

and corresponds to the case of Fig.11C. The edges 61 through 65 are connected via network elements 66 through 69. A point in the network is selected, and a connection is traced from the selected point until the trace reaches an edge. The traced connection is then displayed. As shown in Fig.12D, for example, a trace from the edge 61, the network element 66, the network element 69, the network element 68, to the edge 64 is displayed by using thick lines. In this example, distinctions are made by use of thick lines and thin lines, but may be made by using different colors.

Fig.13 is an illustrative drawing showing multiple views. Fig.13 shows a case in which a VOD service is provided. In a system of Fig.13, a VOD server 71 and a VOD client 72 are connected via ATM switches 73 and transit devices 74. A network-control terminal 75 displays a network configuration based on control information 78 that is provided specifically for a network administrator or a service administrator of this terminal. By the same token, network-control terminals 76 and 77 display respective network configurations based on control information 79 that is provided specifically for network administrators or service administrators of these terminals.

As shown in Fig.11A, the network-control terminal 76 displays connections between the edges (i.e., between the OVD server 71 and the VOD client 72). The network-control terminal 77, as shown in Fig.11B, presents physical network configuration including the edges and the network elements. When a failure is indicated in the logical network configuration displayed on the network-control terminal 76, for example, the physical network configuration shown on the network-control terminal 77 is used so as to inform the network administrator of a location of the failure in the network. The network administrator can then attend to recovery.

Network elements and/or network types can be added by modifying the network-configuration information and the view-configuration information, and API (application programming interface) that provides information necessary for a network administrator is defined. API is activated with respect to device-type-dependent objects or network-type-dependent objects that are newly added, thereby making it possible to modify the database and the GUI display. Such modification includes creation/modification/deletion of nodes, links, and connections, modification of connection routes, recovery of node failures and port failures, creation/modification/deletion of view nodes, view links, view connections, domains, edges, views, service templates, separate-failure definitions, and service-failure definitions, etc.

Multi-vendor network elements include a device having only a single slot to insert a card and a device which can accept two cards. Not only such differences in device structures but also differences in parameter settings attribute to differences between network elements (devices). Further, all the network elements in the network are often not in compliance with the same standards. For example, a new-version element and an old-version element may coexist with respect to different vendors.

In consideration of this, data for representing a port is controlled as a character string that can be recognized by element-access modules EAM each provided specifically for a particular device type (element type). The character string represents a port address. Further, the local-domain manager LDM and the multi-domain manager MDM recognize the character string of the port address as data that simply represents a single port, and are not aware of details of the character strings.

Representation of connections is also

different depending on network types. In an ATM network, a connection corresponds to a virtual channel, and is represented by VPI/VCI values. Other types of networks, however, do not employ such representation. In consideration of this, data representing a connection is controlled as a character string that can be recognized by local-domain managers LDM and multi-domain managers MDM each provided specifically for a particular network type. This character strings represents a connection address.

A cause and details of a failure differs from network element to network element. Because of this, the network-service-control system generalizes a failure of each network element, and converts the failure into a failure level for the management purposes. Element-type-dependent objects control relations between failure labels and failure levels. Namely, an element-type-dependent object analyzes a failure code received from a network element, and converts the code into a failure label. Then, the failure label, which is device-dependent, is converted into a failure level.

Fig.14 is an illustrative drawing for explaining failure labels and failure levels. Fig.14 shows relations between failures (failure labels) and failure levels with respect to network elements A and B. Here, the failure levels are provided in two folds, i.e., in terms of physical failures as well as service failures. A failure of a hard-drive device of the network element A, for example, is regarded as a serious failure as a physical failure, and is regarded as a failure as a service failure since there is a possibility that the service has to be stopped. A failure of a ventilator fan of the network element B is treated as a warning in terms of the physical failure (to alarm a possible temperature hike), and is treated as a normal condition in terms of the service failure

since the service can continue.

Further, a power malfunction of the network element B is a minor failure as a physical failure level, and is regarded as a normal condition as a service failure level.

Figs.15A and 15B are illustrative drawings for explaining failure-level information. Fig.15A shows physical-failure-level information, and Fig.15B illustrates service-failure-level information.

When a failure name (corresponding to the failure level of Fig.14) is "warning", a failure level is "-1". Further, a color of icon is gray, and an alarm-sound ID is "0". When a failure name is "normal", a failure level is zero, and an icon color is green with an alarm-sound ID being "0". Further, a failure name "serious failure" corresponds to a failure level "3", an icon color "red", and an alarm-sound ID "3". When a failure name is "normal" in the list of service failures of Fig.15B, a failure level is "0", and an icon color is green with an alarm-sound ID being "0". A failure name "failure" corresponds to a failure level "1", an icon color "red", and an alarm-sound ID "1".

Fig.16 is an illustrative drawing for explaining failure labels, physical-failure levels, and service-failure levels. Fig.16 shows an example of a network ATM switch.

When a failure label is "clock failure", for example, a physical-failure level is "3", and a service-failure level is "1". When a failure label is "UPS failure" (UPS: unstoppable power source), a physical-failure level is "3", and a service-failure level is "1". Further, a temperature failure corresponds to a physical-failure level "2" and a service-failure level "0". In this manner, relations between failure labels and failure levels are defined with respect to each network element, and are

controlled by using a table format.

Fig.17 is an illustrative drawing showing definitions of failure levels.

Network-element-management units 81 through 83 correspond to the element-access module 39 of Fig.4, and have a function to absorb device-type-dependent differences. The network-element-management units 81 through 83 assign failure levels to failure labels that are defined with respect to network elements A, B and C. The failure levels are unique in the entire system. The failure levels indicate a degree of an effect that is taken on data flows running through connections. A failure level "0" indicates a normal condition, and a failure level "1" indicates a warning (no effect at present). Further, a failure level "2" represents a minor failure (some effect on part of services), and a failure level "3" corresponds to a serious failure (stoppage of service). In addition, a failure level "4" indicates a critical condition (service may be stopped for a long time).

The network-element-management unit 81 provided for the network element A assigns a failure level "1" to a clock failure, a failure level 2 to a switch failure, and a failure level 3 to an adaptor failure. In the network-element-management unit 82 provided for the network element B, a clock failure has a failure level "1", and a hard-drive failure has a failure level 2. This means that a hard-drive failure may affect part of services.

The network-element-management units 81 through 83 keep record of statuses of the network elements A through C by trapping or polling the network elements A through C. The network-element-management units 81 through 83 attend to control by distinguishing failures regarding the entire node from failures regarding a port that is part of the node. A failure of a port only affects a connection that uses this

port. A failure of the entire node, on the other hand, affects all the connections relating to the node. It should be noted, however, that a failure of a port may affect other ports.

Fig.18 is an illustrative drawing for explaining a spill-over effect of a port failure.

In Fig.18, a node 90 of a network 5 includes ports 91 through 98. When a failure occurs at the port 95 which is shown by a solid circle, connections #1 and #2 are affected since the ports 91 and 92 are connected to the failed port 95.

The network-element-management units 81 through 83 collect information about failures of nodes and ports by a polling process or a trap process. When failures are observed at a node or a port, the highest failure level of all is retained as a failure level of this node or port. The highest failure level is compared with a prior failure level, and is reported as an event to other objects if the comparison indicates a change. In Fig.17, for example, the network-element-management unit 81 retains the highest failure level "3", and the network-element-management unit 82 retains the highest failure level "2". By the same token, the network-element-management unit 83 maintains the highest failure level "3".

A failure level of each connection is detected by a failure-level-change event of a node or a port. If a plurality of nodes or ports suffer failures along a route of a given connection, the highest failure level of all is regarded as a failure level of the given connection. When a failure level of a connection changes, an event is issued.

Fig.19 is a flowchart of a process performed at the time of a failure-level change.

Fig.19 shows schematic operations of a network element, a corresponding network-element-management unit, a network-management unit, a database,

a GUI, and an event-management unit. The network-element-management unit serves to absorb differences in various failure information between network elements of different types. A request by a GUI user (network administrator or service administrator) initiates an operation of the database to collect network-configuration information. Based on the obtained network-configuration information, a topology map (physical network) and a service map (logical network) are displayed.

When obtaining the network-configuration information, the database requests the network-management unit to collect the network-configuration information, and the network-management unit transfers the collected network-configuration information to the database. Further, the network element informs the network-element-management unit of failure information through a trapping operation triggered by the failure or through a polling operation. The network-element-management unit obtains a failure level, and determines the highest failure level. The network-element-management unit further compares the highest failure level with the prior highest failure level, and informs the event-management unit of a change in a node-failure level if the comparison finds a change. If the comparison finds no change, the highest level is determined with respect to a port. Failure checks are supposed to be performed separately between a node and a port. Therefore, a failure check is made with respect to a port even if there is a change in the node.

In response to the notice of the change in a failure level, the event-management unit informs the GUI, the database, and the network-management unit of the change in a node-failure level. In response, the GUI updates the topology map, and the database updates the contents thereof. Also, the network-management

unit checks a connection-failure level to determine if there is a change from a previous connection-failure level. If there is no change, a check of a link-failure level is made. If there is a change from the previous connection-failure level, the change in a connection-failure level is reported to the event-management unit. This procedure is repeated as many times as there are connections.

The network-element-management unit checks the highest failure level of the port, and determines if there is a change from the previous one. If there is no change, the procedure ends. If there is a change, the network-element-management unit notifies the event-management unit of the change in a port-failure level. This operation is repeated as many times as there are ports. The event-management unit, responding to the notice of the change in a port-failure level, forwards the notice to the network-management unit and the database. The database updates the contents thereof, and the network-management unit checks a link-failure level to see if the link-failure level is changed from the previous one. In there is no change, the procedure ends. If there is a change, a change in a link-failure level is reported to the event-management unit. The event-management unit then informs the database and the GUI of this change. The database updates the contents thereof, and the GUI updates the topology map. A check of a connection failure may be made from port failures.

Fig.20 is a flowchart of a process of creating multiple views.

Fig.20 shows schematic operations of a network-element-management unit, a network-management unit, a view-management unit, a database, a GUI, and an event-management unit. A network administrator or a service administrator using the GUI requests the view-management unit to create a view. In response, the

view-management unit requests the database to collect network-configuration information. Based on the collected network-configuration information, view configurations are obtained in accordance with conditions specified in the view-creation request. The obtained view configurations are registered in the database.

The database informs the view-management unit of a completion of the view-configuration registration. In response, the view-management unit notifies the GUI of a completion of view creation. The GUI requests the view configuration registered in the database, and displays a topology map (physical network) and a service map (logical network) in accordance with the view configuration obtained from the database.

When the network element sends a node-failure-level-change notice to the event-management unit, the event-management unit notifies the network-management unit, the view-management unit, and the database of this fact. The network-management unit checks a connection-failure level, and decides whether there is a change from a previous level. If there is a change, the network-management unit informs the event-management unit of a connection-failure-level change.

The view-management unit obtains relevant views in response to the notice from the event-management unit, and reports a change in a view-node-failure level to the event-management unit. In response, the event-management unit requests the GUI to change the topology map, and the GUI attends to the updating process.

In response to the notice of the connection-failure-level change from the network-management unit, event-management unit informs the view-management unit and the database of this fact. The view-management unit then obtains relevant views, and reports a change in a view-connection-failure level to the event-

management unit. Also, the database updates the contents thereof.

The event-management unit receives the notice of the change in a view-connection-failure level from the view-management unit, and reports this to the GUI. The GUI updates the service map accordingly. In the above procedure, if there is no change in the connection-failure level from the previous one, the procedure comes to an end.

One way to create views is to select all the network elements and communication lines that a user (network administrator or service administrator) desires to display, and such a selection is made on the GUI (i.e., on a network-configuration layout). Connections provided by the selected network elements and the communication lines are automatically extracted and registered as the views.

Another and second way to create views is to select all the connections that the user wishes to register as views, and such a selection is made on the GUI which shows a list of all the connections managed by the network-management system. All the network elements and communication lines that make up the selected connections are automatically extracted and registered as the views. A third way to create views is to select all the terminals (ports of network elements) that the user wishes to register, and such a selection is made on the GUI of the network-management system. All the connections that are connected to the selected terminals are automatically extracted and registered as the views. Connections, network elements, and communication lines that are added during operations are added to the views in real time.

A fourth way to create views is to select attribute conditions on the GUI of the network-management system with regard to connections the user desires to register as the view. The system

automatically extracts all the connections that match the selected conditions as well as network elements and communication lines relating to the extracted connections, and registers these as the views. Connections, network elements, and communication lines that are added during operations are added to the views in real time. A fifth way to create views is to select, on the GUI of the network-management system, names of services that the user wishes to register as the views. As the same in the above, connections, network elements, and communication lines that are added during operations are added to the views in real time.

A sixth way to create views is that the user selects edges on both ends of routes running through the network so as to extract intervening paths and network elements between the selected edges. When there is a change during system operations, the contents of the views are updated based on the database.

The user who created the views as described above is provided with an authorization to update views and set/delete connections used in the views. Further, if a user creates the views for one or more services, the user can access the views, and, also, can select other users who can access the views.

In general, networks are comprised of network elements provided by more than one vendor. In such a network having a multi-vendor environment, settings of connections may not be made in the same fashion between different network elements because of differences in parameters to be used. In consideration of this, connection attributes are defined with respect to each of the provided service. This is done in such a manner as to comply with established standards such as those of the ITU-T.

Fig.21 is an illustrative drawing showing an

example of definition files used in a multi-vendor environment. Fig.21 shows a case where definitions are provided for connection settings.

As shown in Fig.21, a service-definition file 101 is created with respect to each service 100. The service-definition file 101 is so created as to comply with certain standards as described above. Further, cross-connect-setting-definition files 104 through 106 are provided to be service-type dependent or device-type dependent, and conversion rules 104 are generated on a device-type-wise basis so as to provide conversion rules between the service-definition file 101 and the cross-connect-setting-definition files 104 through 106.

The cross-connect-setting-definition files 104 through 106 are created on the device-type-wise basis or on the service-type-wise basis as described above. The contents of the cross-connect-setting-definition files 104 through 106 are as follows.

A) Network Element 1

ServiceName = VOICE;
QoS = 1;
Assing = Peak;
CR = 100; and so on

B) Network Element 2

ServiceName = VOICE;
ConnType = both;
ServiceCategory = CBR;
PriorityClass = high;
PCR_CLP0 = 12;
PCR_CLP0+1 = 12;
OAM = ON; and so on

Fig.22 is an illustrative drawing for explaining making of cross-connect settings.

At the time of connection setting, element-access modules 113 and 114 are used for making cross-connect settings to network elements 115. Parameters necessary in this process include common parameters

such as input-side connection addresses and output-side connections addresses as well as device-type-dependent (device-specific) parameters. The element-access modules 113 and 114 receive common parameters and service names from an upper-level component 111, and looks for device-specific parameters based on the service names. Here, the device-specific parameters are kept in a storage of a database 112. The element-access modules 113 and 114 thus can make cross-connect settings by using the common parameters and the device-specific parameters.

Fig.23 is an illustrative drawing for explaining registration of device-specific parameters.

A set of service-definition files includes a common service-definition file 116 and device-specific service-definition files 117 through 119. Only one common service-definition file 116 is provided in the system, and is used for controlling service names and descriptions of the services. The device-specific service-definition files 117 through 119 are provided on the device-type-wise basis. When the device-specific service-definition files 117 through 119 are registered in the database 112, all the device-specific parameters are updated with respect to devices which are to be controlled by the service-definition files.

A format of the common service-definition file 116 may be as follows, for example.

```
statement := definition-statement¦comment-statement
definition-statement := ' Service='name','description
comment-statement := '#'comment¦[blank line]
name := [character string]
description := [character string]
comment := [character string]
```

Definitions of service names and services may be as follows.

```
Service = [name, description]
Service = [name, description]
```

•
•
•

For example, these definitions may be given as follows.

```
Service = VOD, VOD service
Service = Audio, Audio service
```

A blank line or a line starting with "#" is regarded as a comment line. A format of the device-specific service-definition files 117 through 119 may be as follows.

```
statement := selection-statement¦
             definition-statement¦comment-statement
selection-statement := 'ServiceName='name
definition-statement := key'='value
comment-statement := '#'comment¦[blank line]
name := [character string]
key := [character string]
value := [character string]
comment := [character string]
```

Selection sentences, definition sentences, comment sentences, and so on are also defined. A definition of the selection sentence defines device-specific-parameter values, and the element-access modules define keys specifically with respect to respective device types.

Fig.24 is an illustrative drawing showing a procedure of cross-connect setting.

When a network administrator or a service administrator requests to add a service definition by using the GUI, the database returns a response to the GUI. Then, the GUI notifies the event-management unit of an addition of a service. The event-management unit sends a relevant request to the network-element-management unit. The network-element-management unit requests the database to obtain the service definition, and the database sends the requested service definition

to the network-element-management unit.

Further, the GUI sends a connection-setting request to the network-management unit. The network-management unit determines a route in accordance with the connection-setting request, and sends a cross-connect-setting request to each of the network-element-management unit that relates to the determined route. In response to the cross-connect-setting request, the network-element-management unit changes parameters in accordance with the service definition, and makes cross-connect settings to a relevant network element (i.e., a cross-connect device). After receiving a notice of completion of setting from the network element, the network-element-management unit notifies the GUI of the completion of cross-connect setting via the network-management unit.

Fig.25 is an illustrative drawing for explaining setting of a route.

In Fig.25, triangle symbols (1)-(8) represent edges, and letters A-J encircled or put in a square represent nodes. Further, letters (a)-(k) and (a1)-(a15) indicate links. Thin lines are used for a single link, and thick lines are used for a plurality of links. A physical network configuration is presented as a view as shown in Fig.25. Then, a blue color may be used for representing a unselected status or a no-setting status, and a yellow color may be used for indicating a selected status of a route (but details are not yet set). Further, an orange color may mean a selected status of a route with details thereof being set, and a gray color may indicate that all the settings are made to a route.

Details of settings indicate which one of a plurality of links is selected if there is more than one link, and show a selected status if there is only one link. In the case of a node, details of settings determine all items of route-specific attributes. In

the case of an edge, details of settings indicate a selected status at all times.

At an initial status, no setting is in place, so that every element is displayed in blue. When a route is to be established between the edges (1) and (7) of Fig.25 in the case of point-to-point permanent virtual circuits (P-P PVC), the edge (1) is first selected. As a result, the edge (1) is displayed in orange. Thereafter, a node A connected to the edge (1) is selected, thereby adding the link (a) to the route. As a result, the link (a) as well as the edge (1) are shown in orange, and the node A is presented in yellow, indicating that the route is selected but details are not yet set.

After this, the node D along the route toward the edge (7) is selected to indicate the link (a2) between the node A and the node D. By doing this, an output-side port of the node A and an input-side port of the node D are automatically set based on the configuration information about the nodes A and D. The links (a1) is shown in orange, and the node D is displayed in yellow.

In the same manner, the nodes G and J are selected to elect the links (a7) and (a10), thereby determining the route between the edge (1) and the node J. Finally, the edge (7) is selected to complete the route, so that the links (1), (a2), (a7), (a10), and (j) as well as the node A, D, G, and J are shown in orange indicative of a status that details are set. After confirming what is displayed, a cross-connect request is issued. In response, cross-connect-setting information matching each node type is sent out from the database. With respect to the node G, for example, cross-connect-setting information for connecting the links (a7) and (a10) together is obtained. In this manner, the route as shown in dashed lines is established between the edge (1) and the edge (7),

allowing communication therebetween.

In the case of the edge (7) being a VOD server, for example, a service administrator of the VOD service displays a view of the VOD service, and attends to connection settings by following the procedure as described above based on the displayed view. Alternatively, the edges (1) and (7), for example, are selected, and a route connecting between the selected edges (1) and (7) may be automatically selected in such a manner as to employ as small a number of nodes and links as possible based on the network-configuration information.

Further, canceling of a route selection is possible. For example, the selection of the route of the above example needs to be canceled by starting from the node G. When selections of the link (a7), the node G, the link (a10), the node J, and the edge (7) are nullified, information on the output-side port of the node D is reset, so that the node D falls into a status of no-detail setting. As a result, the node D is changed from an orange color to a yellow color. Starting from this condition, the nodes F, I, G, and J may be selected successively so as to establish a different route between the node (1) and the node (7).

Fig.26 is an illustrative drawing for explaining setting of a route that includes virtual links. Fig.26 shows a case where P-P S-PVC is employed, and uses the same reference numerals and letters for the same elements as those of Fig.25.

In Fig.26, the edge (1), the link (a), the node A, and the link (a1) are already set with regard to details thereof, and the node F has a route-specific attribute thereof set to S-PVC Calling. When the node G is added to the route, a virtual link shown by a dotted line is displayed despite the fact that there is no physical link between the node F and the node G. This virtual link is presented in orange.

After this, the node J is selected to choose the link (a10) between the nodes G and J, and the edge (7) is selected to choose the link (j). As a result, a route is established between the edge (1) and the edge (7) via the link (1), the node A, the link (a1), the node F, the virtual link, the node G, the link (a10), the node J, and the link (j). IF the node I is selected rather than selecting the node G, the link between the nodes F and I is displayed by a dotted orange line indicative of a virtual link despite of the fact that there is a physical link (a4) between the nodes F and I.

When the route selection is canceled by using the node G as a base point, only a selection on the S-PVC Called side is reset. As a result, a route made up from the edge (1), the link (a), the node A, the link (a1), and the node F remains after the canceling of the selection. If the route selection is canceled by using the node F as a base point, the selection is reset on both the S-PVC Calling side and the S-PVC Called side.

Fig.27 is an illustrative drawing for explaining setting of a route which includes a node that can divide a route.

When the node G that can divide a route is included along the route indicated by dotted lines between the edge (1) and the edge (7), the node I can be selected by indicating the node G as a base point. When this selection is made, the link (a8) between the node G and the node I is automatically set. Then, the edge (5) and the link (g) are selected, for example, so that a route between the edge (1) and the edge (5) is established. Further, if the node B is selected by using the node G as a base point, the link (a9) is automatically set between the node G and the node B. In this manner, the route indicated by dotted lines is established between the edge (1) and the edge (7) along with the branch routes originating from the node G.

Canceling of the selection is performed in the same manner as described in the previous example. When the node I is used as a base point to cancel the selection, a route from the node G to the edge (5) is reset. Namely, the node I, the link (a8), the link (g), and the edge (5) are canceled. It should be noted that settings can be made to another branch route after the canceling of selection.

As described above, the present invention controls views on a service-wise basis when a plurality of services are provided by a network. Further, when a failure occurs, it is easy to evaluate whether the failure affects services, making it easier to layout a countermeasure for the failure. Moreover, the preset invention provides a means that allows connection settings to be easily made with respect to each service, and absorbs differences in device types when multi-vendor network elements are used. Such means makes it easier to add/delete an object to be managed.

Further, the present invention is not limited to these embodiments, but various variations and modifications may be made without departing from the scope of the present invention.

The present application is based on Japanese priority application No. 11-003645 filed on January 11, 1999, with the Japanese Patent Office, the entire contents of which are hereby incorporated by reference.

WHAT IS CLAIMED IS

1. A method of controlling a network which includes network elements connected via links, and provides services, comprising the steps of:

creating view-configuration information based on network-configuration information with respect to each of the services such that the view-configuration information is related to the network-configuration information; and

displaying a view based on the view-configuration information with respect to each of the services, the view including both or either one of a physical network configuration of the network and a logical network configuration of the network.

2. The method as claimed in claim 1, wherein said step of creating includes the steps of:

selecting network elements and links from a network configuration represented by the network-configuration information; and

creating the view-configuration information according to the selected network elements and links.

3. The method as claimed in claim 1, wherein said step of creating includes the steps of:

selecting a connection from a network configuration represented by the network-configuration

information; and

creating the view-configuration information according to the selected connection.

4. The method as claimed in claim 1, wherein said step of creating includes the steps of:

selecting ports of network elements from a network configuration represented by the network-configuration information; and

creating the view-configuration information according to the selected ports.

5. The method as claimed in claim 1, wherein said step of creating includes the steps of:

specifying attribute conditions of connections; and

creating the view-configuration information by extracting network elements and links relating to at least one connection that matches the specified attribute conditions.

6. The method as claimed in claim 1, wherein said step of creating includes the steps of:

specifying a service name; and

creating the view-configuration information by extracting network elements and links relating to connections that provide the specified service name.

7. The method as claimed in claim 1, further comprising the steps of:

providing matches between failure levels and failure labels with respect to different types of failures, the failure levels indicating significance of failures either as physical failures or as service failures; and

displaying a failure level of a failure occurring in the network in association with the displayed view.

8. The method as claimed in claim 7, further comprising the steps of:

controlling the failures by a unit of a node or a port of a node; and

selecting a failure level of a connection by finding a largest failure level along the connection, and displaying the failure level of the connection in association with the displayed view.

9. The method as claimed in claim 1, further comprising a step of selecting nodes and links on the displayed physical network configuration to set a route between edges.

10. The method as claimed in claim 1, wherein said step of selecting includes the steps of:

selecting the edges on the displayed physical

network configuration; and

setting the route between the edges by extracting nodes and links so as to use as small a number of intervening edges and links between the selected edges.

11. A system for controlling a network including network elements and links, comprising:

a database which stores network-configuration information and view-configuration information such that the view-configuration information is related to the network-configuration information;

a service-management server which attends to registering and updating of the information stored in the database, and defines views of a physical network configuration and a logical network configuration with respect to each of the services based on the view-configuration information stored in said database;

a network-management server which collects information on configurations of the network elements and the links as well as information on failures, and informs said service-management server of a change in at least one of the configurations and the failures for a purpose of said updating; and

a client which displays both or either one of the physical network configuration and the logical network configuration with respect to said client's own service based on the views defined by said service-management server.

12. The system as claimed in claim 11,

wherein said network-management server includes a failure-level-conversion table that provides matches between failure levels and failure labels with respect to different types of failures, the failure levels indicating significance of failures either as physical failures or as service failures.

13. The system as claimed in claim 11, wherein said service-management server includes a connection-setting unit which controls settings of a connection between edges based on the edges, nodes, and links selected from the physical network configuration.

ABSTRACT OF THE DISCLOSURE

A method of controlling a network, which includes network elements connected via links and provides services, includes the steps of creating view-configuration information based on network-configuration information with respect to each of the services such that the view-configuration information is related to the network-configuration information, and displaying a view based on the view-configuration information with respect to each of the services, the view including both or either one of a physical network configuration of the network and a logical network configuration of the network.

FIG.1

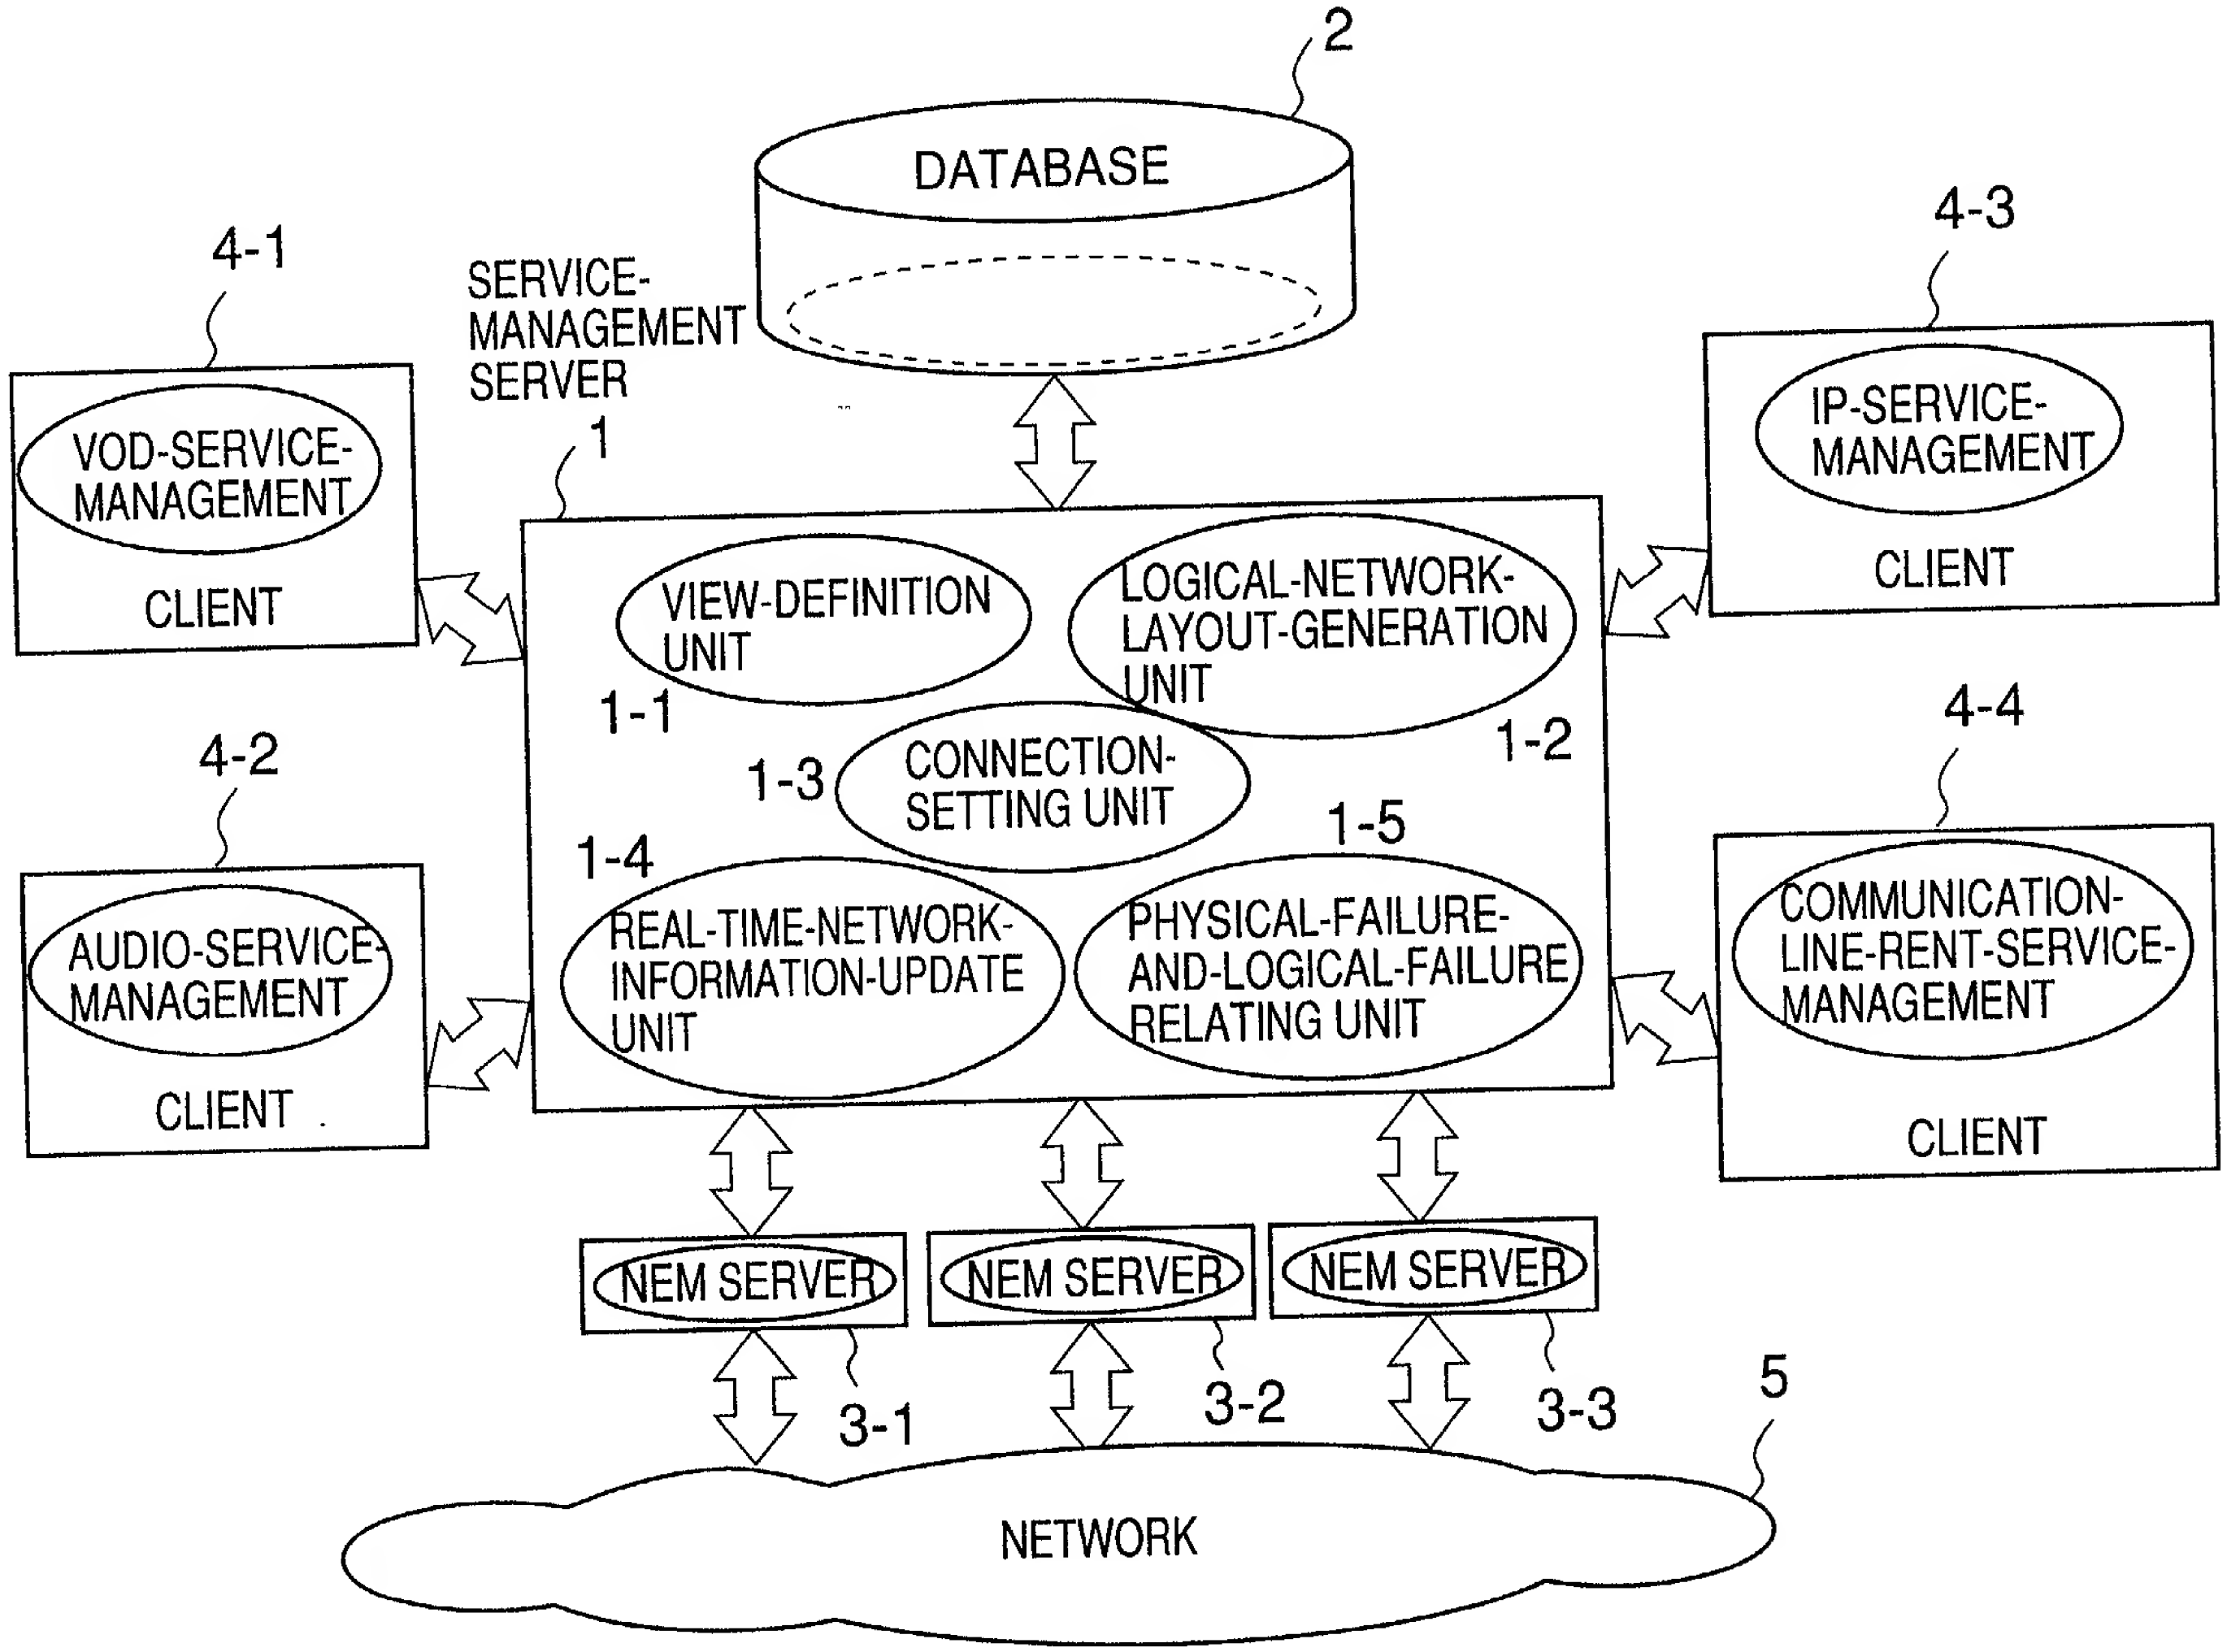

2
DATABASE
SERVICE-MANAGEMENT SERVER
1
VIEW-DEFINITION UNIT
1-1
LOGICAL-NETWORK-LAYOUT-GENERATION UNIT
1-2
CONNECTION-SETTING UNIT
1-3
REAL-TIME-NETWORK-INFORMATION-UPDATE UNIT
1-4
PHYSICAL-FAILURE-AND-LOGICAL-FAILURE RELATING UNIT
1-5
4-1
VOD-SERVICE-MANAGEMENT
CLIENT
4-2
AUDIO-SERVICE-MANAGEMENT
CLIENT
4-3
IP-SERVICE-MANAGEMENT
CLIENT
4-4
COMMUNICATION-LINE-RENT-SERVICE-MANAGEMENT
CLIENT
NEM SERVER
3-1
NEM SERVER
3-2
NEM SERVER
3-3
5
NETWORK

FIG.2

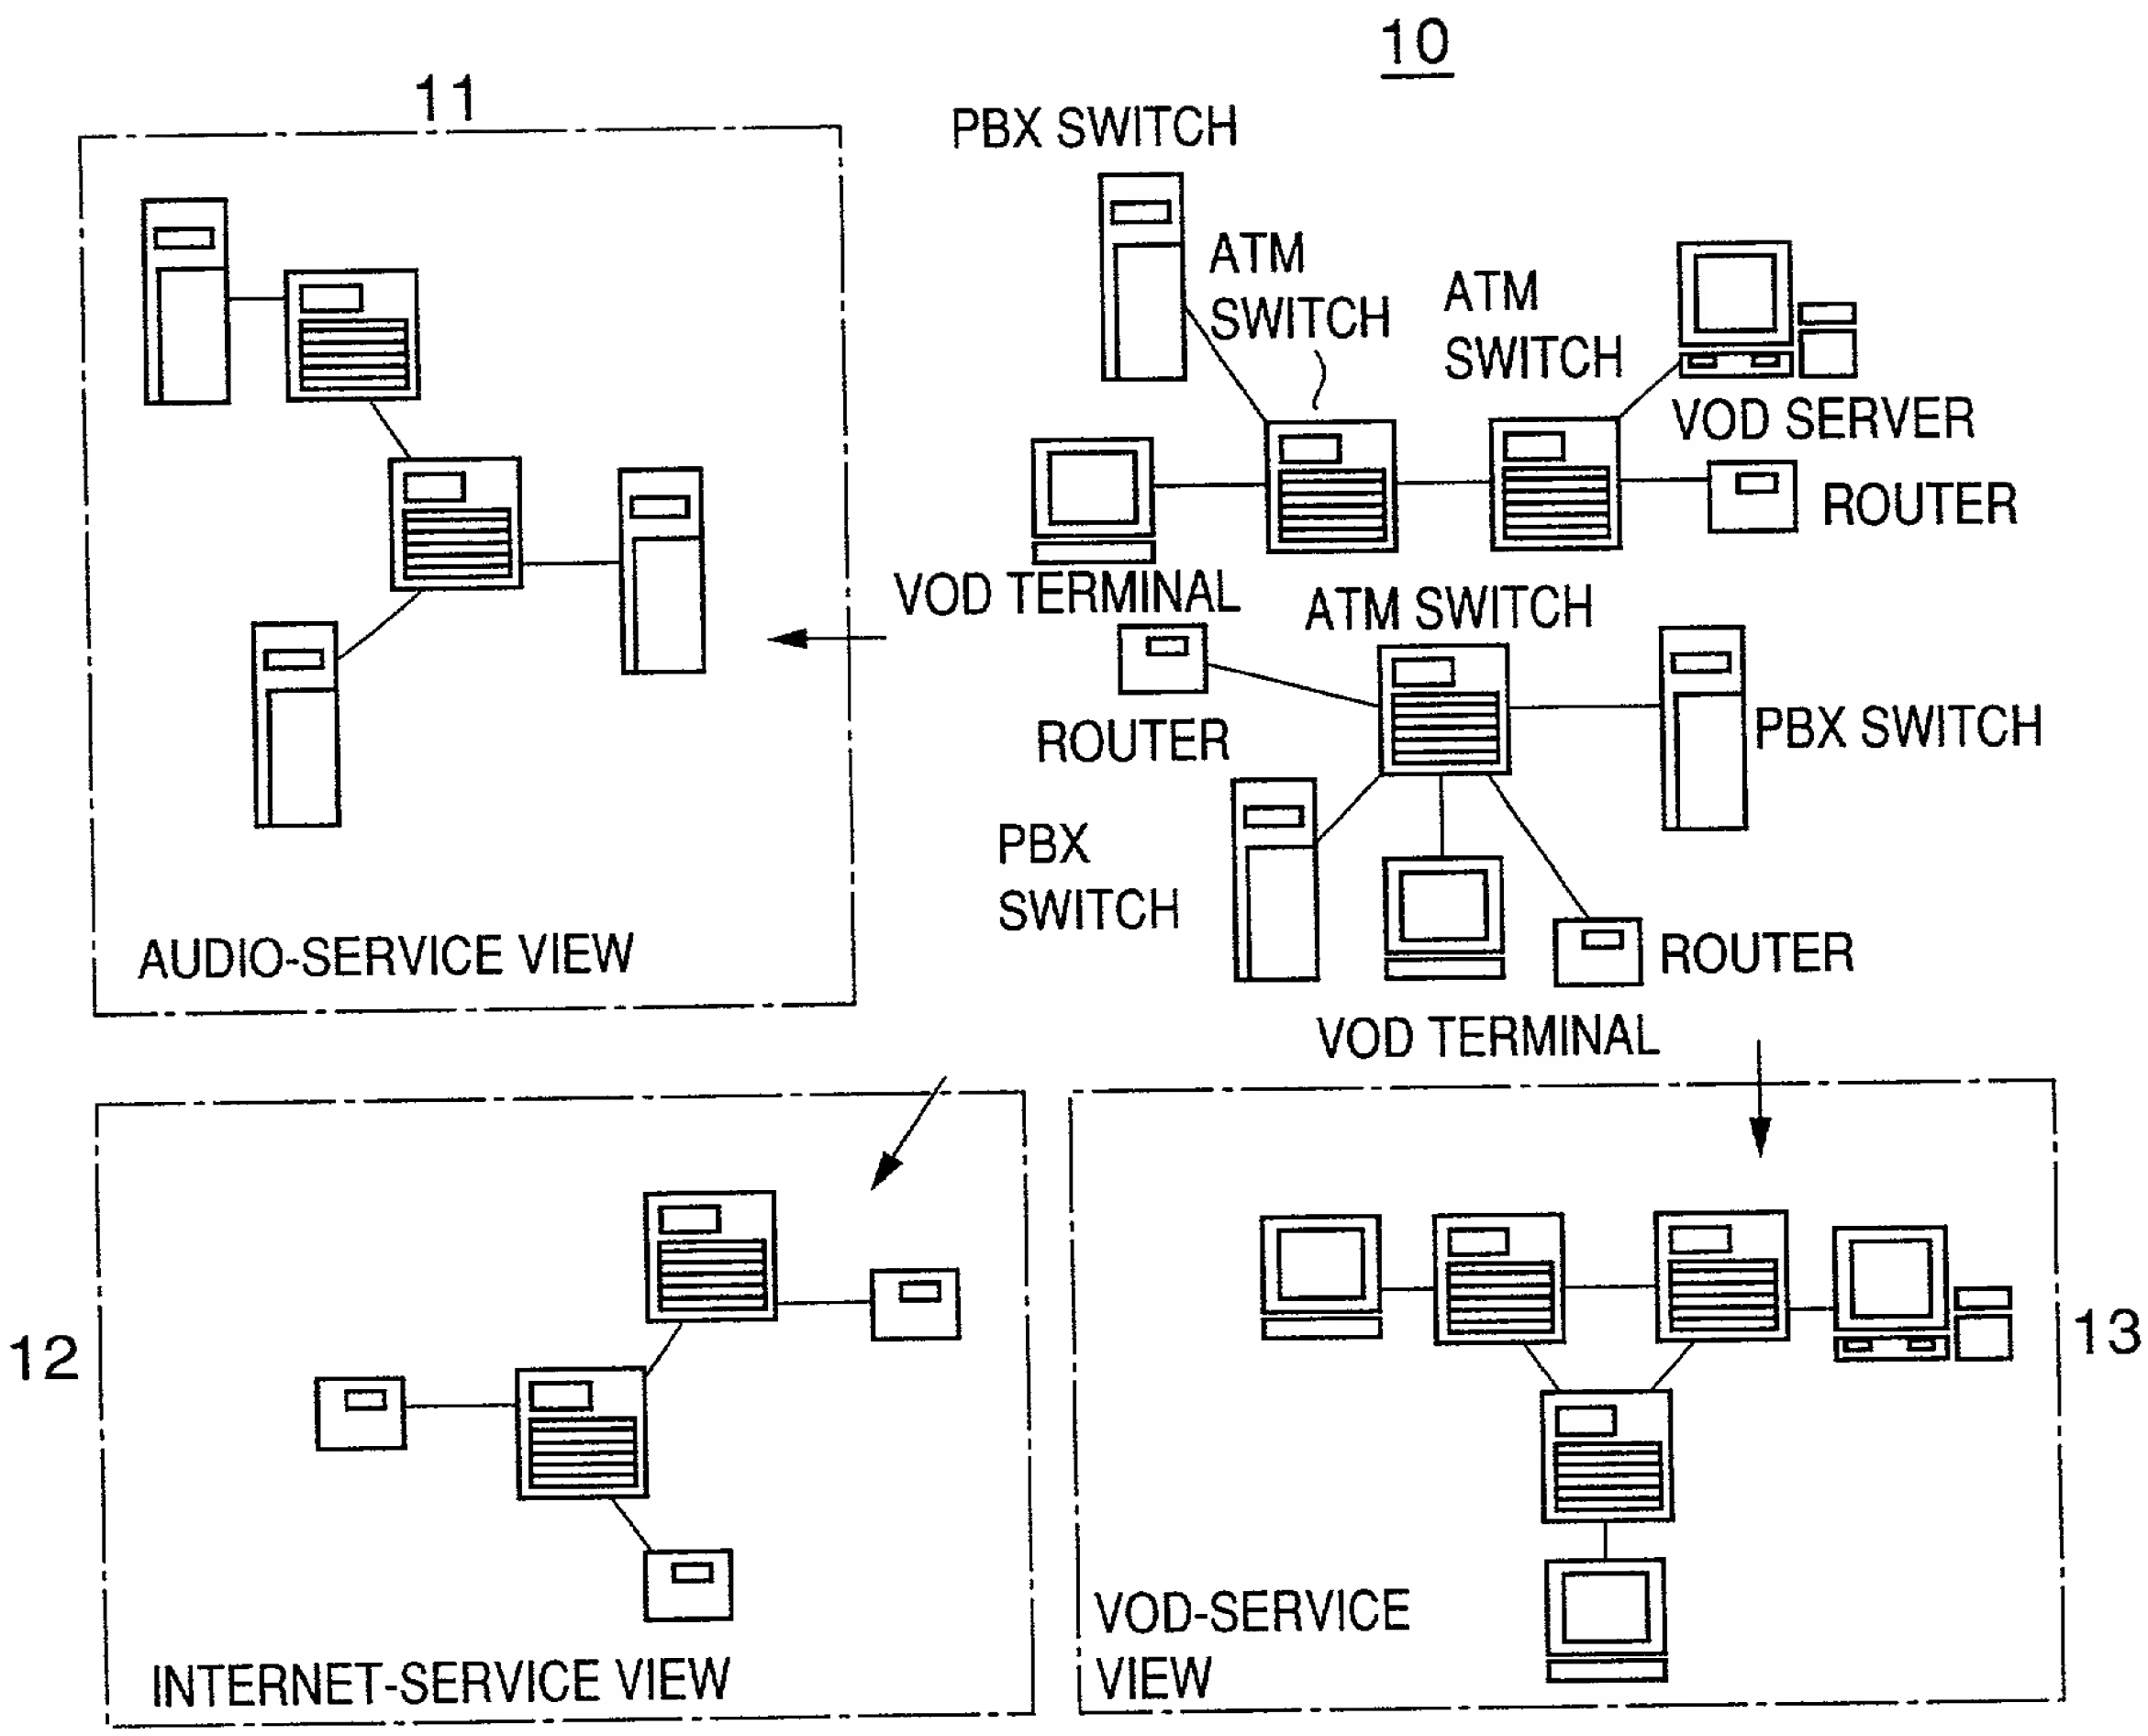
10
11
PBX SWITCH
ATM SWITCH
ATM SWITCH
VOD SERVER
ROUTER
VOD TERMINAL
ATM SWITCH
ROUTER
PBX SWITCH
PBX SWITCH
ROUTER
VOD TERMINAL
AUDIO-SERVICE VIEW
12
INTERNET-SERVICE VIEW
13
VOD-SERVICE VIEW

FIG.3

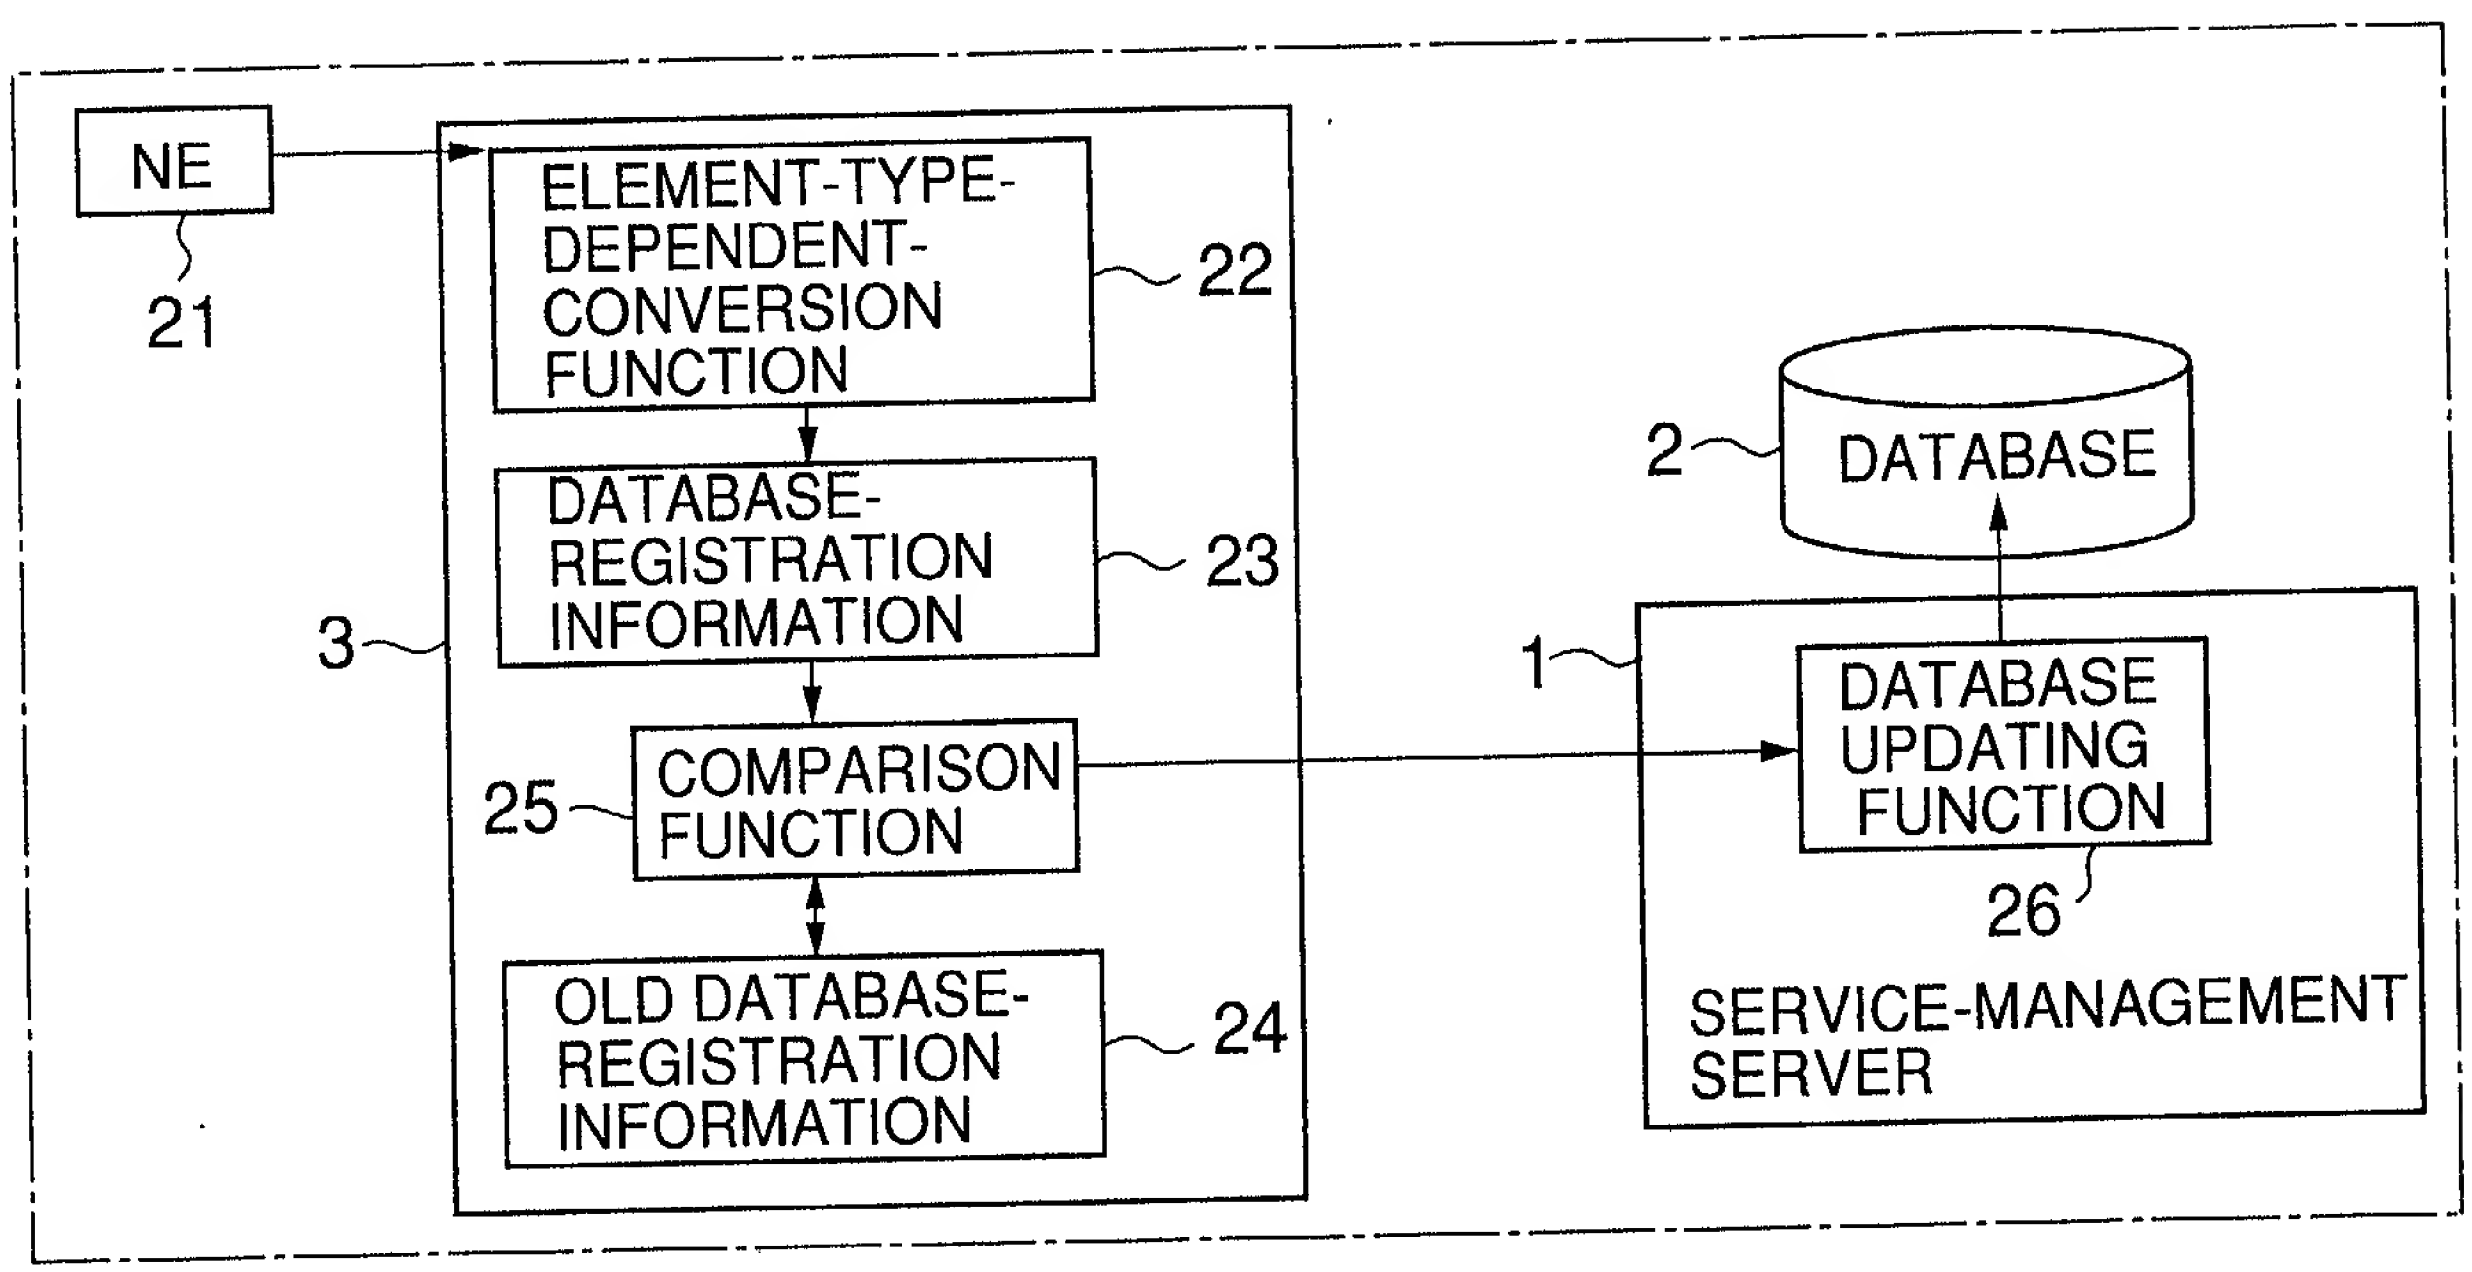
NE
21
ELEMENT-TYPE-DEPENDENT-CONVERSION FUNCTION
22
DATABASE-REGISTRATION INFORMATION
23
COMPARISON FUNCTION
25
OLD DATABASE-REGISTRATION INFORMATION
24
3
DATABASE
2
DATABASE UPDATING FUNCTION
26
SERVICE-MANAGEMENT SERVER
1

FIG.4

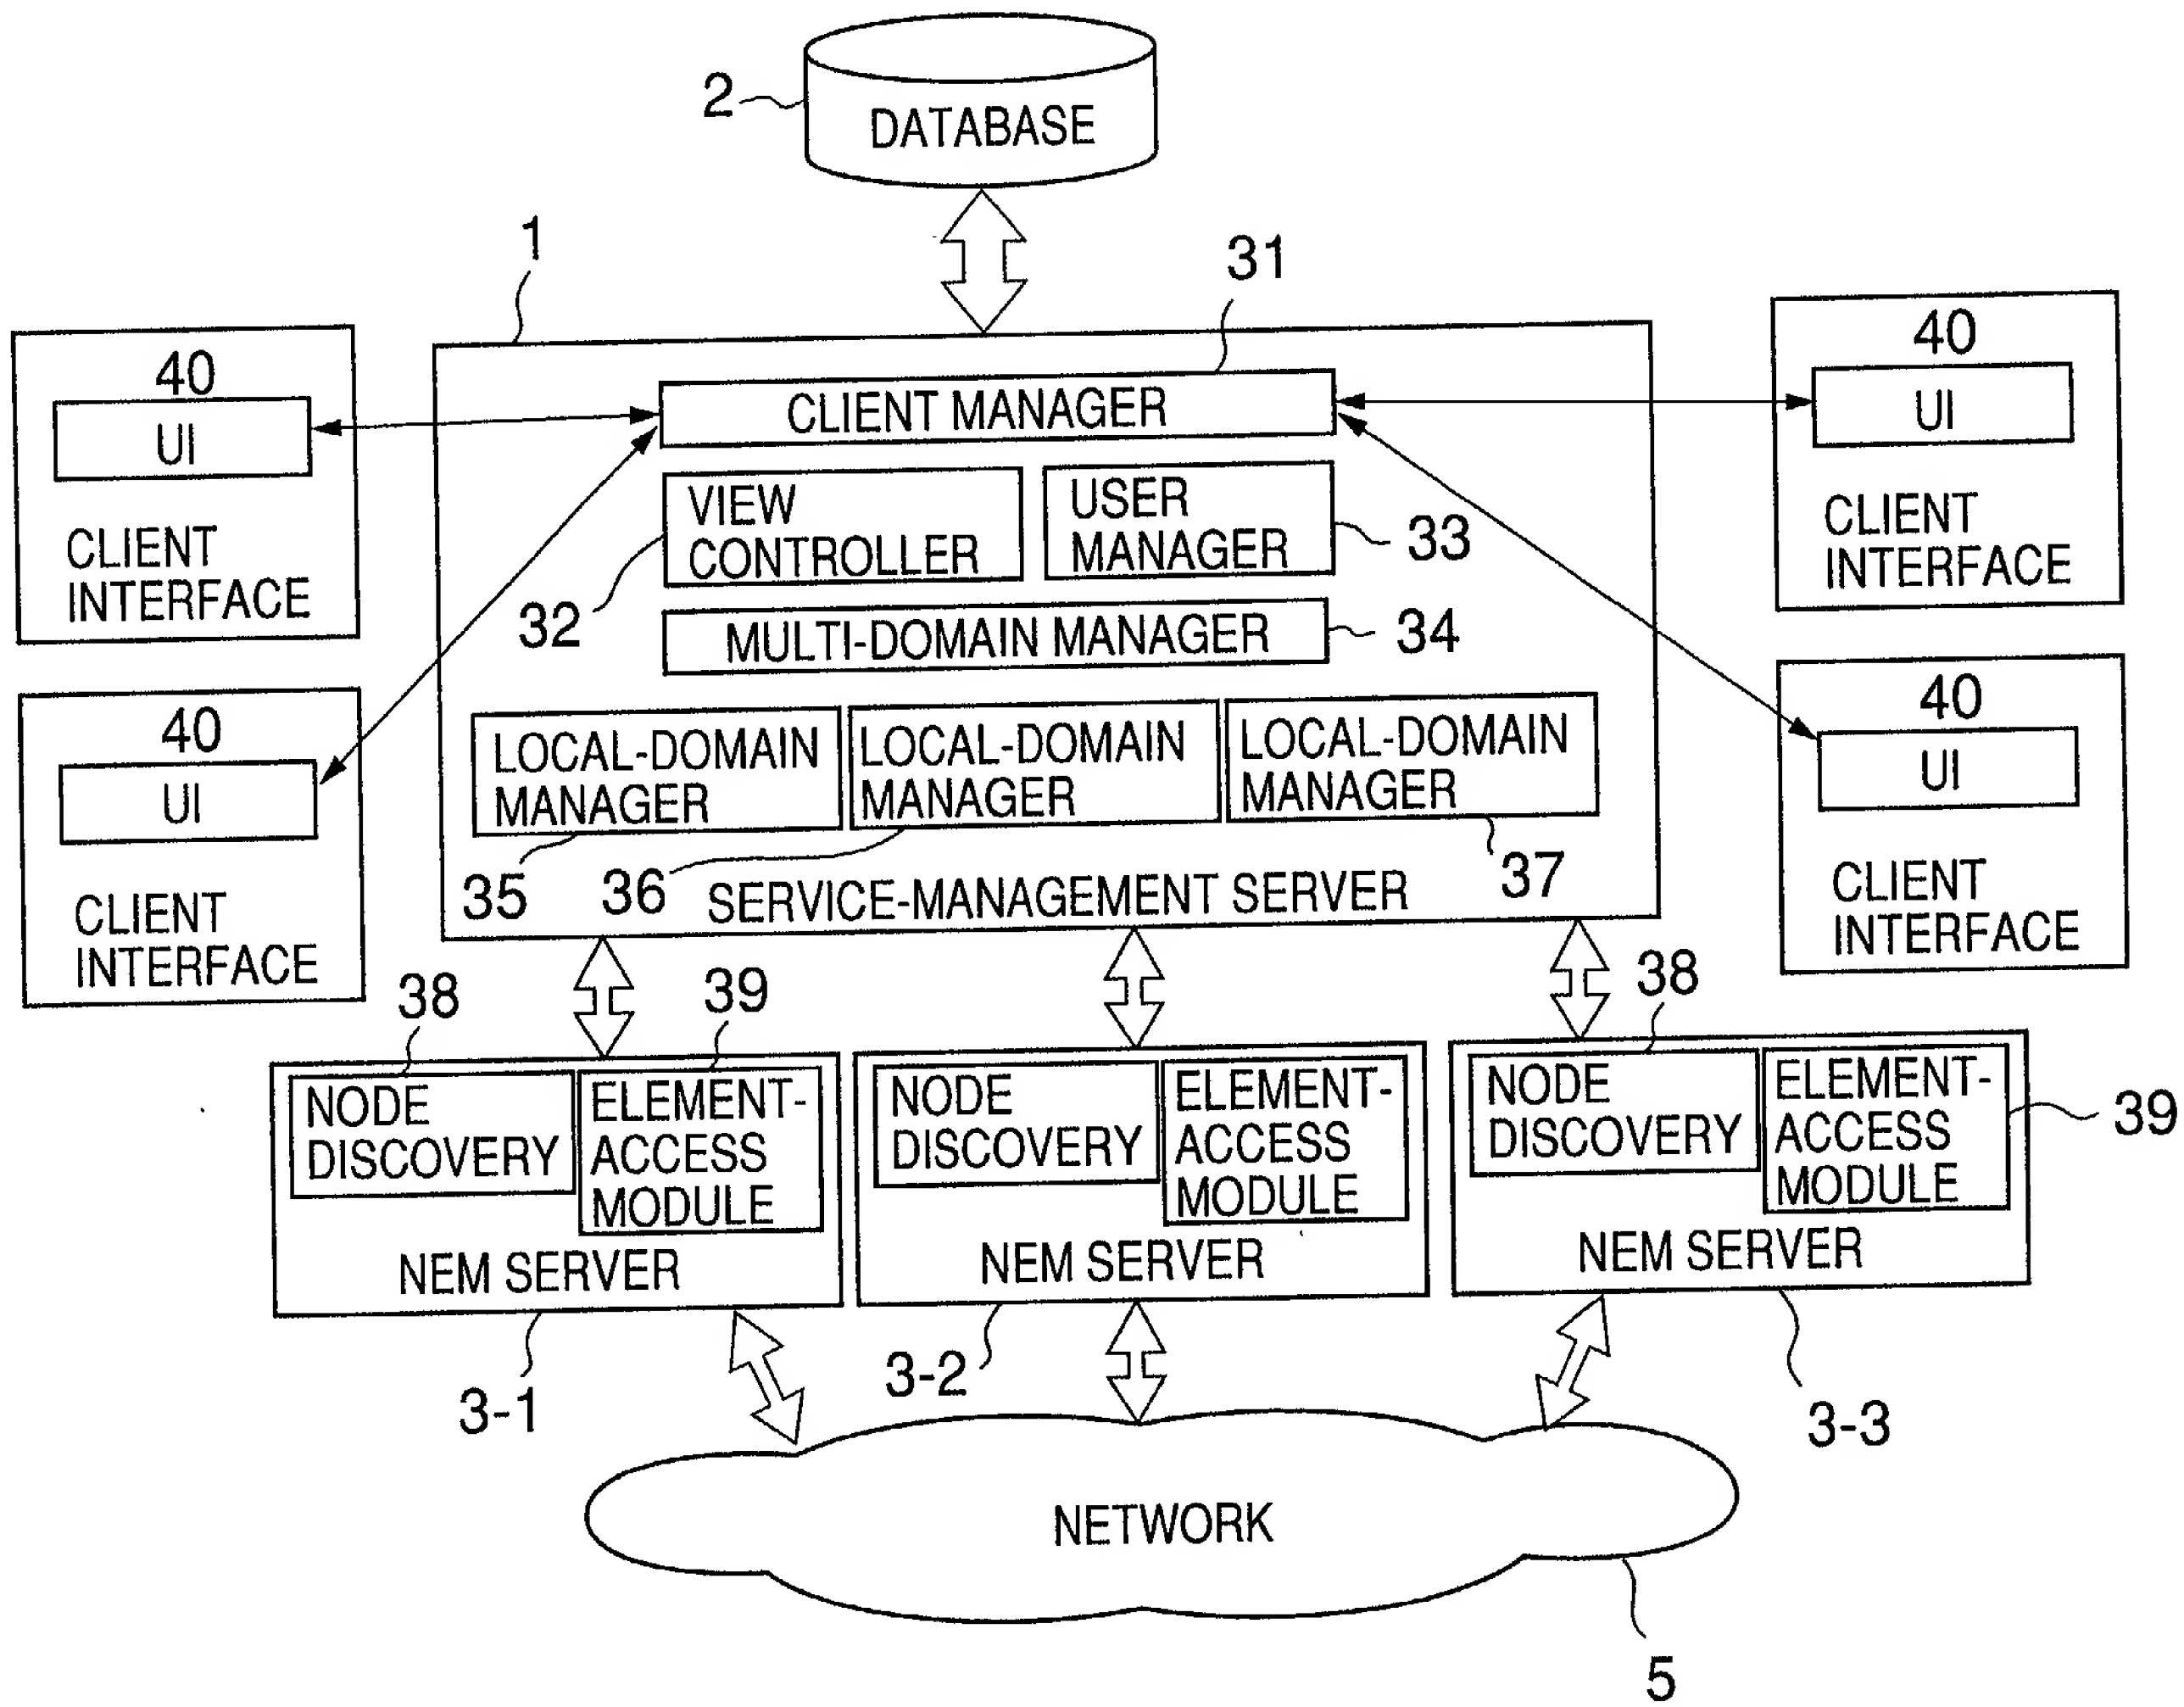
2
DATABASE
1
31
CLIENT MANAGER
VIEW CONTROLLER
32
USER MANAGER
33
MULTI-DOMAIN MANAGER
34
LOCAL-DOMAIN MANAGER
LOCAL-DOMAIN MANAGER
LOCAL-DOMAIN MANAGER
35
36
SERVICE-MANAGEMENT SERVER
37
40
UI
CLIENT INTERFACE
40
UI
CLIENT INTERFACE
40
UI
CLIENT INTERFACE
40
UI
CLIENT INTERFACE
38
39
NODE DISCOVERY
ELEMENT-ACCESS MODULE
NEM SERVER
3-1
NODE DISCOVERY
ELEMENT-ACCESS MODULE
NEM SERVER
3-2
38
NODE DISCOVERY
ELEMENT-ACCESS MODULE
39
NEM SERVER
3-3
NETWORK
5

FIG.5

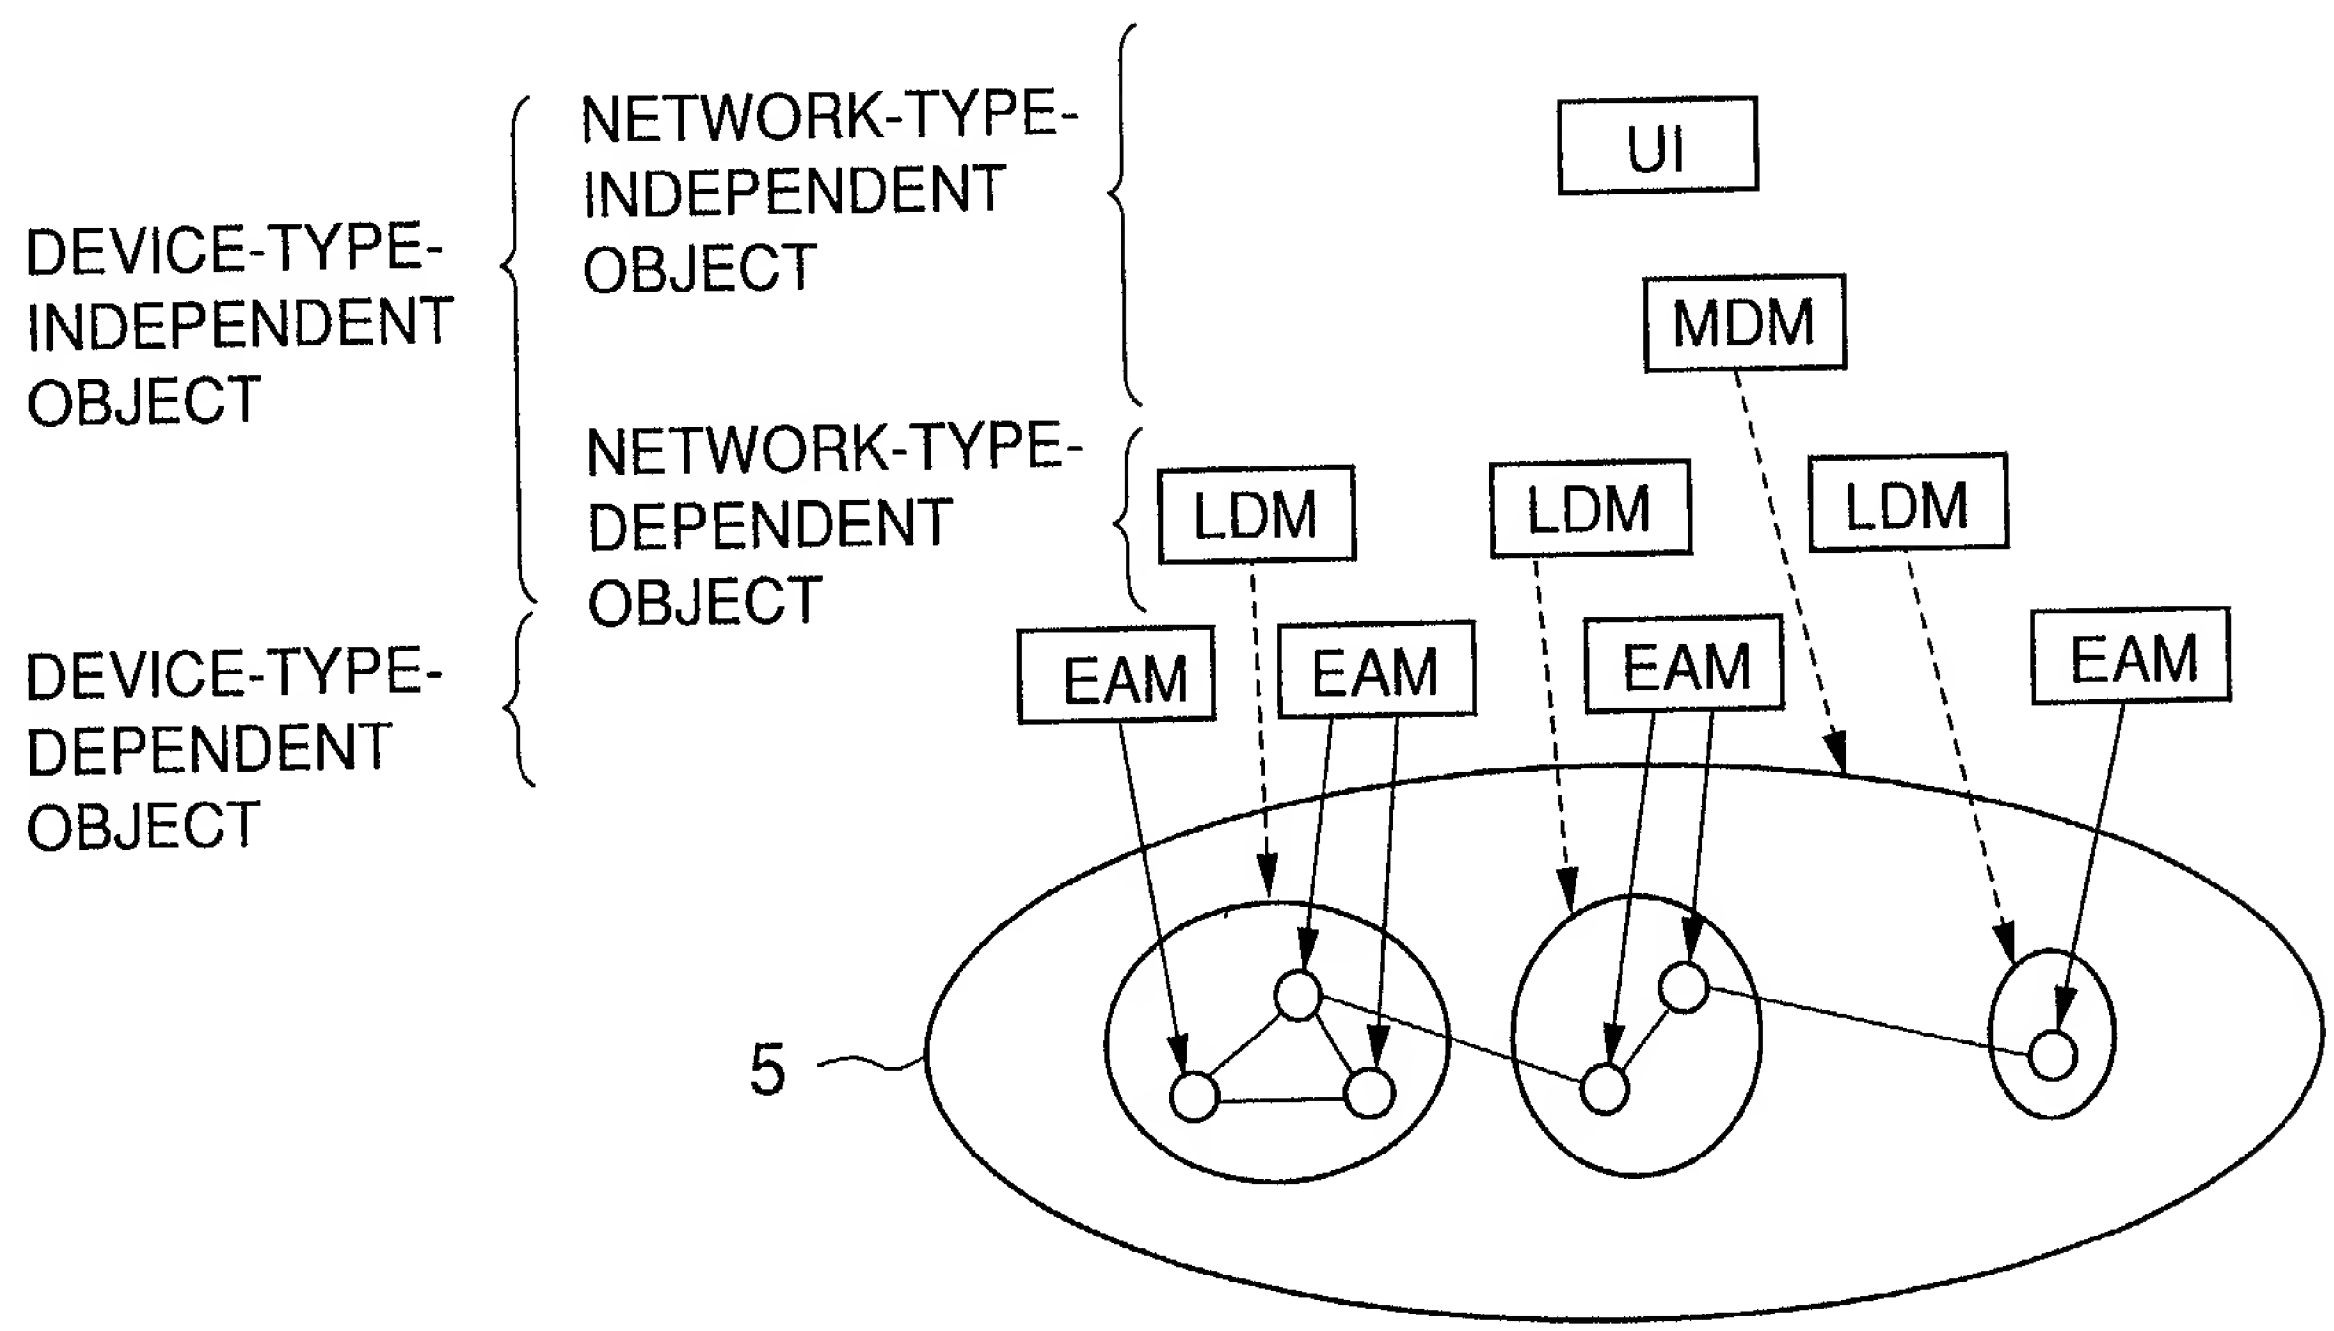
DEVICE-TYPE-INDEPENDENT OBJECT
DEVICE-TYPE-DEPENDENT OBJECT
NETWORK-TYPE-INDEPENDENT OBJECT
NETWORK-TYPE-DEPENDENT OBJECT
UI
MDM
LDM
LDM
LDM
EAM
EAM
EAM
EAM
5

FIG.6

DATABASE ITEM	INFORMATION TO BE COLLECTED FROM NETWORK ELEMENT	CONVERSION METHOD
NETWORK CONFIGURATION	DETECTING NETWORK ELEMENT	MANUAL ENTRY OF DATA INTO DATABASE (ADDING/DELETING LINK,DELETING NODE)
NODE STATUS	FAILURE OF NETWORK ELEMENT·RECOVERY	OBTAINING NODE-FAILURE LEVEL VIA ELEMENT-ACCESS MODULE PROVIDING MATCHES BETWEEN FAILURE CODES AND FAILURE LEVEL,AND UPDATING DATABASE IF THERE IS CHANGE IN NODE-FAILURE LEVEL
LINK STATUS	FAILURE OF NETWORK-ELEMENT PORT·RECOVERY	OBTAINING LINK -FAILURE LEVEL VIA LOCAL-DOMAIN MANAGER/MULTI-DOMAIN MANAGER PROVIDING MATCHES BETWEEN PORT-RELATED FAILURE CODES AND LINK-FAILURE LEVEL,AND UPDATING DATABASE IF THERE IS CHANGE IN LINK-FAILURE LEVEL
CONNECTION ROUTE	CROSS CONNECT	CONNECTING CROSS-CONNECTS TOGETHER. CORRECTING ROUTE INFORMATION IF THERE IS CHANGE IN CROSS CONNECT. DELETING ENTRY FROM DATABASE WHEN NO CROSS CONNECT EXISTS ANY LONGER.
CONNECTION STATUS	FAILURE OF NETWORK ELEMENT AND PORT	EXTRACTING CONNECTION FROM ROUTE INFORMATION WHEN CONNECTION RELATES TO FAILURE

FIG.7

EVENT	TYPE OF MODIFICATION	COLLECTED ITEM	DESCRIPTION
NODE FAILURE	NODE-STATUS MODIFICATION LINK-STATUS MODIFICATION S-PVC-ROUTE MODIFICATION	NEW ROUTE OF S-PVC CONNECTION THAT HAD ROUTE PASSING THROUGH FAILED NODE/LINK	
RECOVERY FROM NODE FAILURE	NODE-STATUS MODIFICATION NODE-CONFIGURATION MODIFICATION LINK-STATUS MODIFICATION	NODE-CONFIGURATION INFORMATION AND ROUTE EXPECTED TO BE LAID OUT IN RESPONSE TO CHANGE IN NODE CONFIGURATION	
ADDING CONNECTION	ADDING CONNECTION	ROUTE OF ADDED CONNECTION	
MODIFYING CONNECTION	MODIFYING CONNECTION	ROUTE OF MODIFIED CONNECTION	
DELETING CONNECTION	DELETING CONNECTION	ROUTE OF DELETED CONNECTION	
USER REQUEST	ANY MODIFICATION	REQUESTED ITEM	

FIG.8

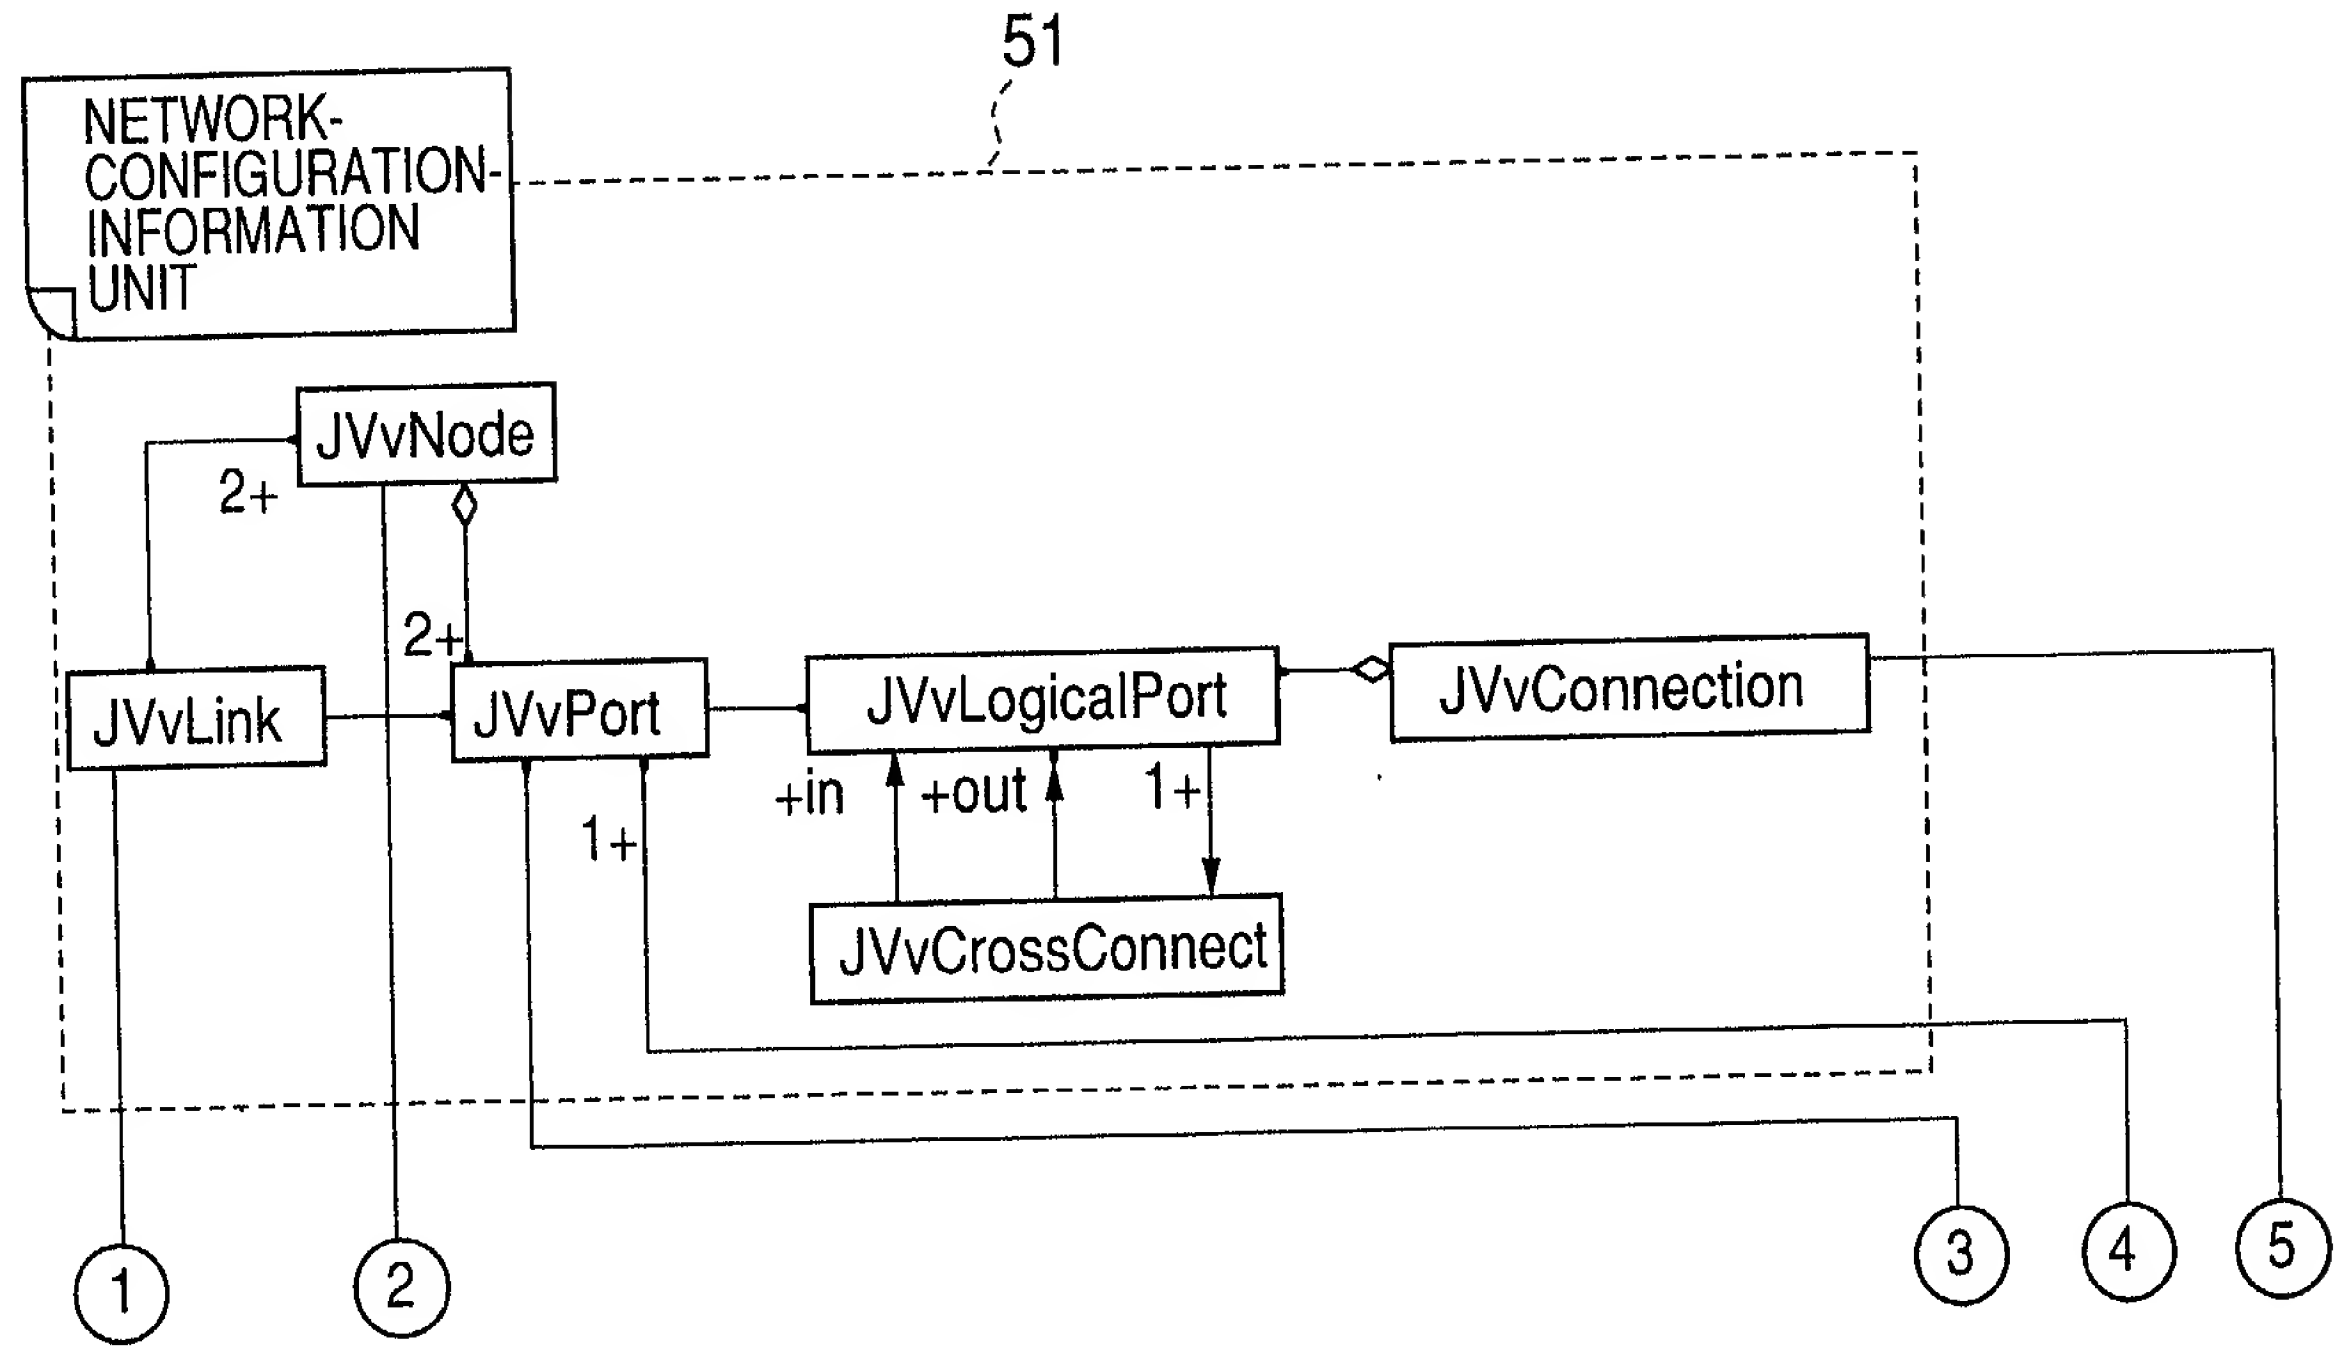
51
NETWORK-CONFIGURATION-INFORMATION UNIT
JVvNode
2+
2+
JVvLink
JVvPort
JVvLogicalPort
JVvConnection
+in
+out
1+
1+
JVvCrossConnect
1
2
3
4
5

FIG.9

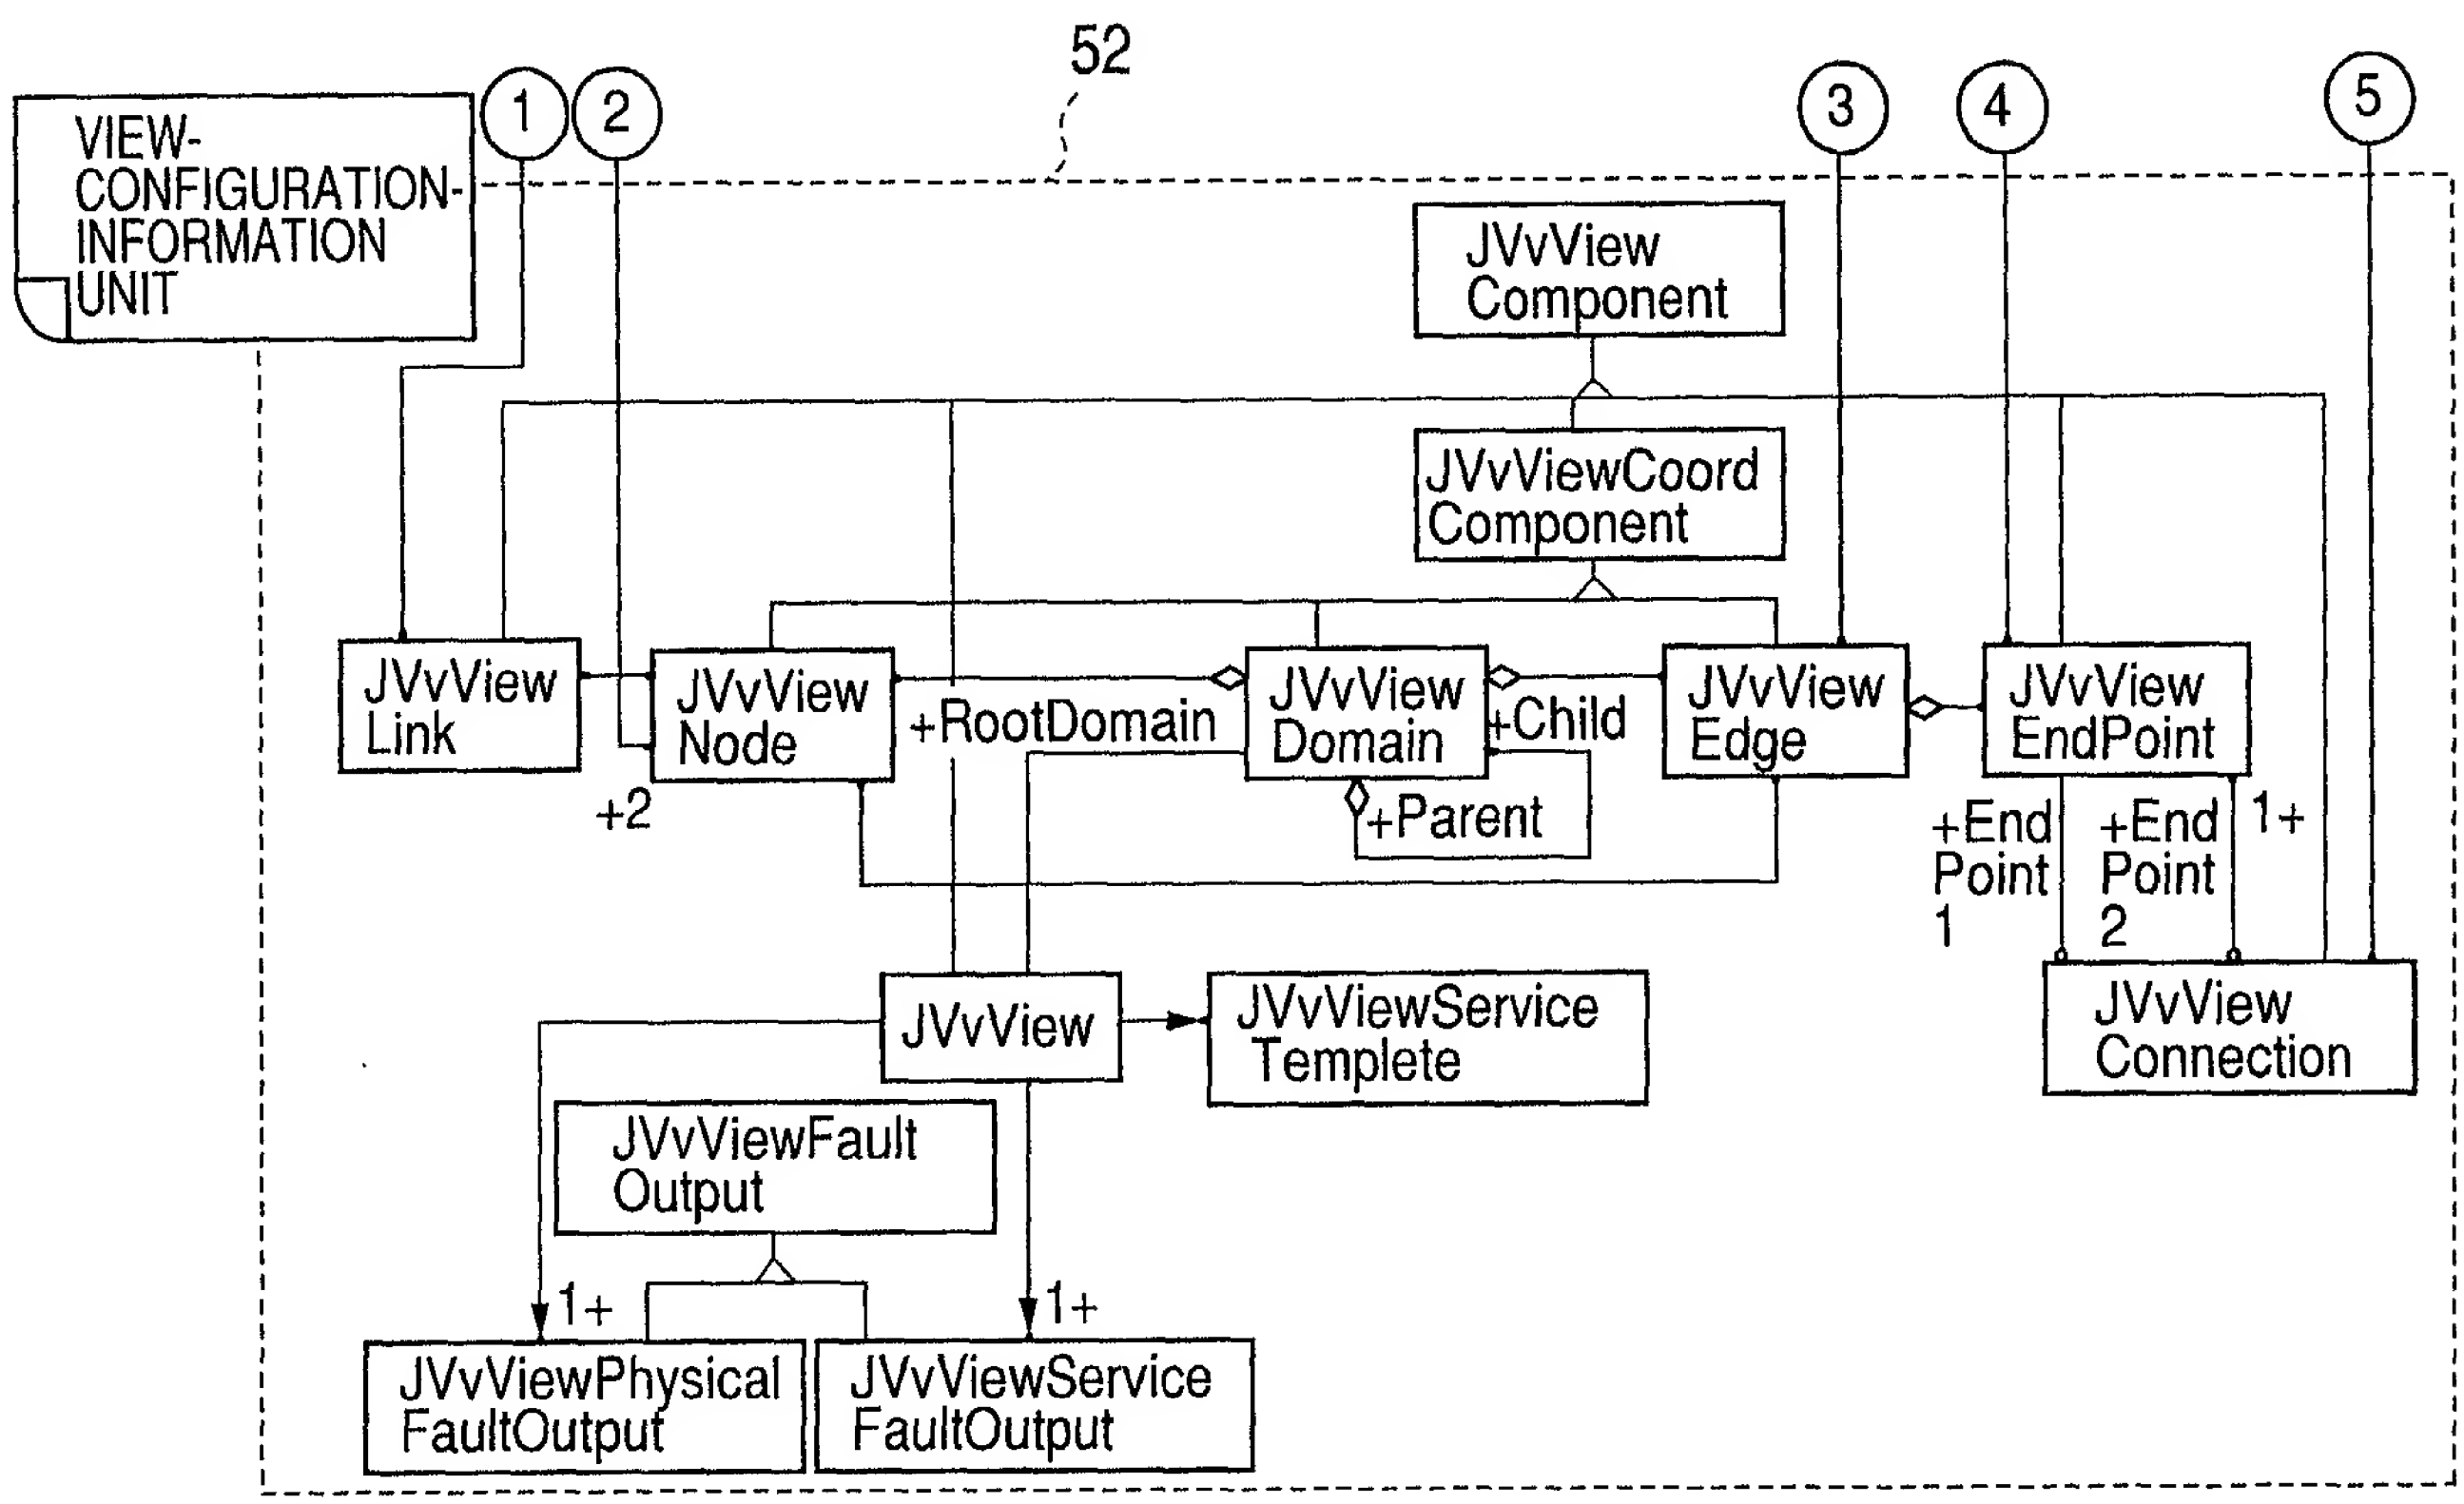
52
VIEW-CONFIGURATION-INFORMATION UNIT
1
2
3
4
5
JVvView Component
JVvViewCoord Component
JVvView Link
JVvView Node
+2
+RootDomain
JVvView Domain
+Child
+Parent
JVvView Edge
JVvView EndPoint
+End Point 1
+End Point 2
1+
JVvView Connection
JVvView
JVvViewService Templete
JVvViewFault Output
1+
1+
JVvViewPhysical FaultOutput
JVvViewService FaultOutput

FIG.10A

DATABASE-ITEM NAME	CONTENTS	DESCRIPTION
JVvNode	NODE	INFORMATION ON NETWORK ELEMENT
JVvLink	LINK	INFORMATION ON COMMUNICATION LINE
JVvPort	PORT	ATTRIBUTE INFORMATION ON END PORT OF COMMUNICATION LINE
JVvLogicalPort	LOGICAL PORT	ATTRIBUTE INFORMATION ON END POINTS OF CONNECTION
JVvConnection	CONNECTION	ATTRIBUTE INFORMATION ON END-TO-END CONNECTION
JVvCrossConnect	CROSS CONNECT	INFORMATION ON CONNECTION ROUTE AND DETAILED ATTRIBUTE

FIG.10B

DATABASE-ITEM NAME	CONTENTS	DESCRIPTION
JVvView	VIEW	INFORMATION FOR CONTROLLING EACH VIEW
JVvViewDomain	DOMAIN	UNIT OF CONTROL INTO WHICH VIEW IS DIVIDED
JVvViewNode	VIEW NODE	NODE REGISTERED AS VIEW-CONFIGURATION INFORMATION
JVvViewLink	VIEW LINK	LINK REGISTERED AS VIEW-CONFIGURATION INFORMATION
JVvViewEdge	EDGE	VIRTUAL DEVICE AT END OF NETWORK
JVvViewConnec-tion	VIEW CONNECTION	CONNECTION REGISTERED AS VIEW-CONFIGURATION INFORMATION
JVvViewEndPoint	END POINT	ENDPOINT OF CONNECTION BELONGING TO EDGE
JVvViewService Template	SERVICE TEMPLATE	SHARED INFORMATION ABOUT CONNECTION FOR EACH SERVICE
JVvViewPhysical FaultOutput	INFORMATION ON PHYSICAL FAIL OUTPUT	RULE ABOUT GUI DISPLAY OF PHYSICAL FAILURE
JVvViewService FaultOutput	INFORMATION ON SERVICE FAIL OUTPUT	RULE ABOUT GUI DISPLAY OF SERVICE FAILURE

FIG.11A

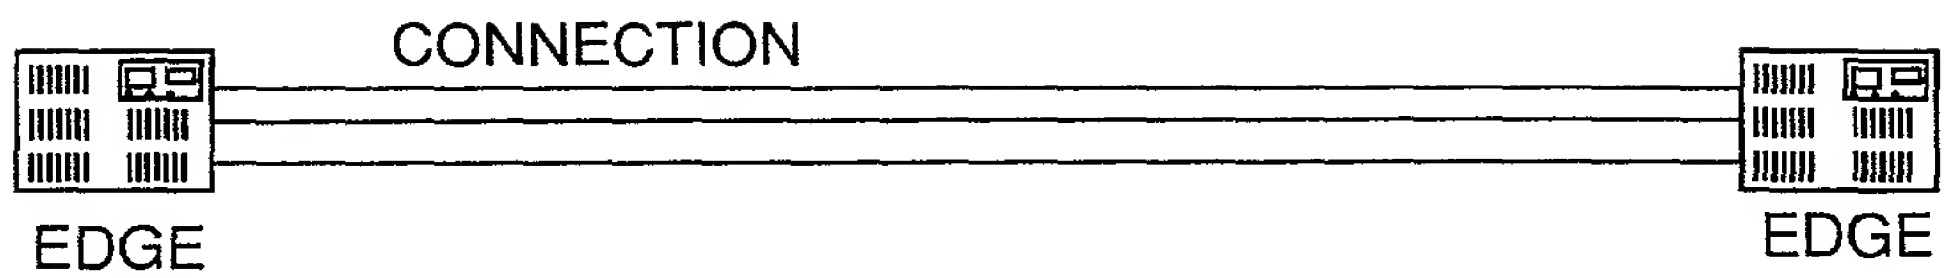

FIG.11B

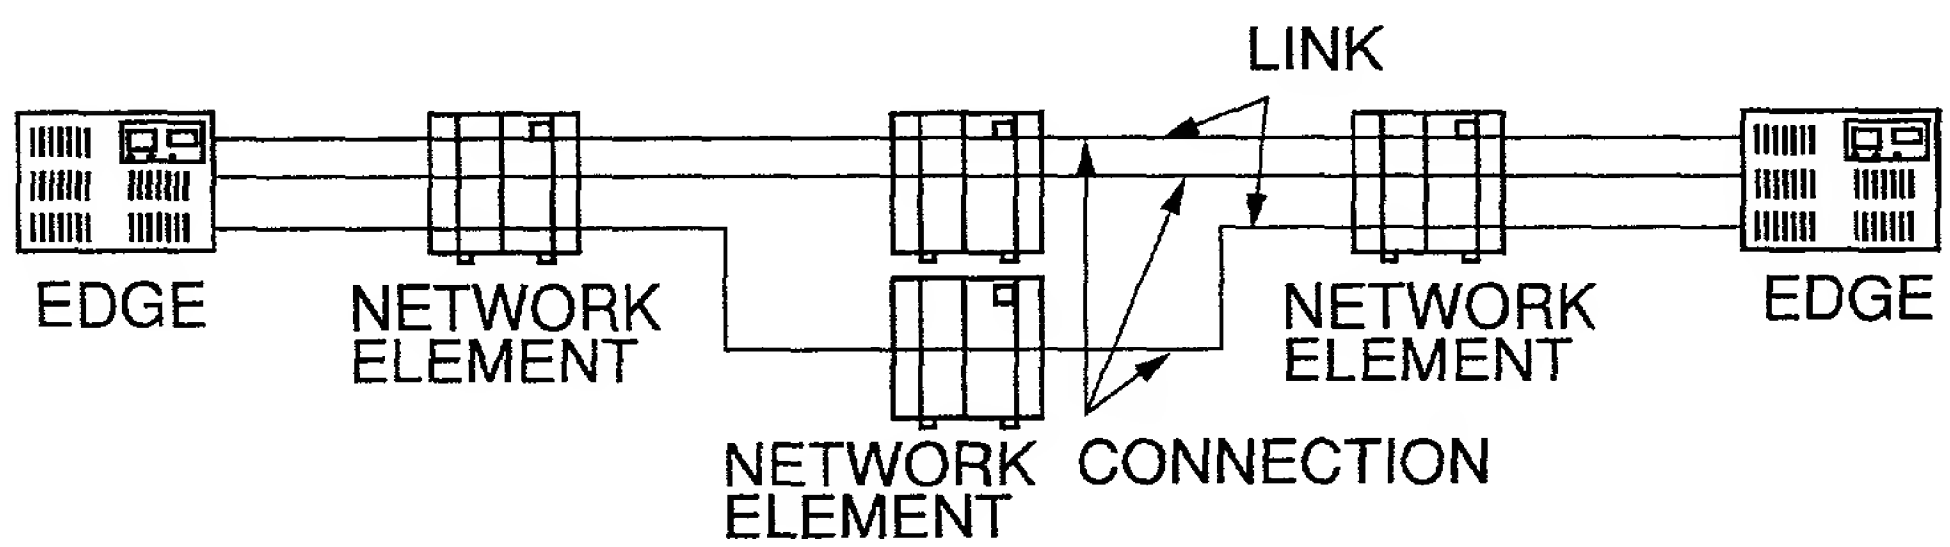

FIG.11C

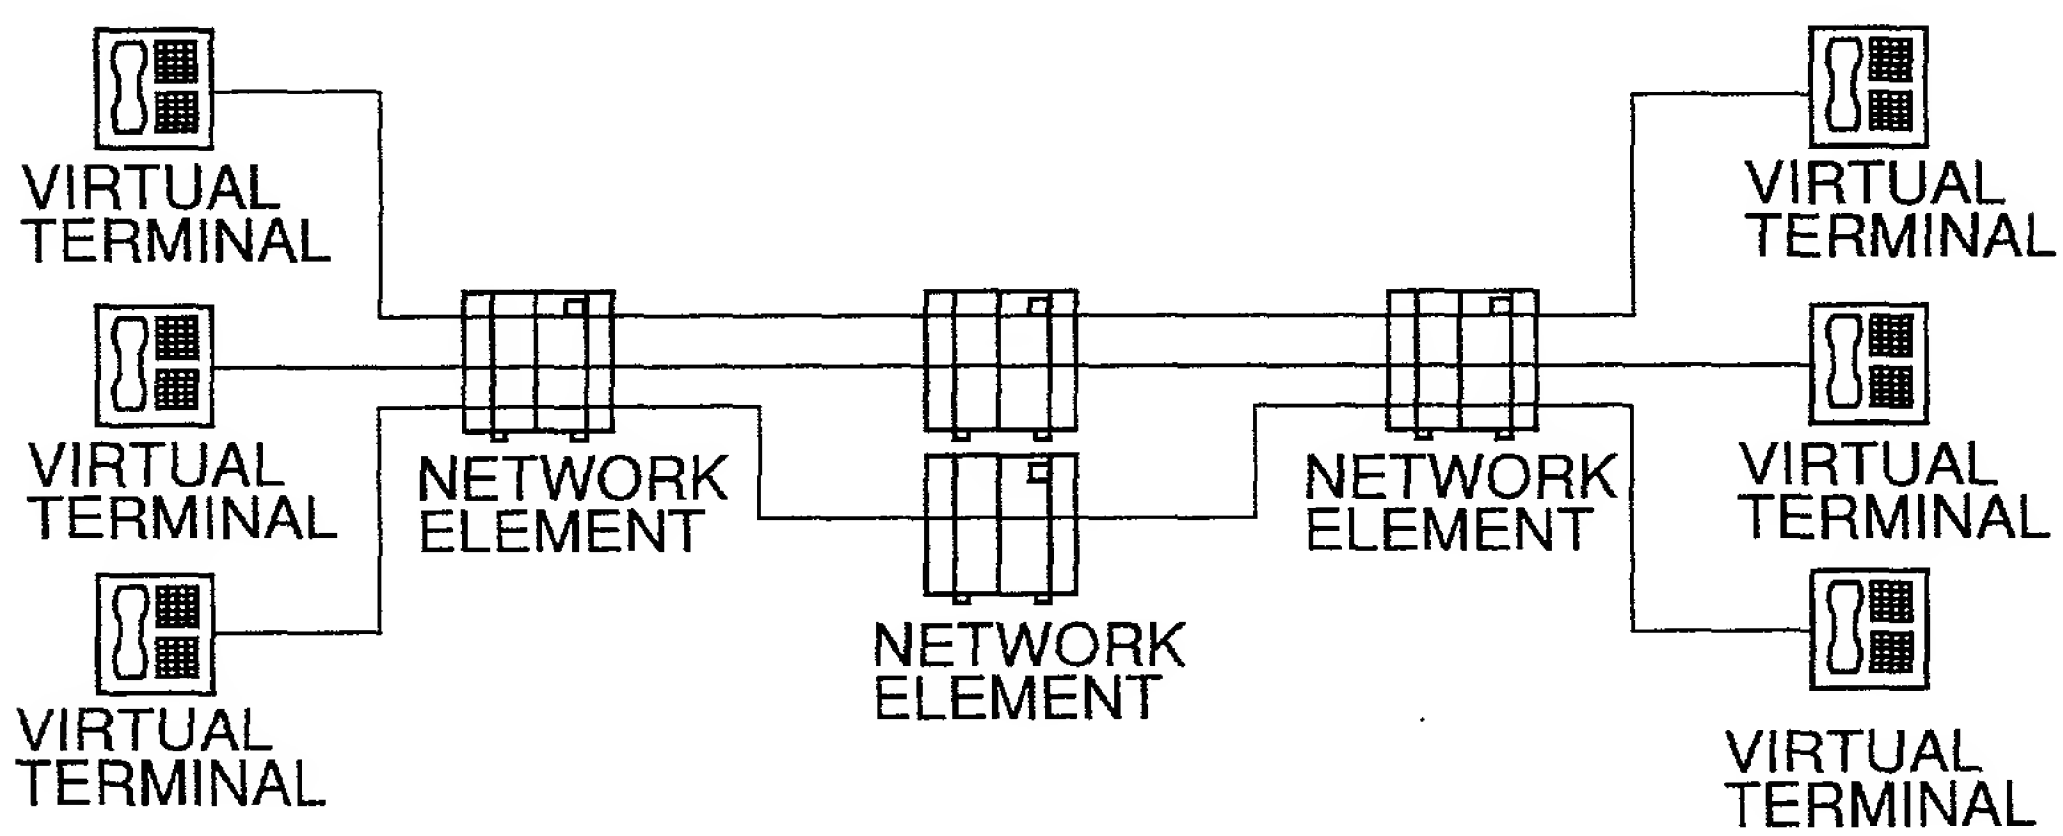

FIG.12A

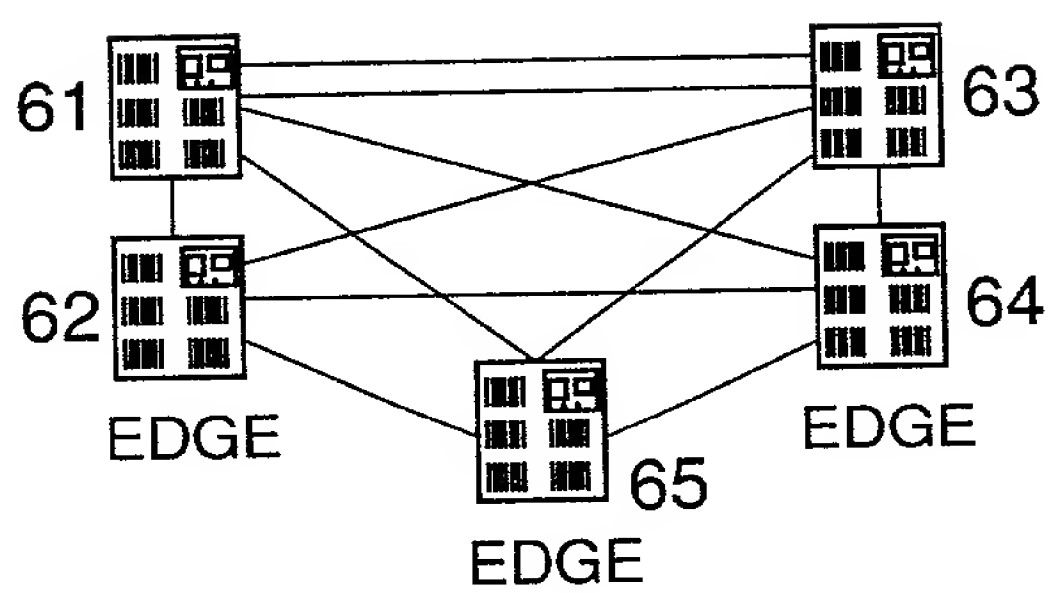

FIG.12B

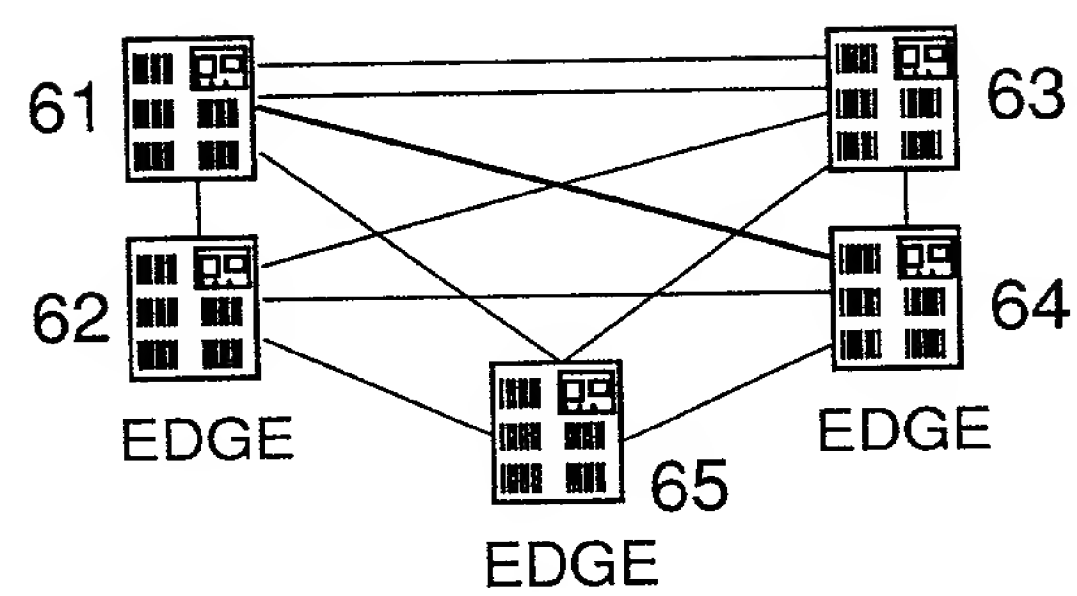

FIG.12C

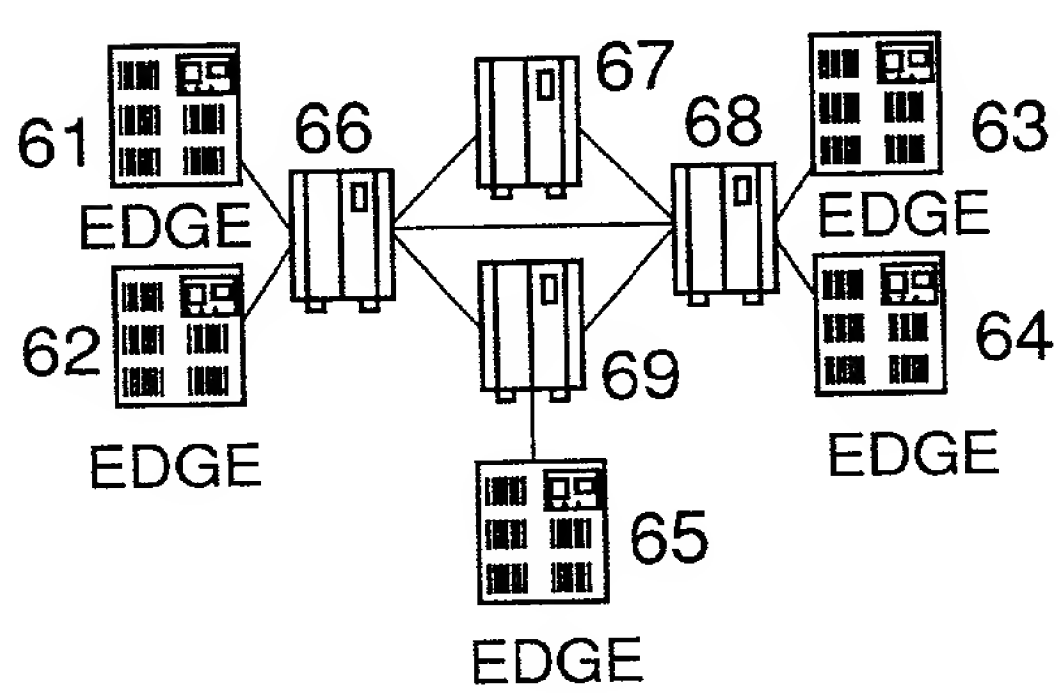

FIG.12D

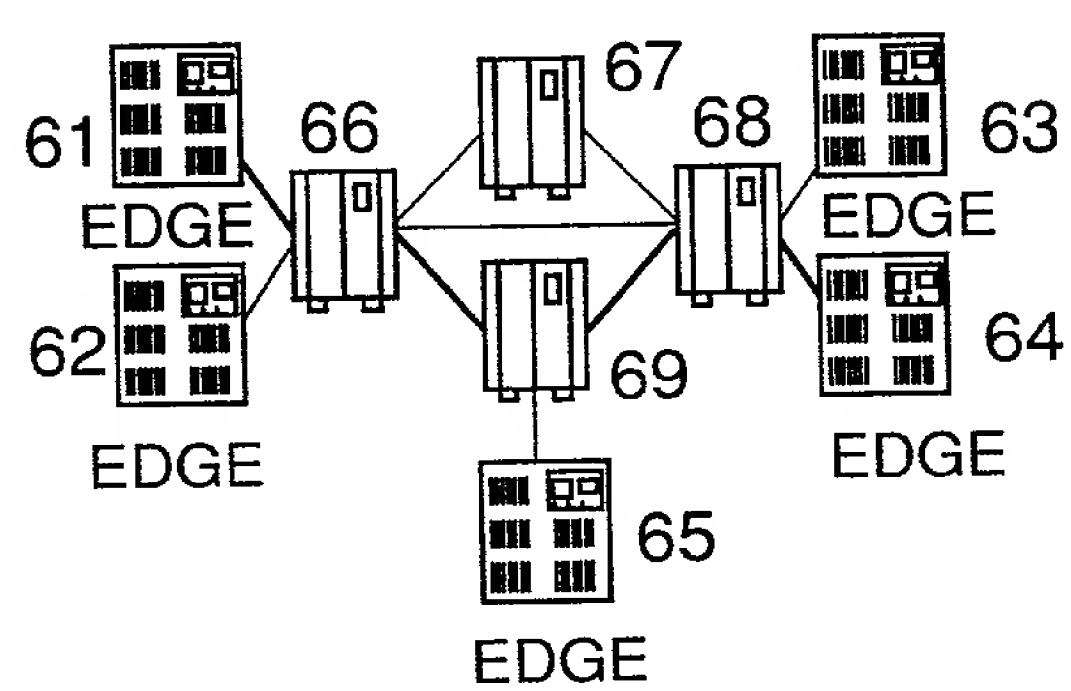

FIG.13

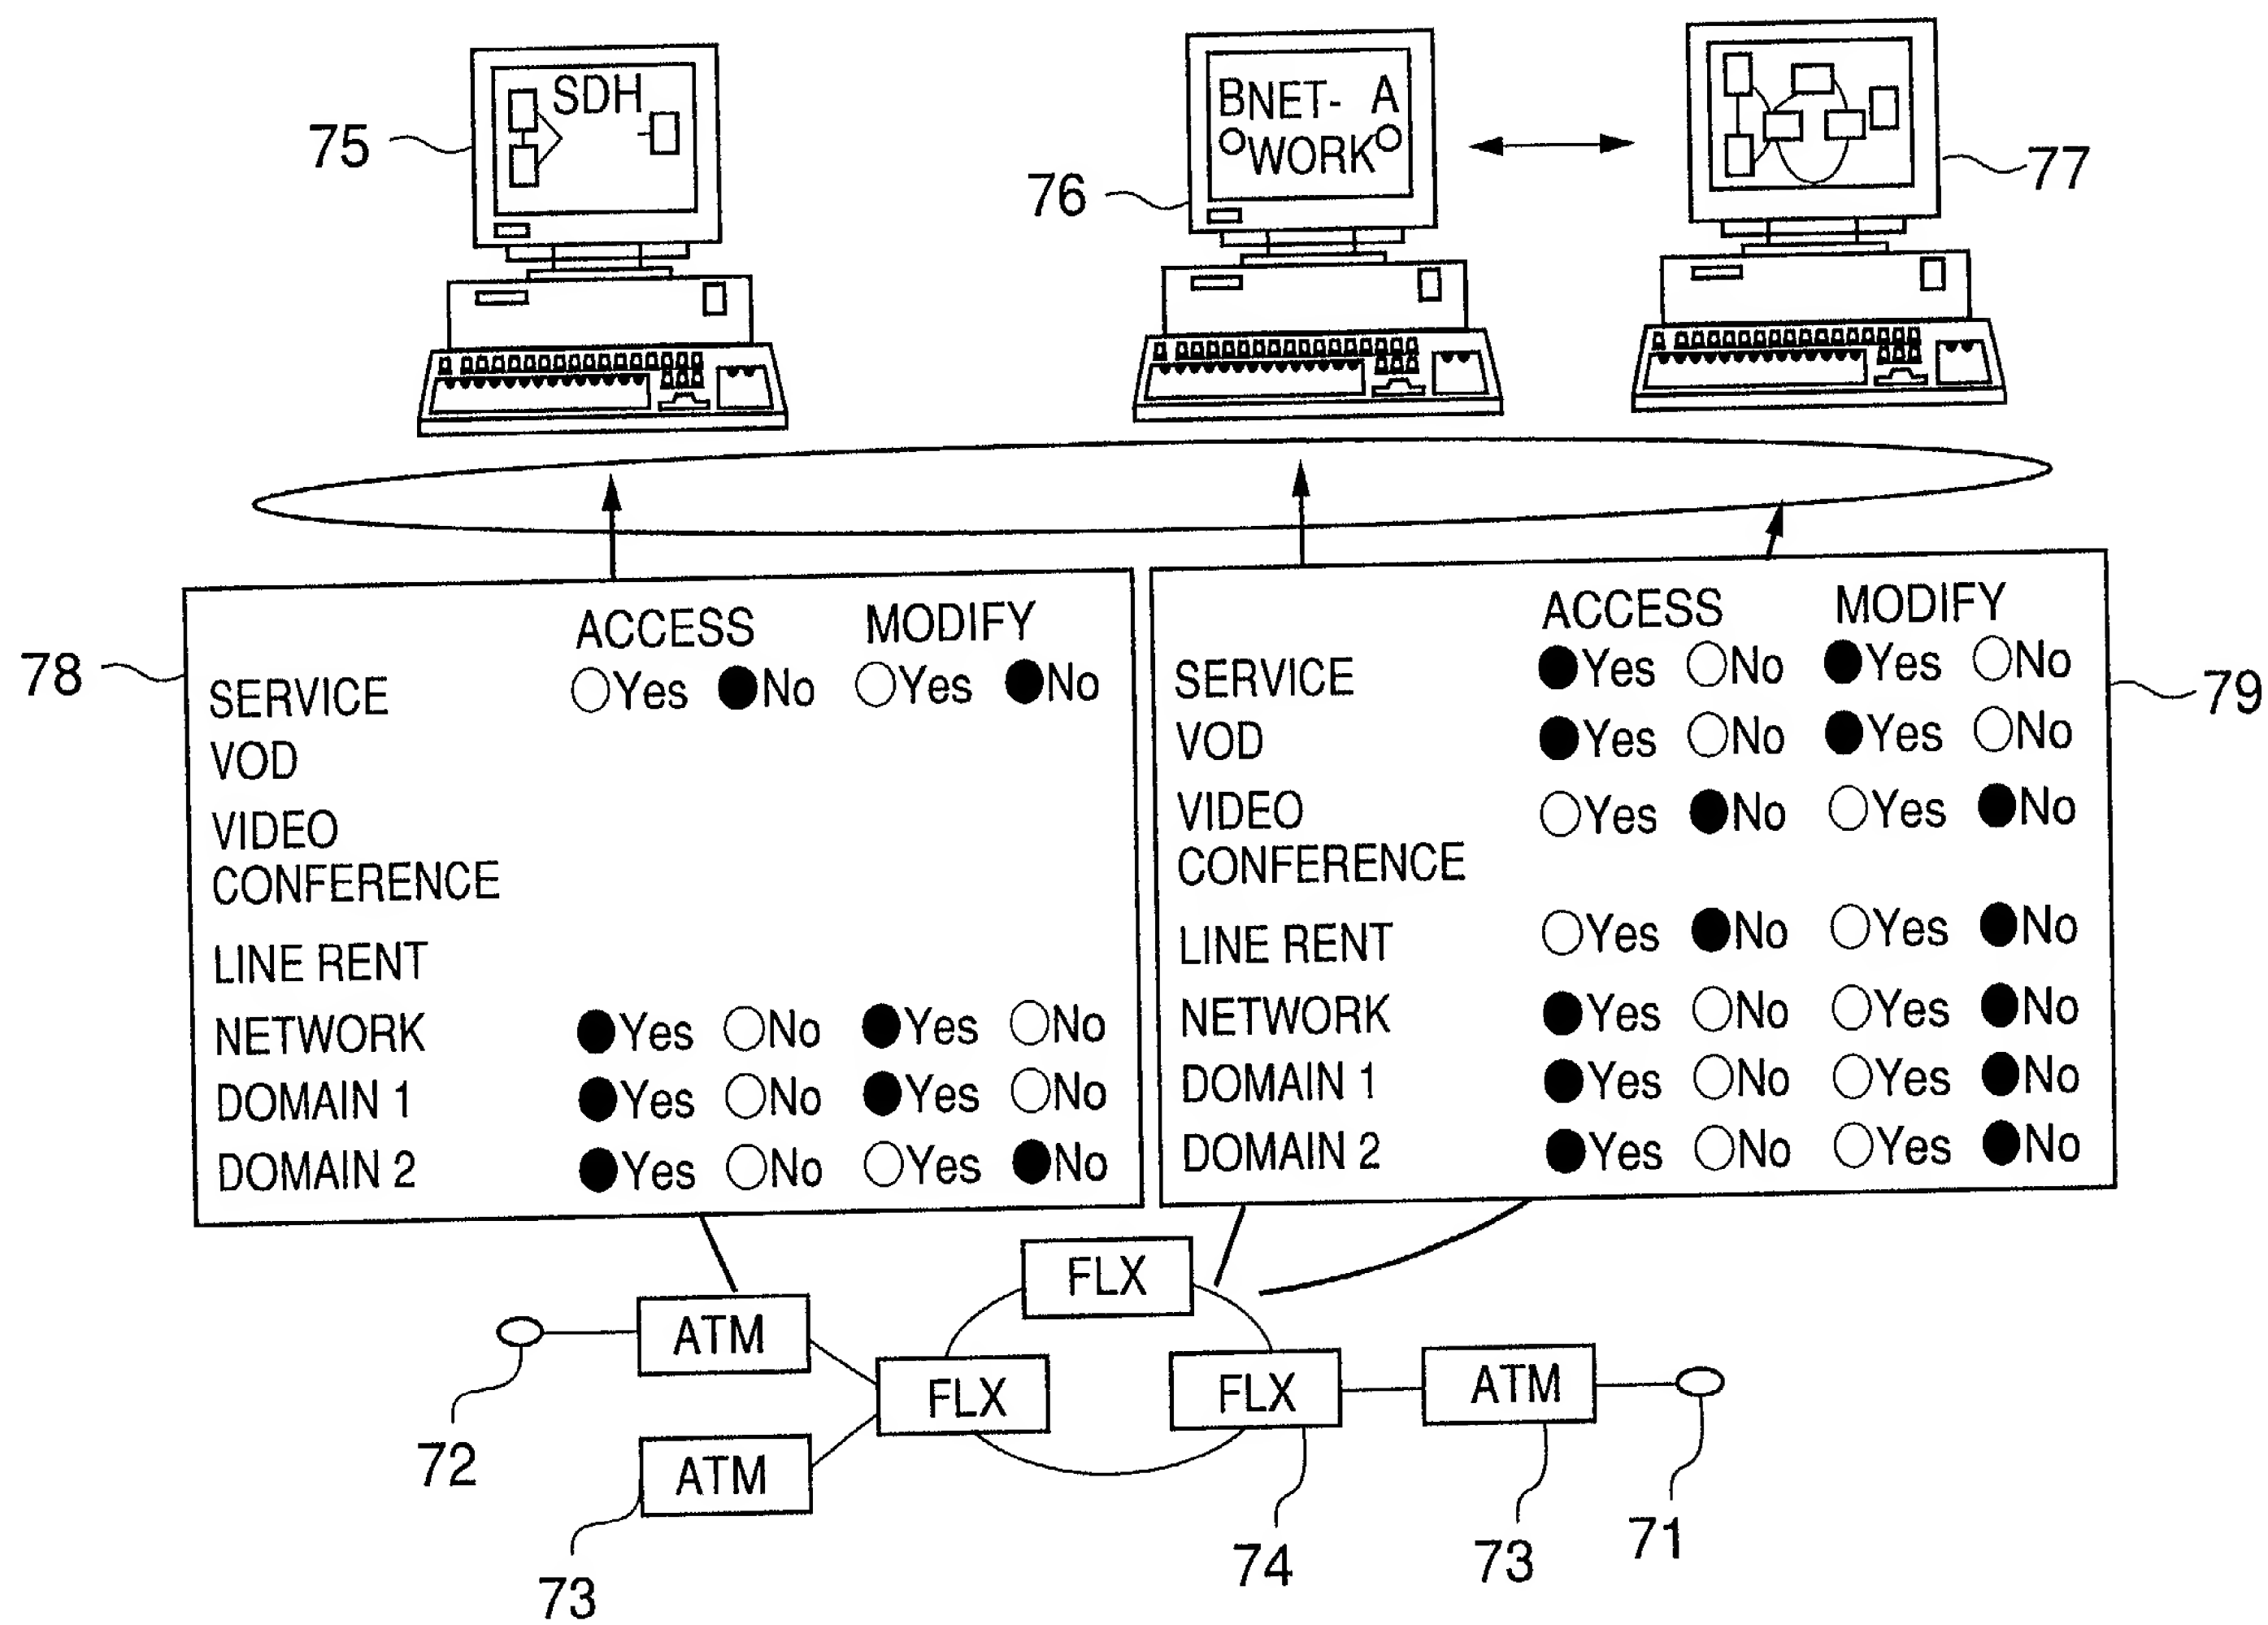

75
SDH
76
BNET- A
WORK
77
78
SERVICE
VOD
VIDEO CONFERENCE
LINE RENT
NETWORK
DOMAIN 1
DOMAIN 2
ACCESS
MODIFY
Yes
No
79
FLX
ATM
72
73
74
71

FIG.14

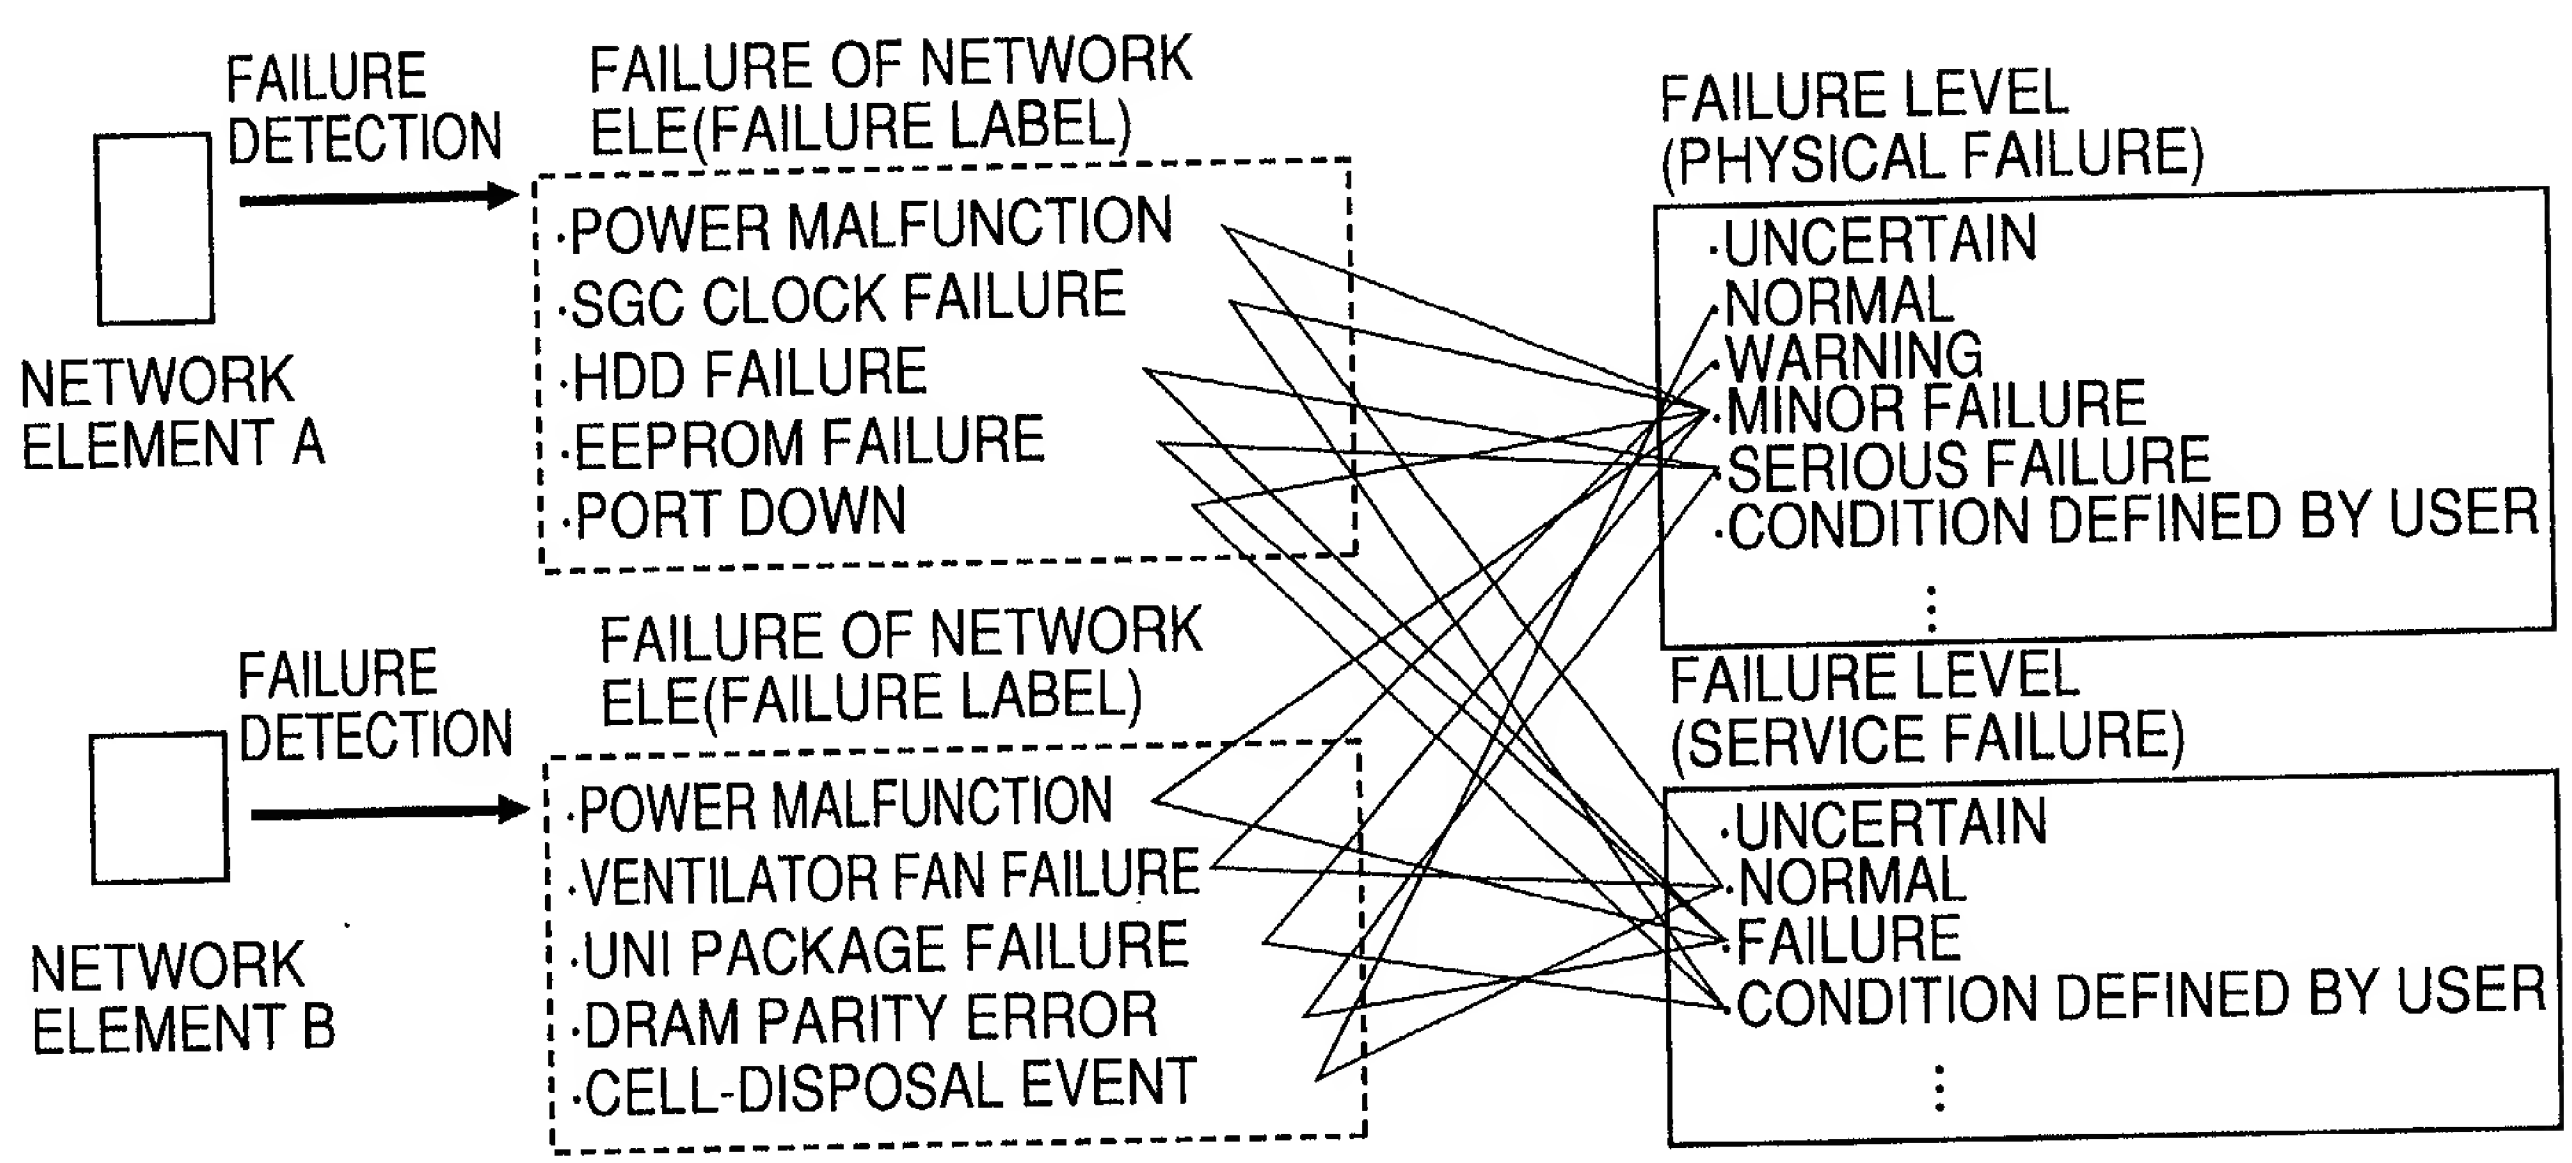
NETWORK ELEMENT A
FAILURE DETECTION
FAILURE OF NETWORK ELE(FAILURE LABEL)
·POWER MALFUNCTION
·SGC CLOCK FAILURE
·HDD FAILURE
·EEPROM FAILURE
·PORT DOWN
NETWORK ELEMENT B
FAILURE DETECTION
FAILURE OF NETWORK ELE(FAILURE LABEL)
·POWER MALFUNCTION
·VENTILATOR FAN FAILURE
·UNI PACKAGE FAILURE
·DRAM PARITY ERROR
·CELL-DISPOSAL EVENT
FAILURE LEVEL (PHYSICAL FAILURE)
·UNCERTAIN
·NORMAL
·WARNING
·MINOR FAILURE
·SERIOUS FAILURE
·CONDITION DEFINED BY USER
⋮
FAILURE LEVEL (SERVICE FAILURE)
·UNCERTAIN
·NORMAL
·FAILURE
·CONDITION DEFINED BY USER
⋮

FIG.15A

FAILURE LEVEL	FAILURE NAME	ICON NAME	ALARM-SOUND ID
-1	UNCERTAIN	GRAY	0
0	NORMAL	GREEN	0
1	WARNING	YELLOW	1
2	MINOR FAILURE	ORANGE	2
3	SERIOUS FAILURE	RED	3

FIG.15B

FAILURE LEVEL	FAILURE NAME	ICON NAME	ALARM-SOUND ID
-1	UNCERTAIN	GRAY	0
0	NORMAL	GREEN	0
1	FAILURE	RED	1

FIG.16

FAILURE LABEL	PHYSICAL FAILURE LEVEL	SERVICE FAILURE LEVEL
RECOVERY FROM CLOCK FAILURE	0	0
CLOCK FAILURE	3	1
RECOVERY FROM POWER FAILURE	0	0
POWER FAILURE	3	1
RECOVERY FROM UPS FAILURE	0	0
UPS FAILURE	3	1
RECOVERY FROM FAN FAILURE	0	0
FAN FAILURE	2	0
RECOVERY FROM HARD-DRIVE FAILURE	0	0
HARD-DRIVE FAILURE	3	1
RECOVERY FROM RTC FAILURE	0	0
RTC FAILURE	3	1
RECOVERY FROM TEMPERATUR FAILURE	0	0
TEMPERATUR FAILURE	2	0
RECOVERY FROM EEPROM FAILURE	0	0
EEPROM FAILURE	3	1
RECOVERY FROM STANDBY FAILURE	0	0
STANDBY FAILURE	2	0
RECOVERY FROM Sbus FAILURE	0	0
Sbus FAILURE	3	1
RECOVERY FROM Sbus FAILURE	0	0
Sbus FAILURE	3	1
RECOVERY FROM PORT FAILURE	0	0
PORT FAILURE	3	1

FIG.17

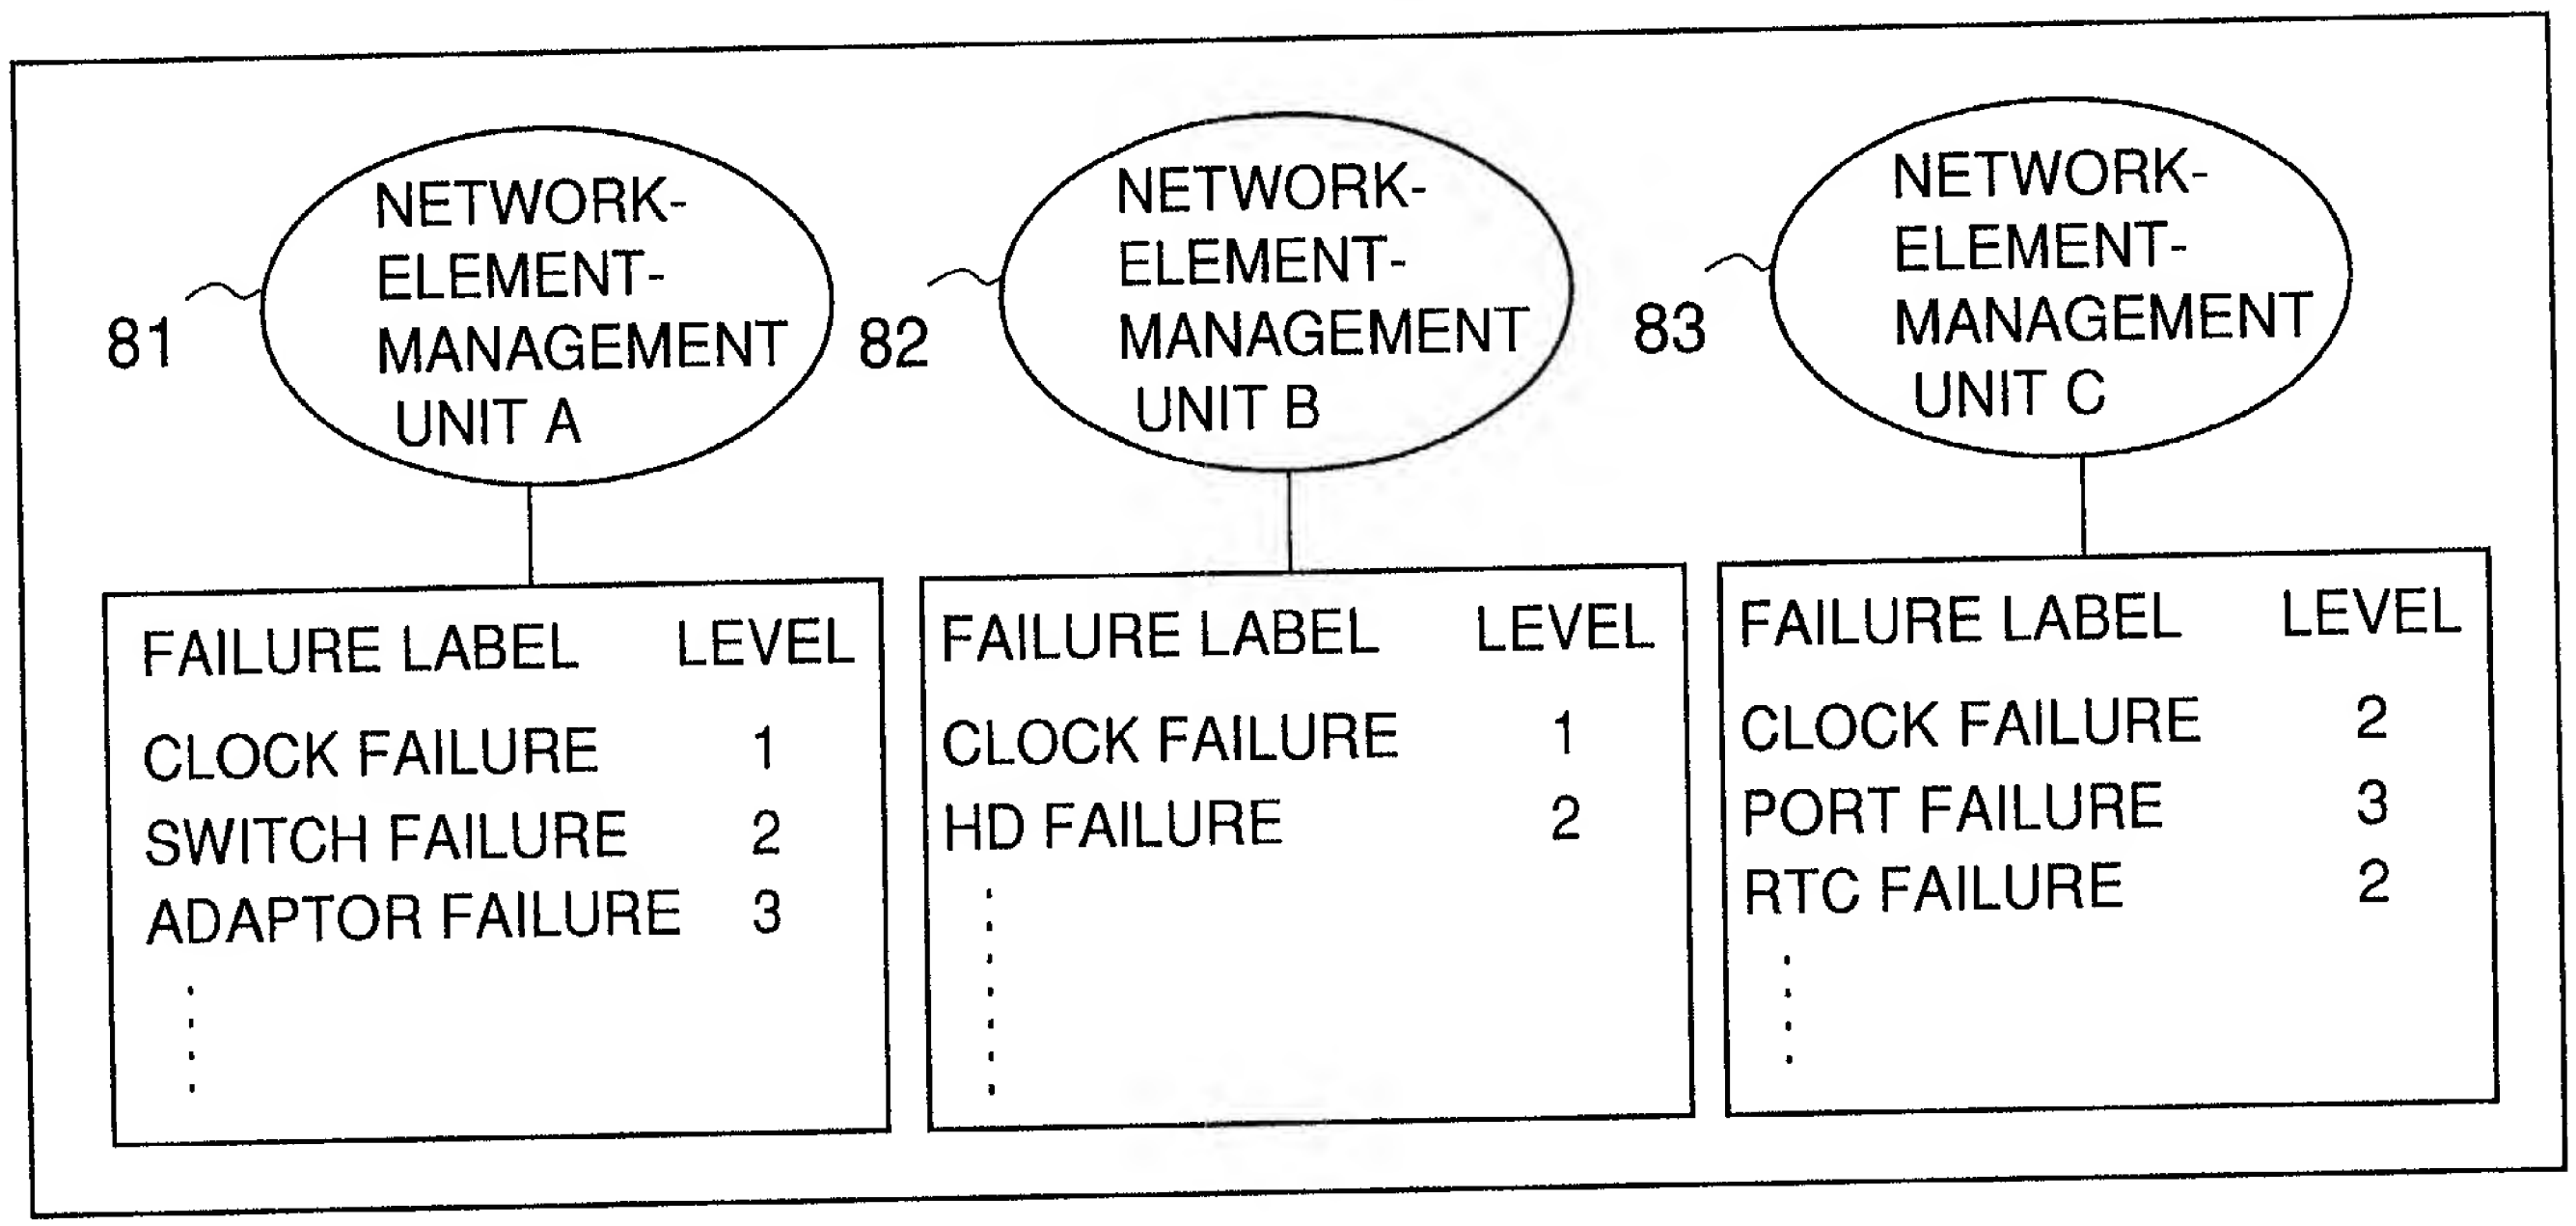

81
NETWORK-ELEMENT-MANAGEMENT UNIT A
FAILURE LABEL LEVEL
CLOCK FAILURE 1
SWITCH FAILURE 2
ADAPTOR FAILURE 3
82
NETWORK-ELEMENT-MANAGEMENT UNIT B
FAILURE LABEL LEVEL
CLOCK FAILURE 1
HD FAILURE 2
83
NETWORK-ELEMENT-MANAGEMENT UNIT C
FAILURE LABEL LEVEL
CLOCK FAILURE 2
PORT FAILURE 3
RTC FAILURE 2

FIG.18

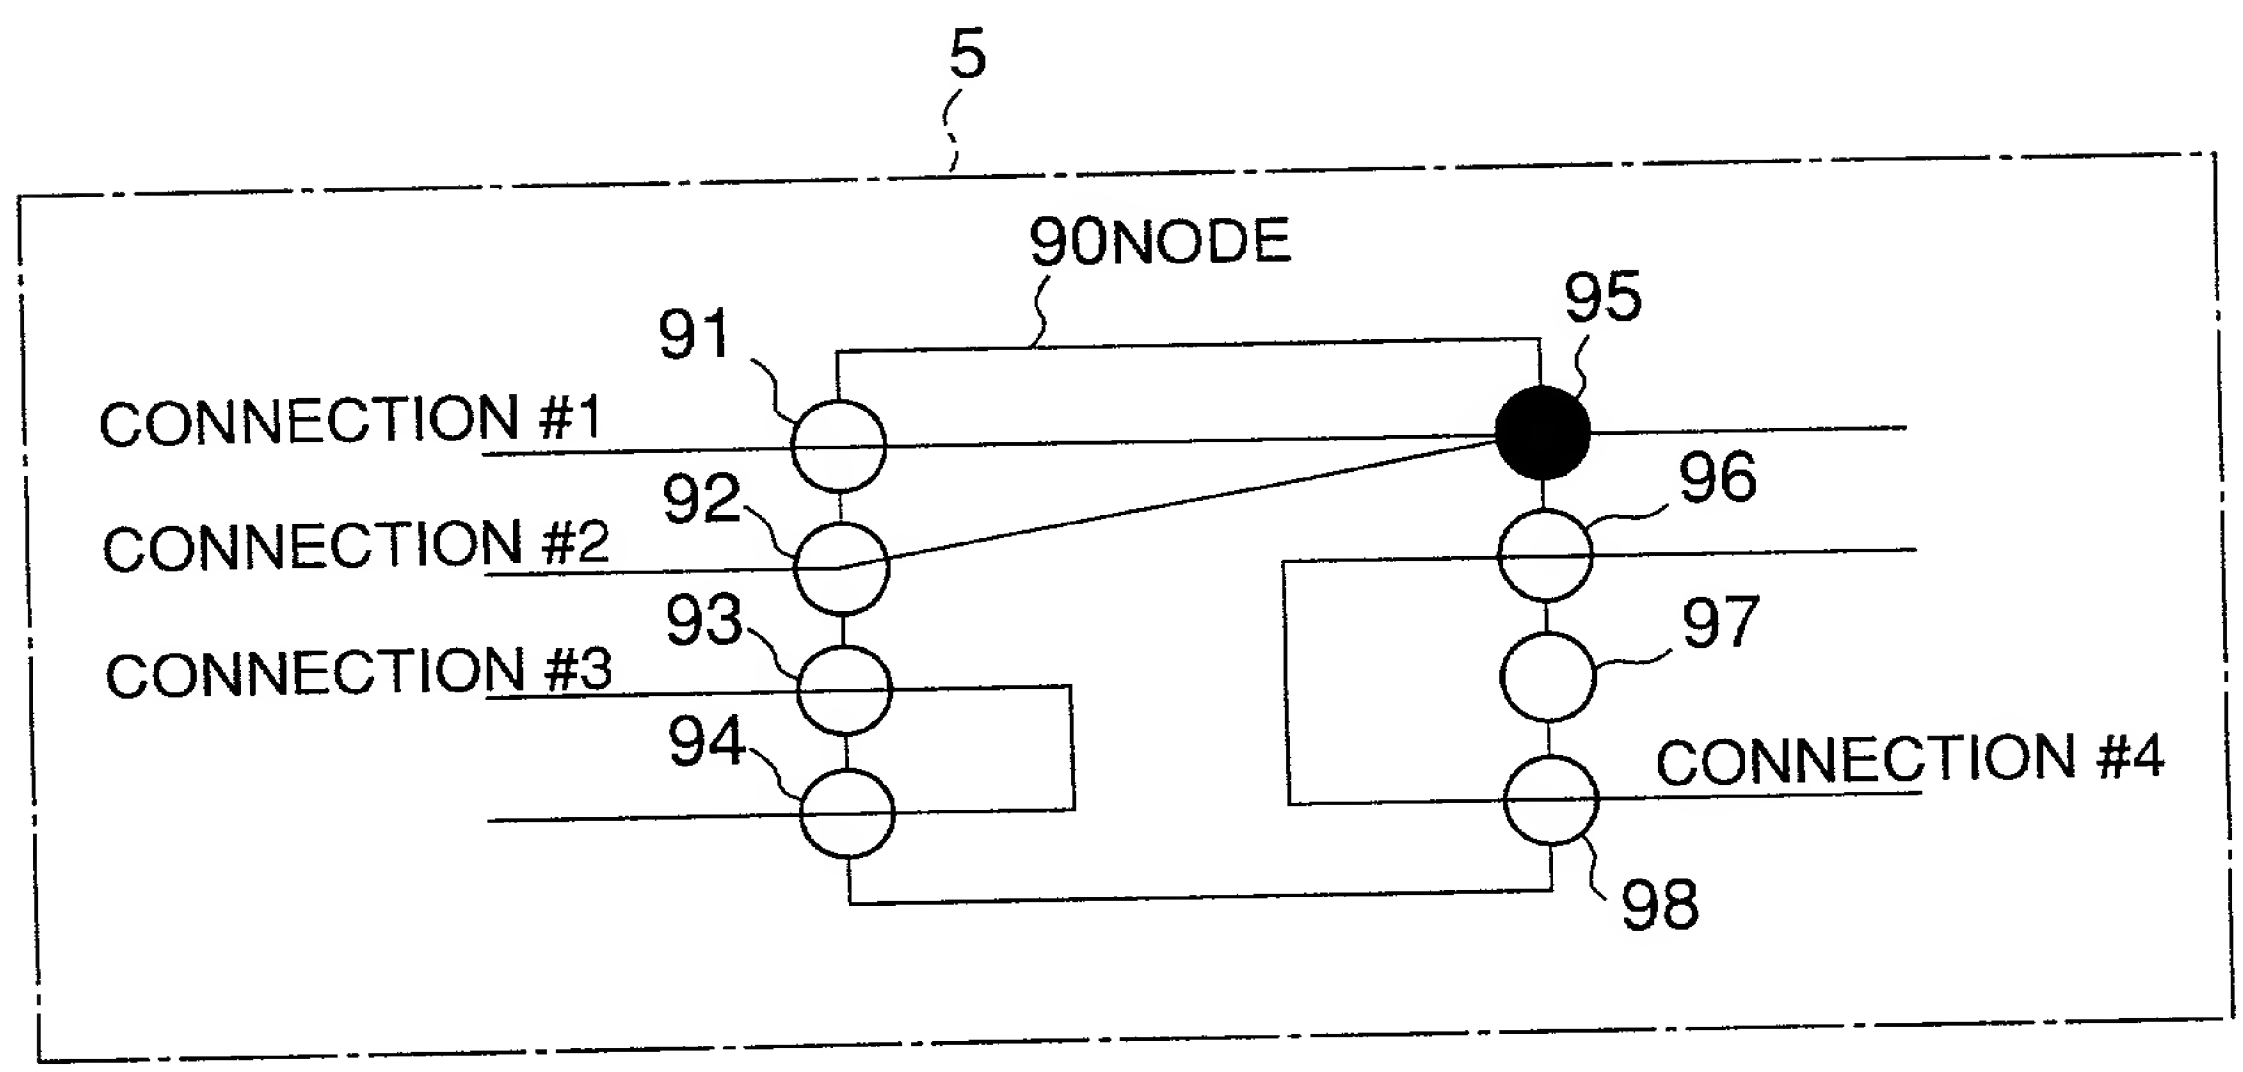
5
90NODE
91
95
CONNECTION #1
92
96
CONNECTION #2
93
97
CONNECTION #3
94
CONNECTION #4
98

FIG.19

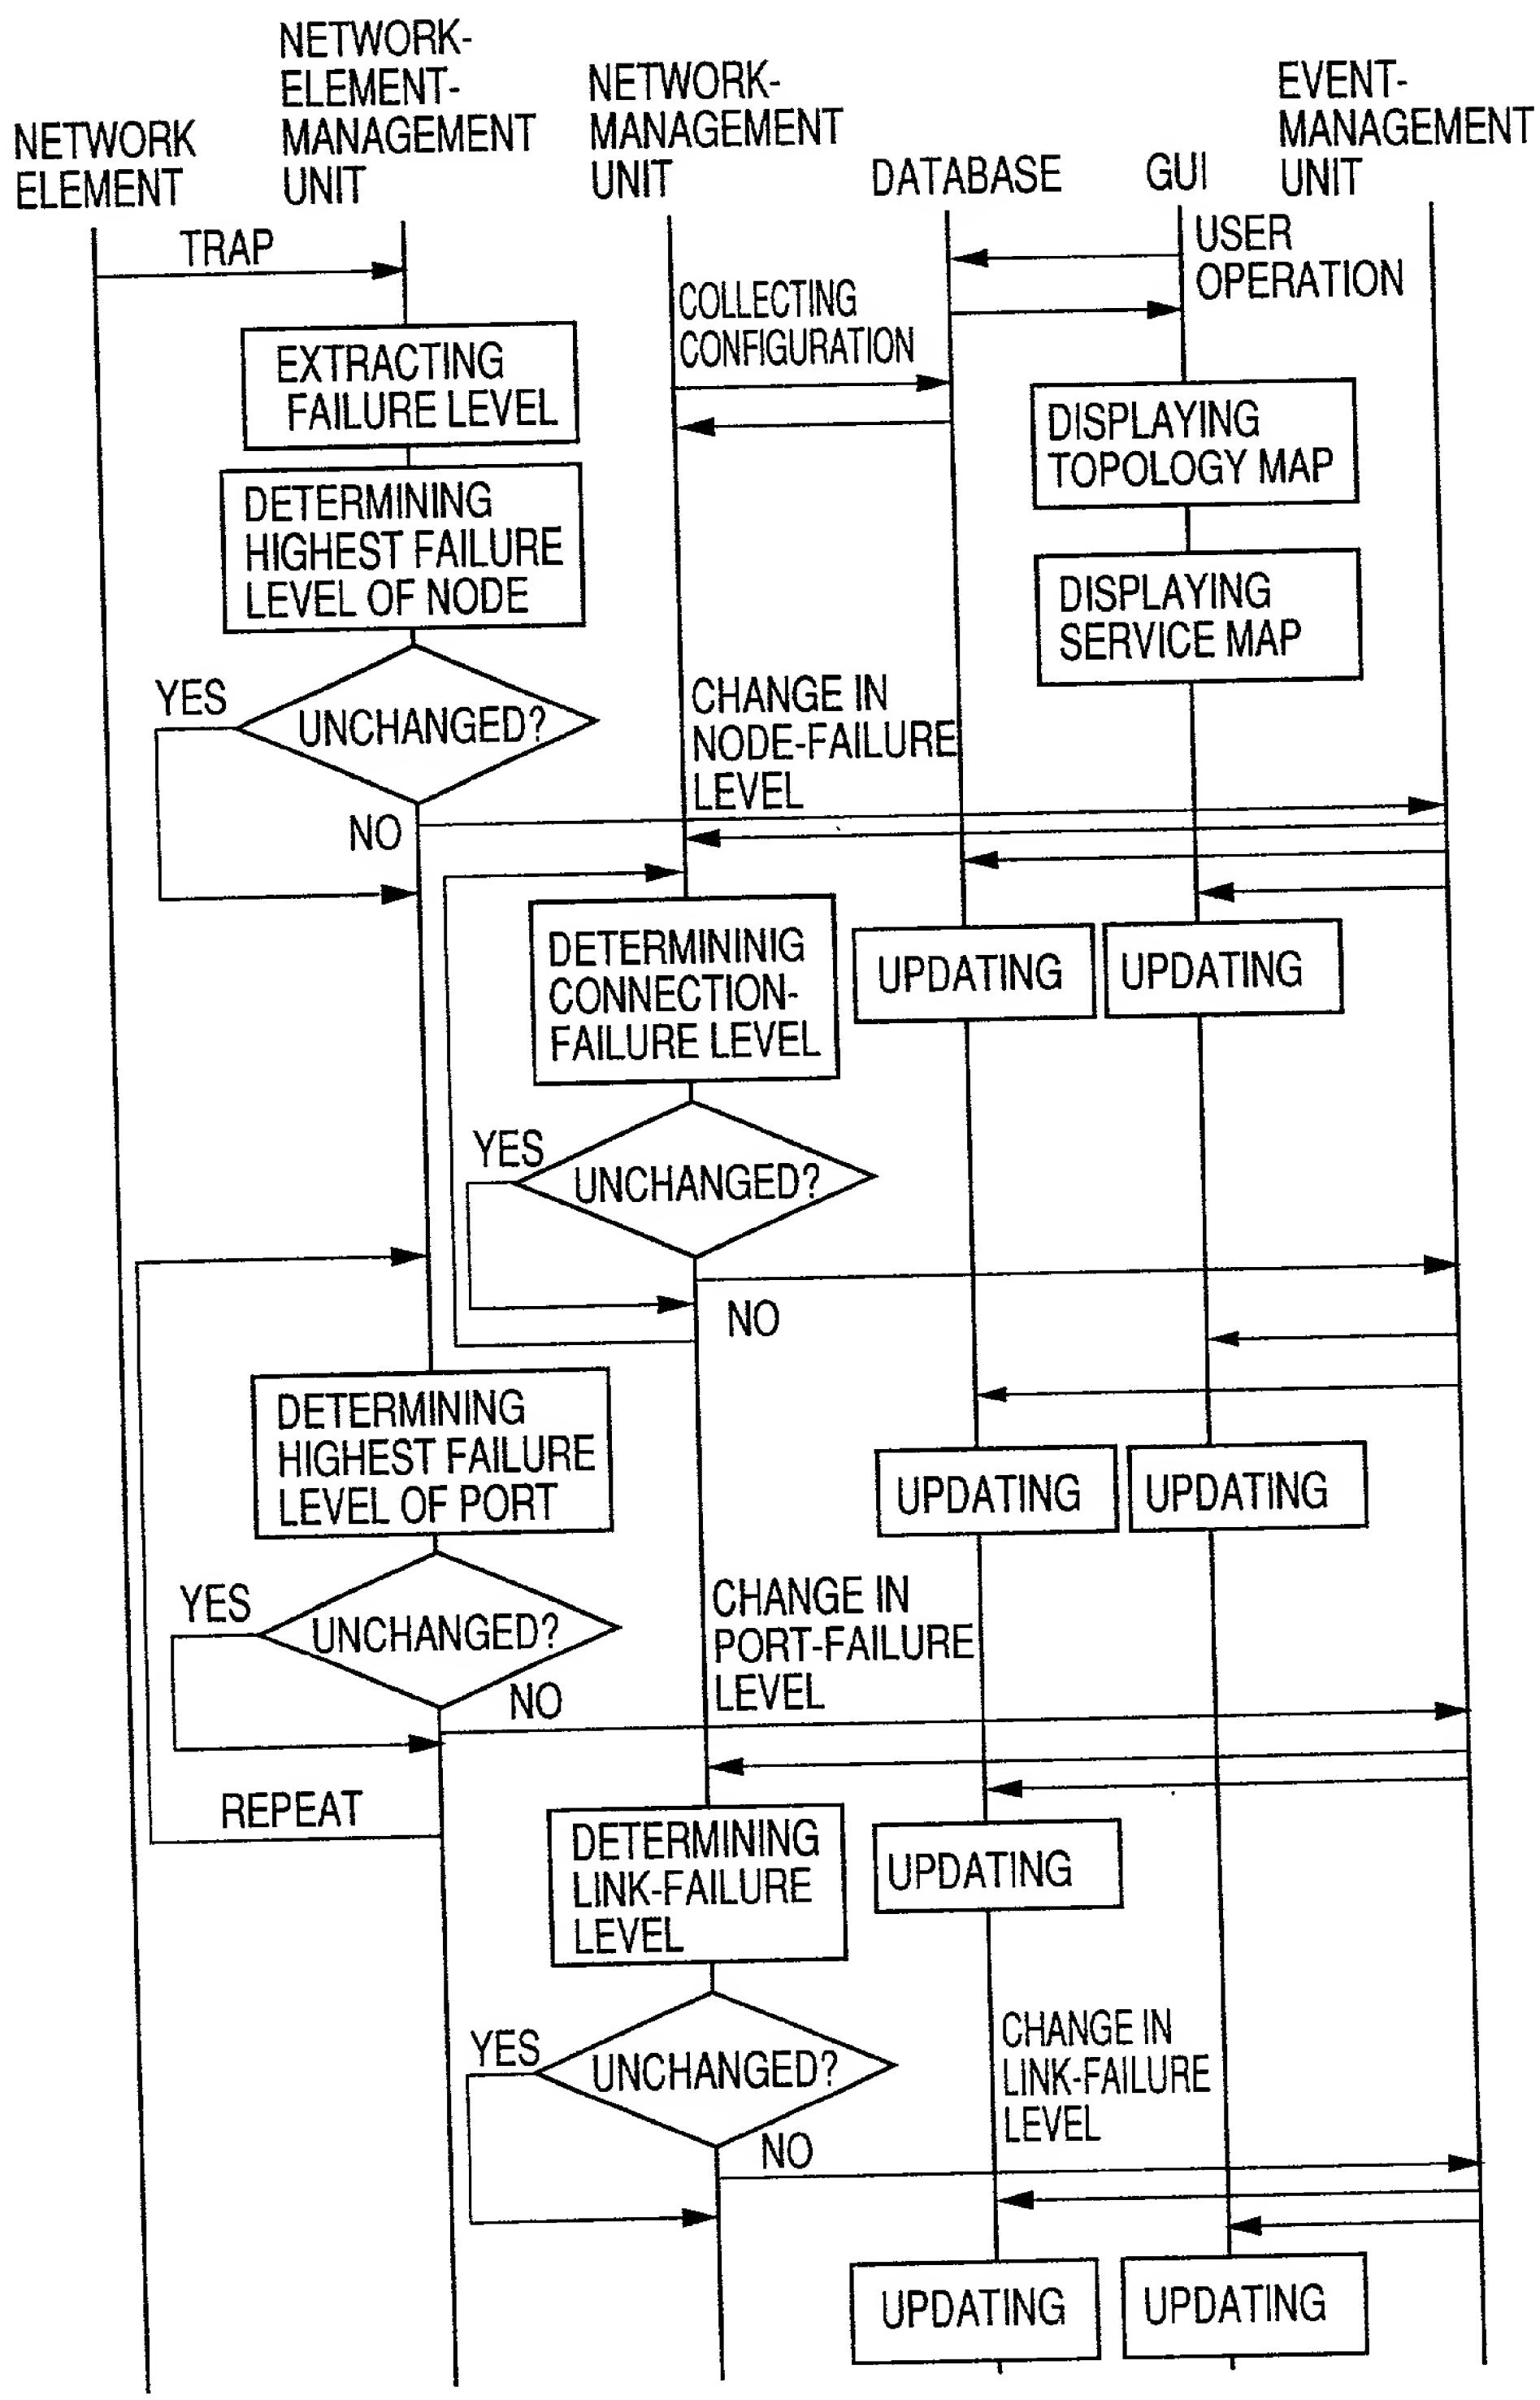
NETWORK ELEMENT
NETWORK-ELEMENT-MANAGEMENT UNIT
NETWORK-MANAGEMENT UNIT
DATABASE
GUI
EVENT-MANAGEMENT UNIT
TRAP
USER OPERATION
COLLECTING CONFIGURATION
EXTRACTING FAILURE LEVEL
DISPLAYING TOPOLOGY MAP
DETERMINING HIGHEST FAILURE LEVEL OF NODE
DISPLAYING SERVICE MAP
YES
UNCHANGED?
CHANGE IN NODE-FAILURE LEVEL
NO
DETERMININIG CONNECTION-FAILURE LEVEL
UPDATING
UPDATING
YES
UNCHANGED?
NO
DETERMINING HIGHEST FAILURE LEVEL OF PORT
UPDATING
UPDATING
YES
UNCHANGED?
CHANGE IN PORT-FAILURE LEVEL
NO
REPEAT
DETERMINING LINK-FAILURE LEVEL
UPDATING
YES
UNCHANGED?
CHANGE IN LINK-FAILURE LEVEL
NO
UPDATING
UPDATING

FIG.20

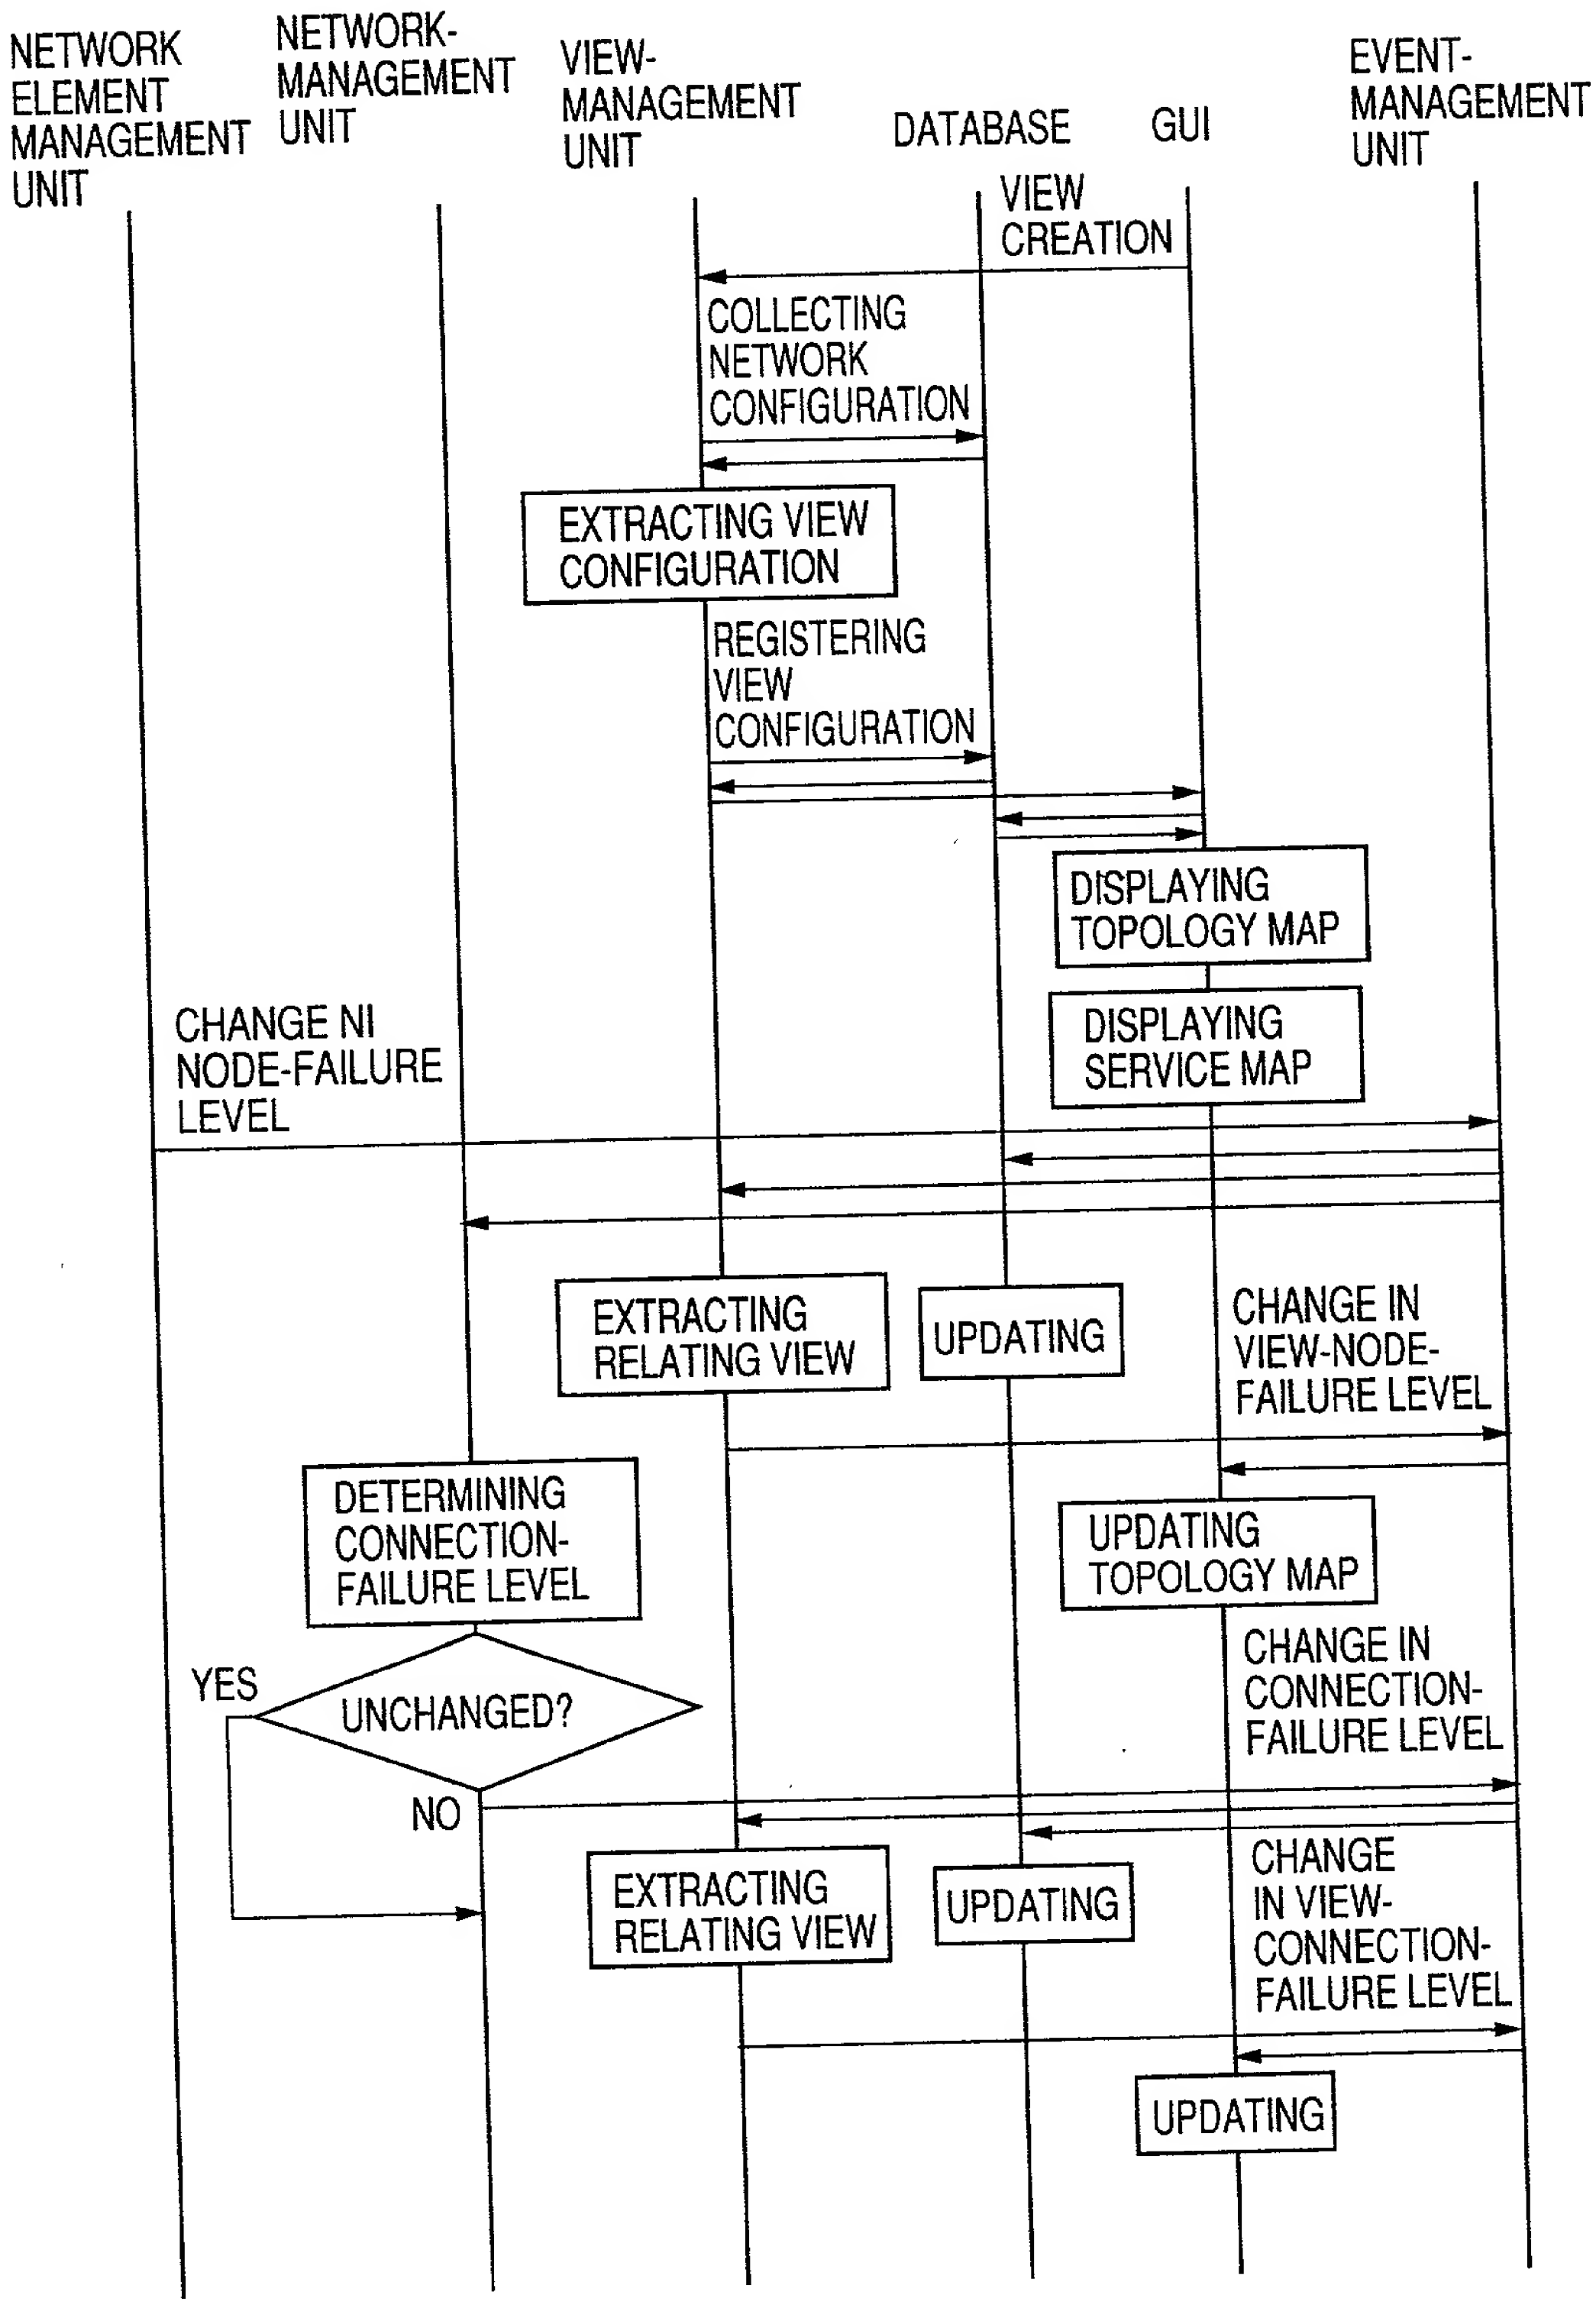

NETWORK ELEMENT MANAGEMENT UNIT
NETWORK-MANAGEMENT UNIT
VIEW-MANAGEMENT UNIT
DATABASE
GUI
EVENT-MANAGEMENT UNIT
VIEW CREATION
COLLECTING NETWORK CONFIGURATION
EXTRACTING VIEW CONFIGURATION
REGISTERING VIEW CONFIGURATION
DISPLAYING TOPOLOGY MAP
DISPLAYING SERVICE MAP
CHANGE NI NODE-FAILURE LEVEL
EXTRACTING RELATING VIEW
UPDATING
CHANGE IN VIEW-NODE-FAILURE LEVEL
DETERMINING CONNECTION-FAILURE LEVEL
UPDATING TOPOLOGY MAP
YES
UNCHANGED?
NO
CHANGE IN CONNECTION-FAILURE LEVEL
EXTRACTING RELATING VIEW
UPDATING
CHANGE IN VIEW-CONNECTION-FAILURE LEVEL
UPDATING

FIG.21

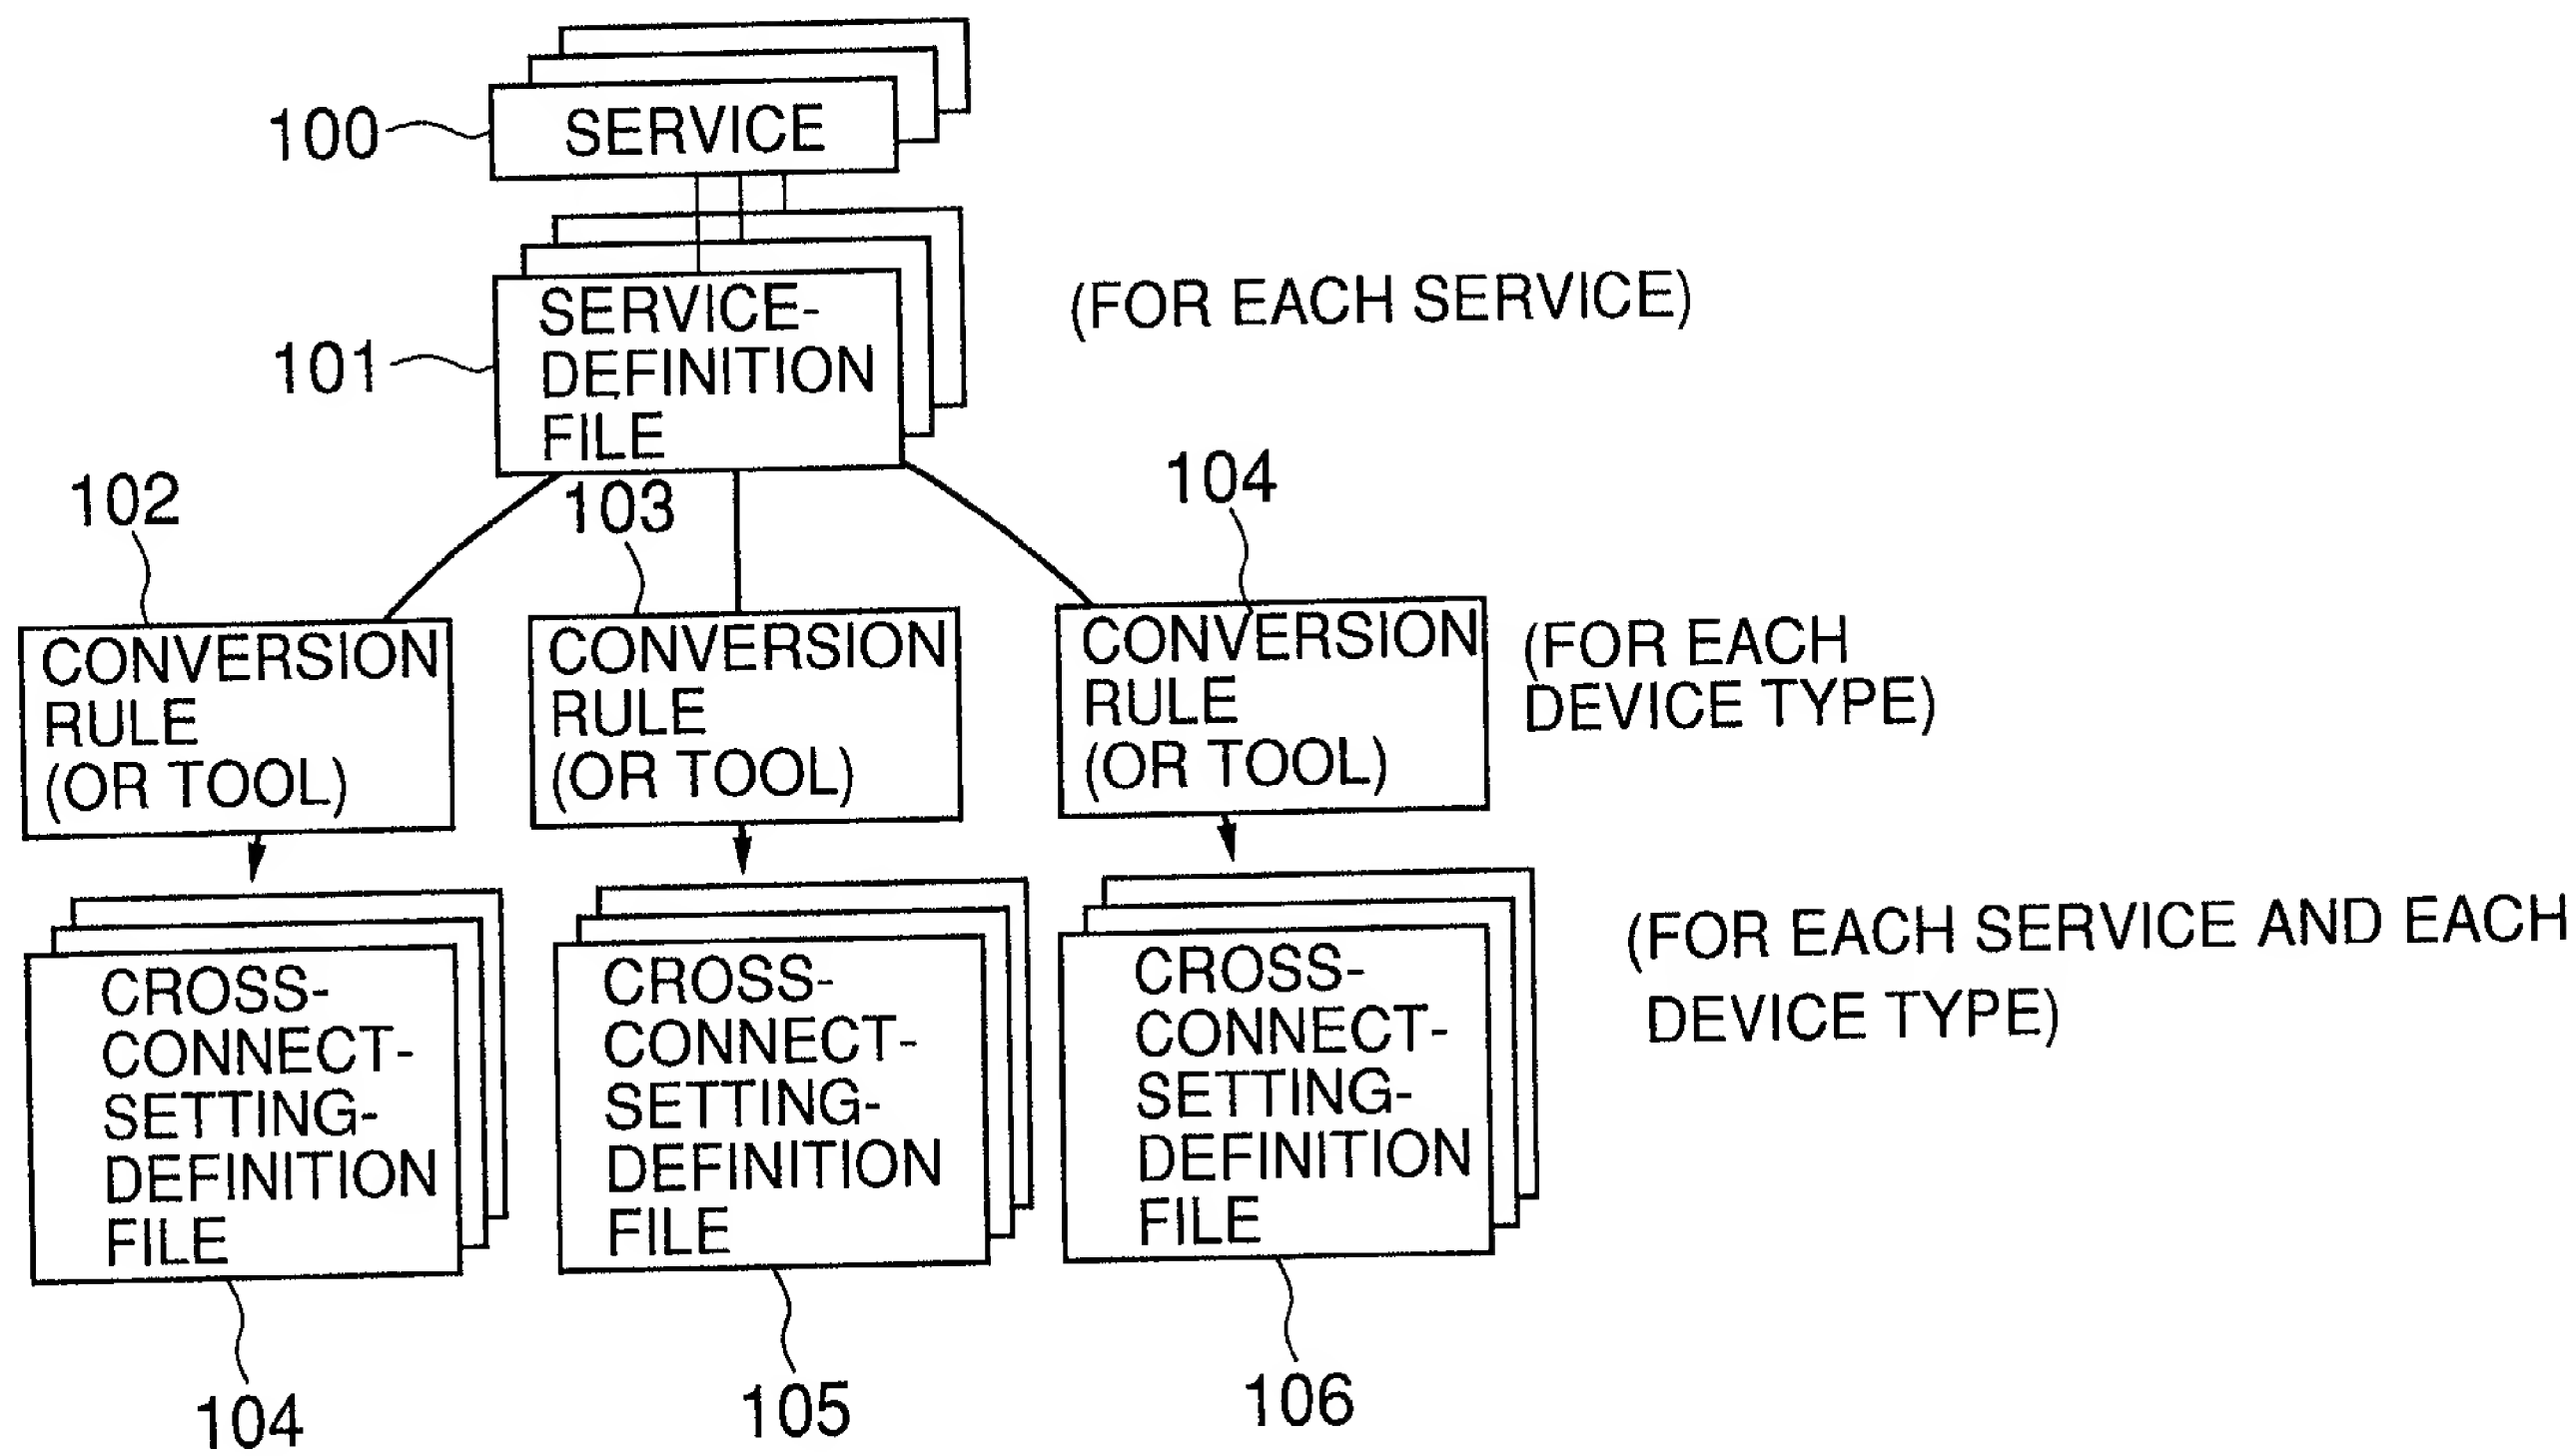
100
SERVICE
101
SERVICE-DEFINITION FILE
(FOR EACH SERVICE)
102
103
104
CONVERSION RULE (OR TOOL)
CONVERSION RULE (OR TOOL)
CONVERSION RULE (OR TOOL)
(FOR EACH DEVICE TYPE)
CROSS-CONNECT-SETTING-DEFINITION FILE
CROSS-CONNECT-SETTING-DEFINITION FILE
CROSS-CONNECT-SETTING-DEFINITION FILE
(FOR EACH SERVICE AND EACH DEVICE TYPE)
104
105
106

FIG.22

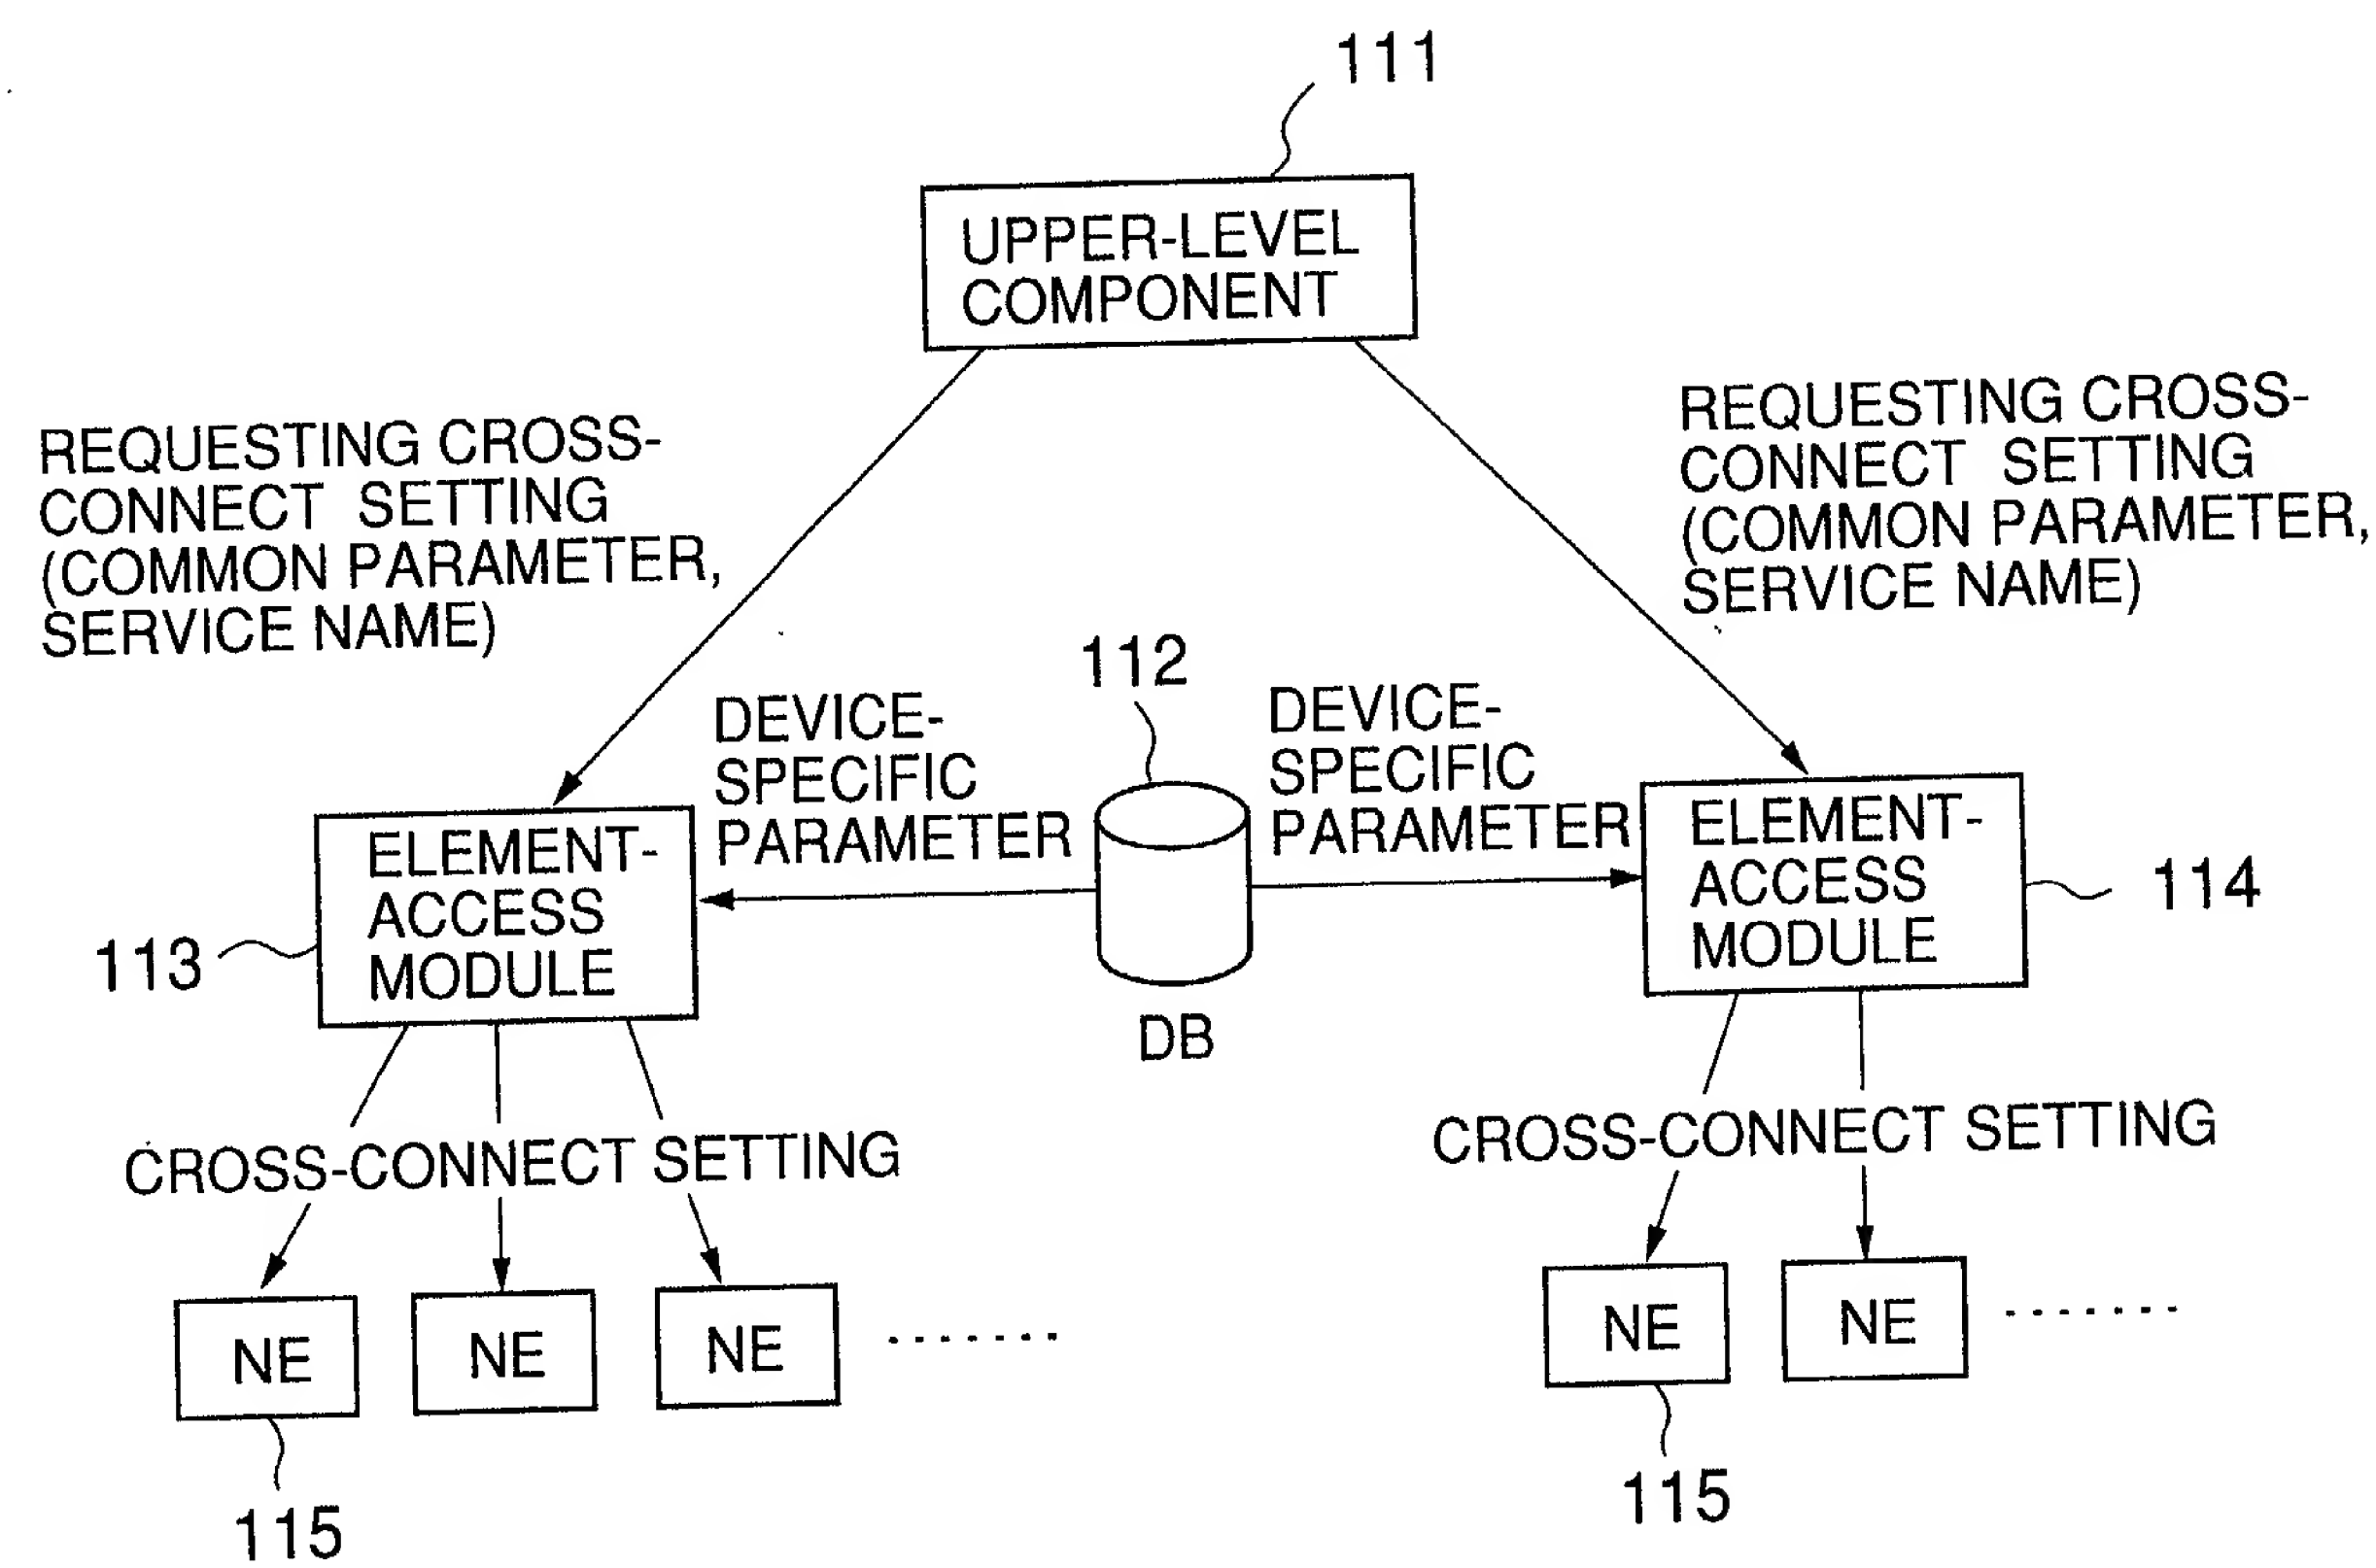
111
UPPER-LEVEL COMPONENT
REQUESTING CROSS-CONNECT SETTING (COMMON PARAMETER, SERVICE NAME)
REQUESTING CROSS-CONNECT SETTING (COMMON PARAMETER, SERVICE NAME)
112
DB
DEVICE-SPECIFIC PARAMETER
DEVICE-SPECIFIC PARAMETER
113
ELEMENT-ACCESS MODULE
114
ELEMENT-ACCESS MODULE
CROSS-CONNECT SETTING
CROSS-CONNECT SETTING
NE
NE
NE
NE
NE
....
....
115
115

FIG.23

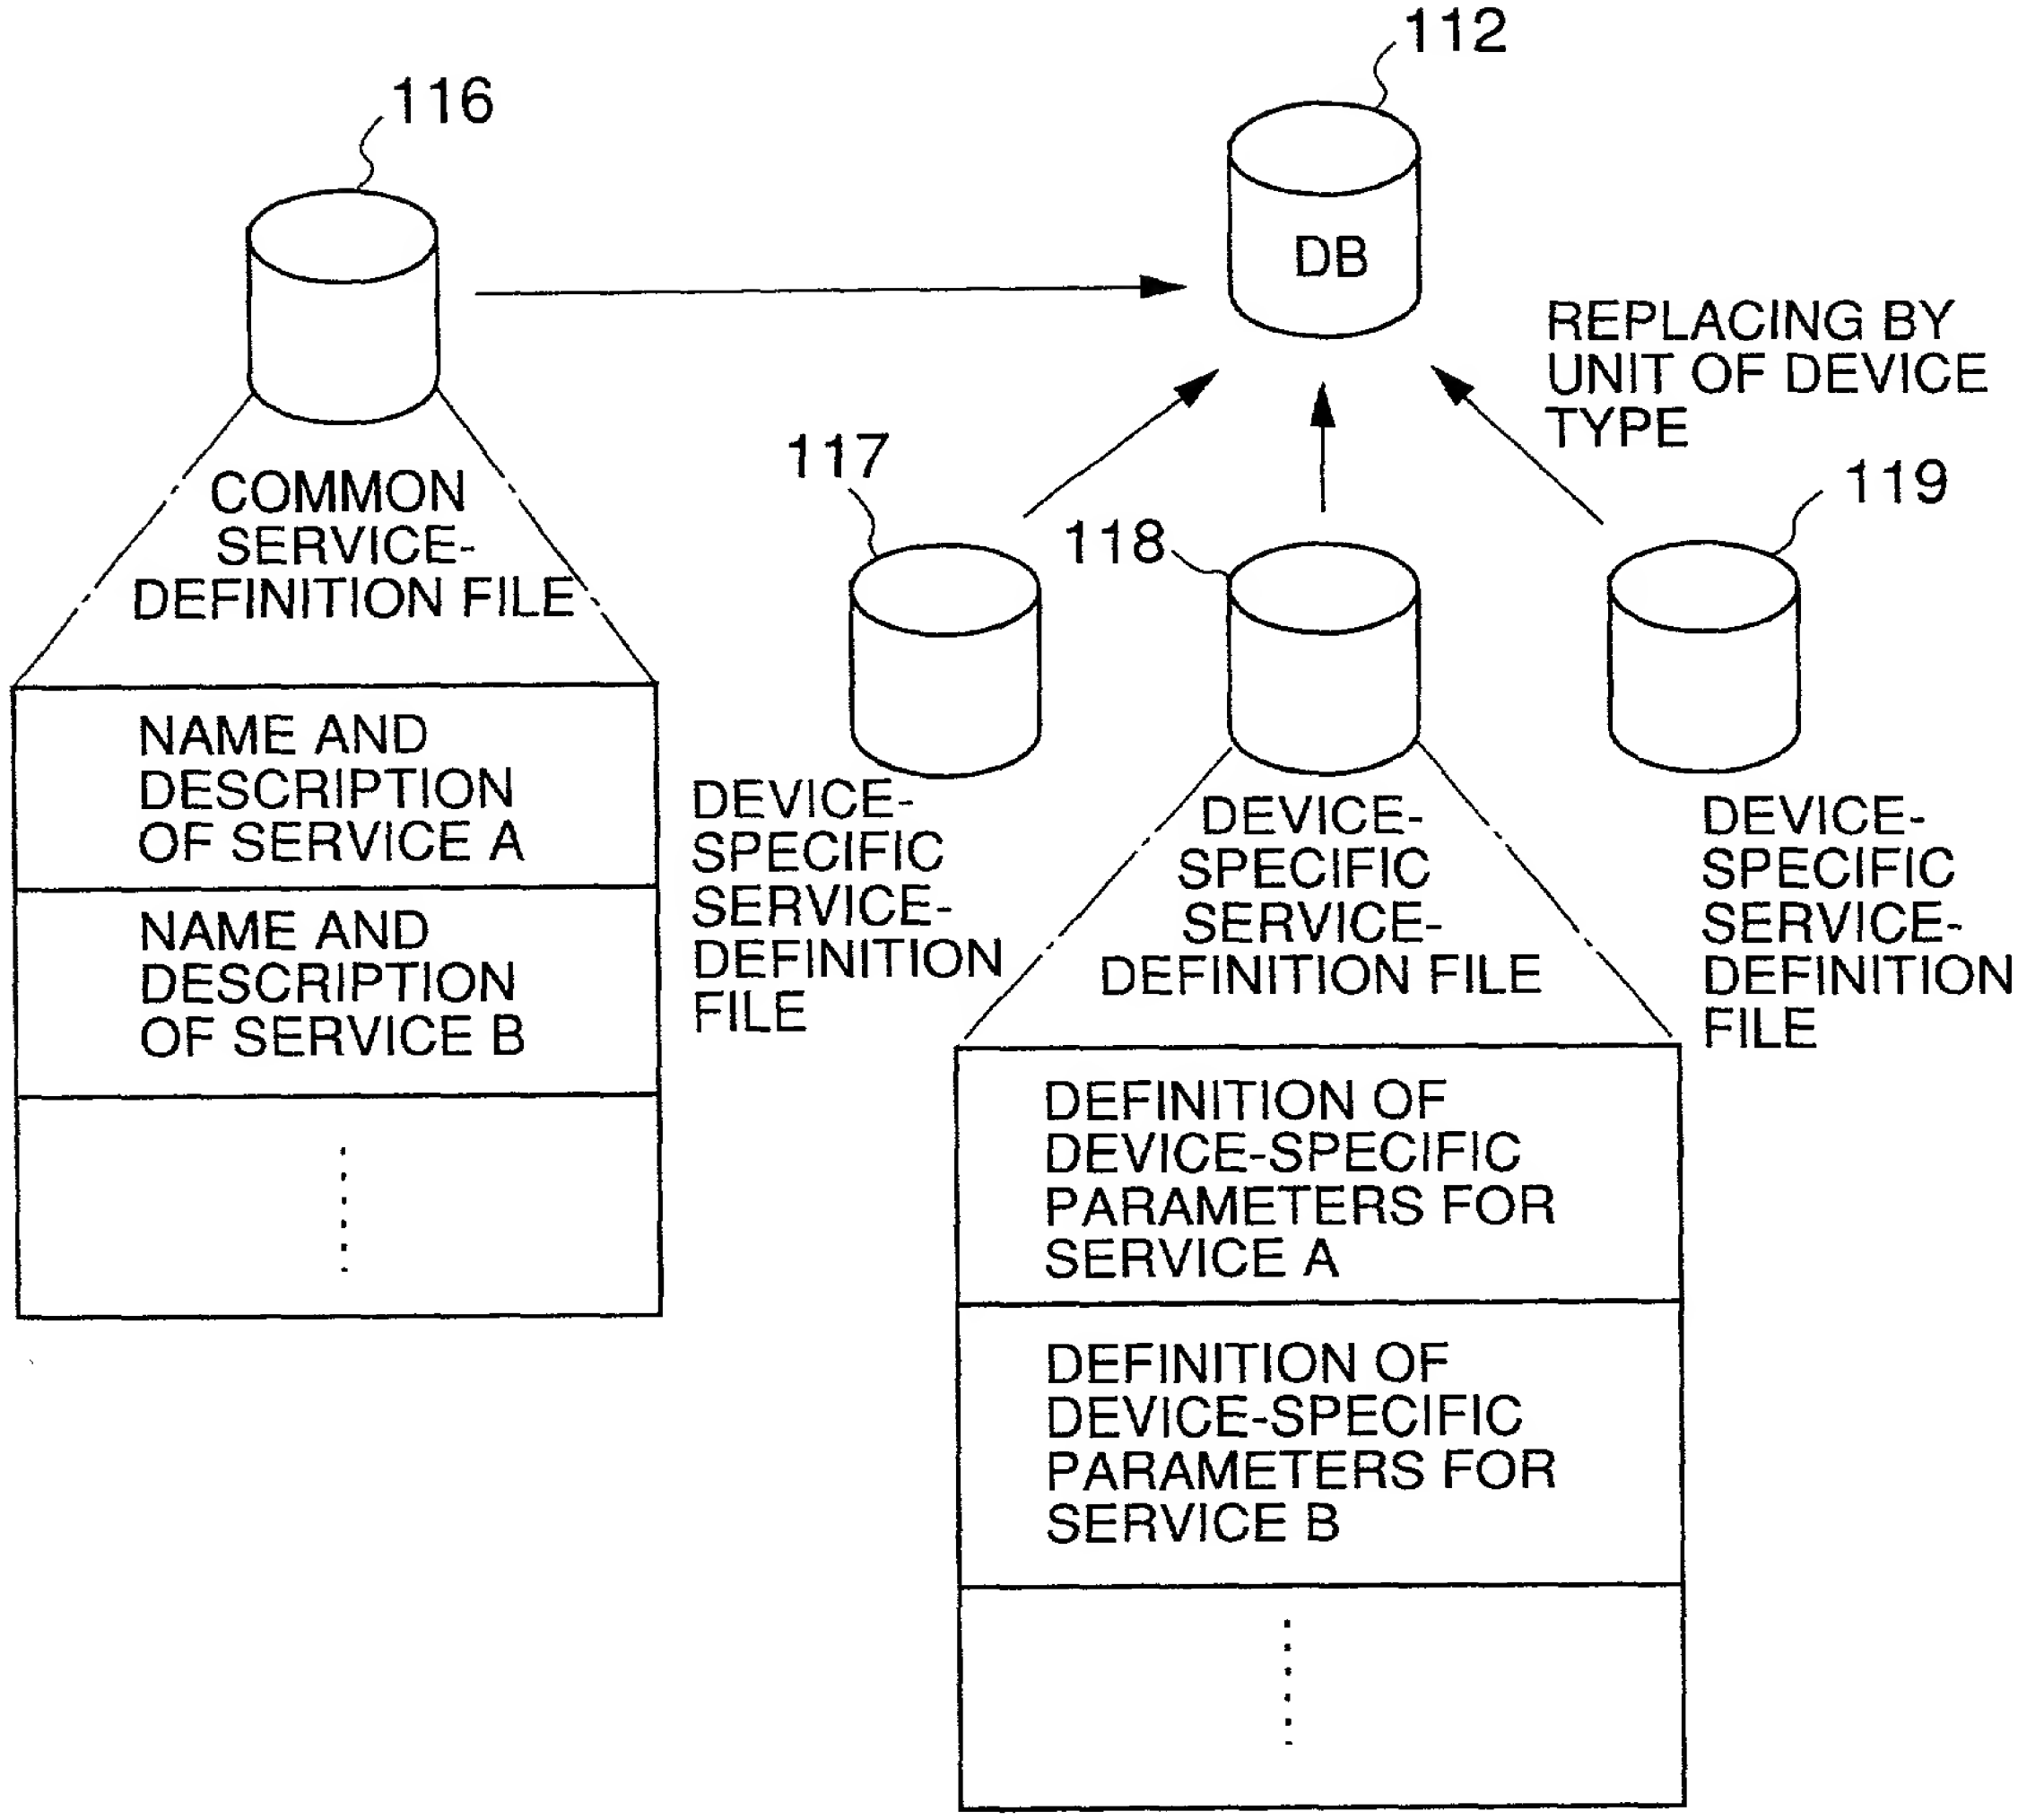

116
112
DB
REPLACING BY UNIT OF DEVICE TYPE
COMMON SERVICE-DEFINITION FILE
NAME AND DESCRIPTION OF SERVICE A
NAME AND DESCRIPTION OF SERVICE B
117
118
119
DEVICE-SPECIFIC SERVICE-DEFINITION FILE
DEVICE-SPECIFIC SERVICE-DEFINITION FILE
DEVICE-SPECIFIC SERVICE-DEFINITION FILE
DEFINITION OF DEVICE-SPECIFIC PARAMETERS FOR SERVICE A
DEFINITION OF DEVICE-SPECIFIC PARAMETERS FOR SERVICE B

FIG.24

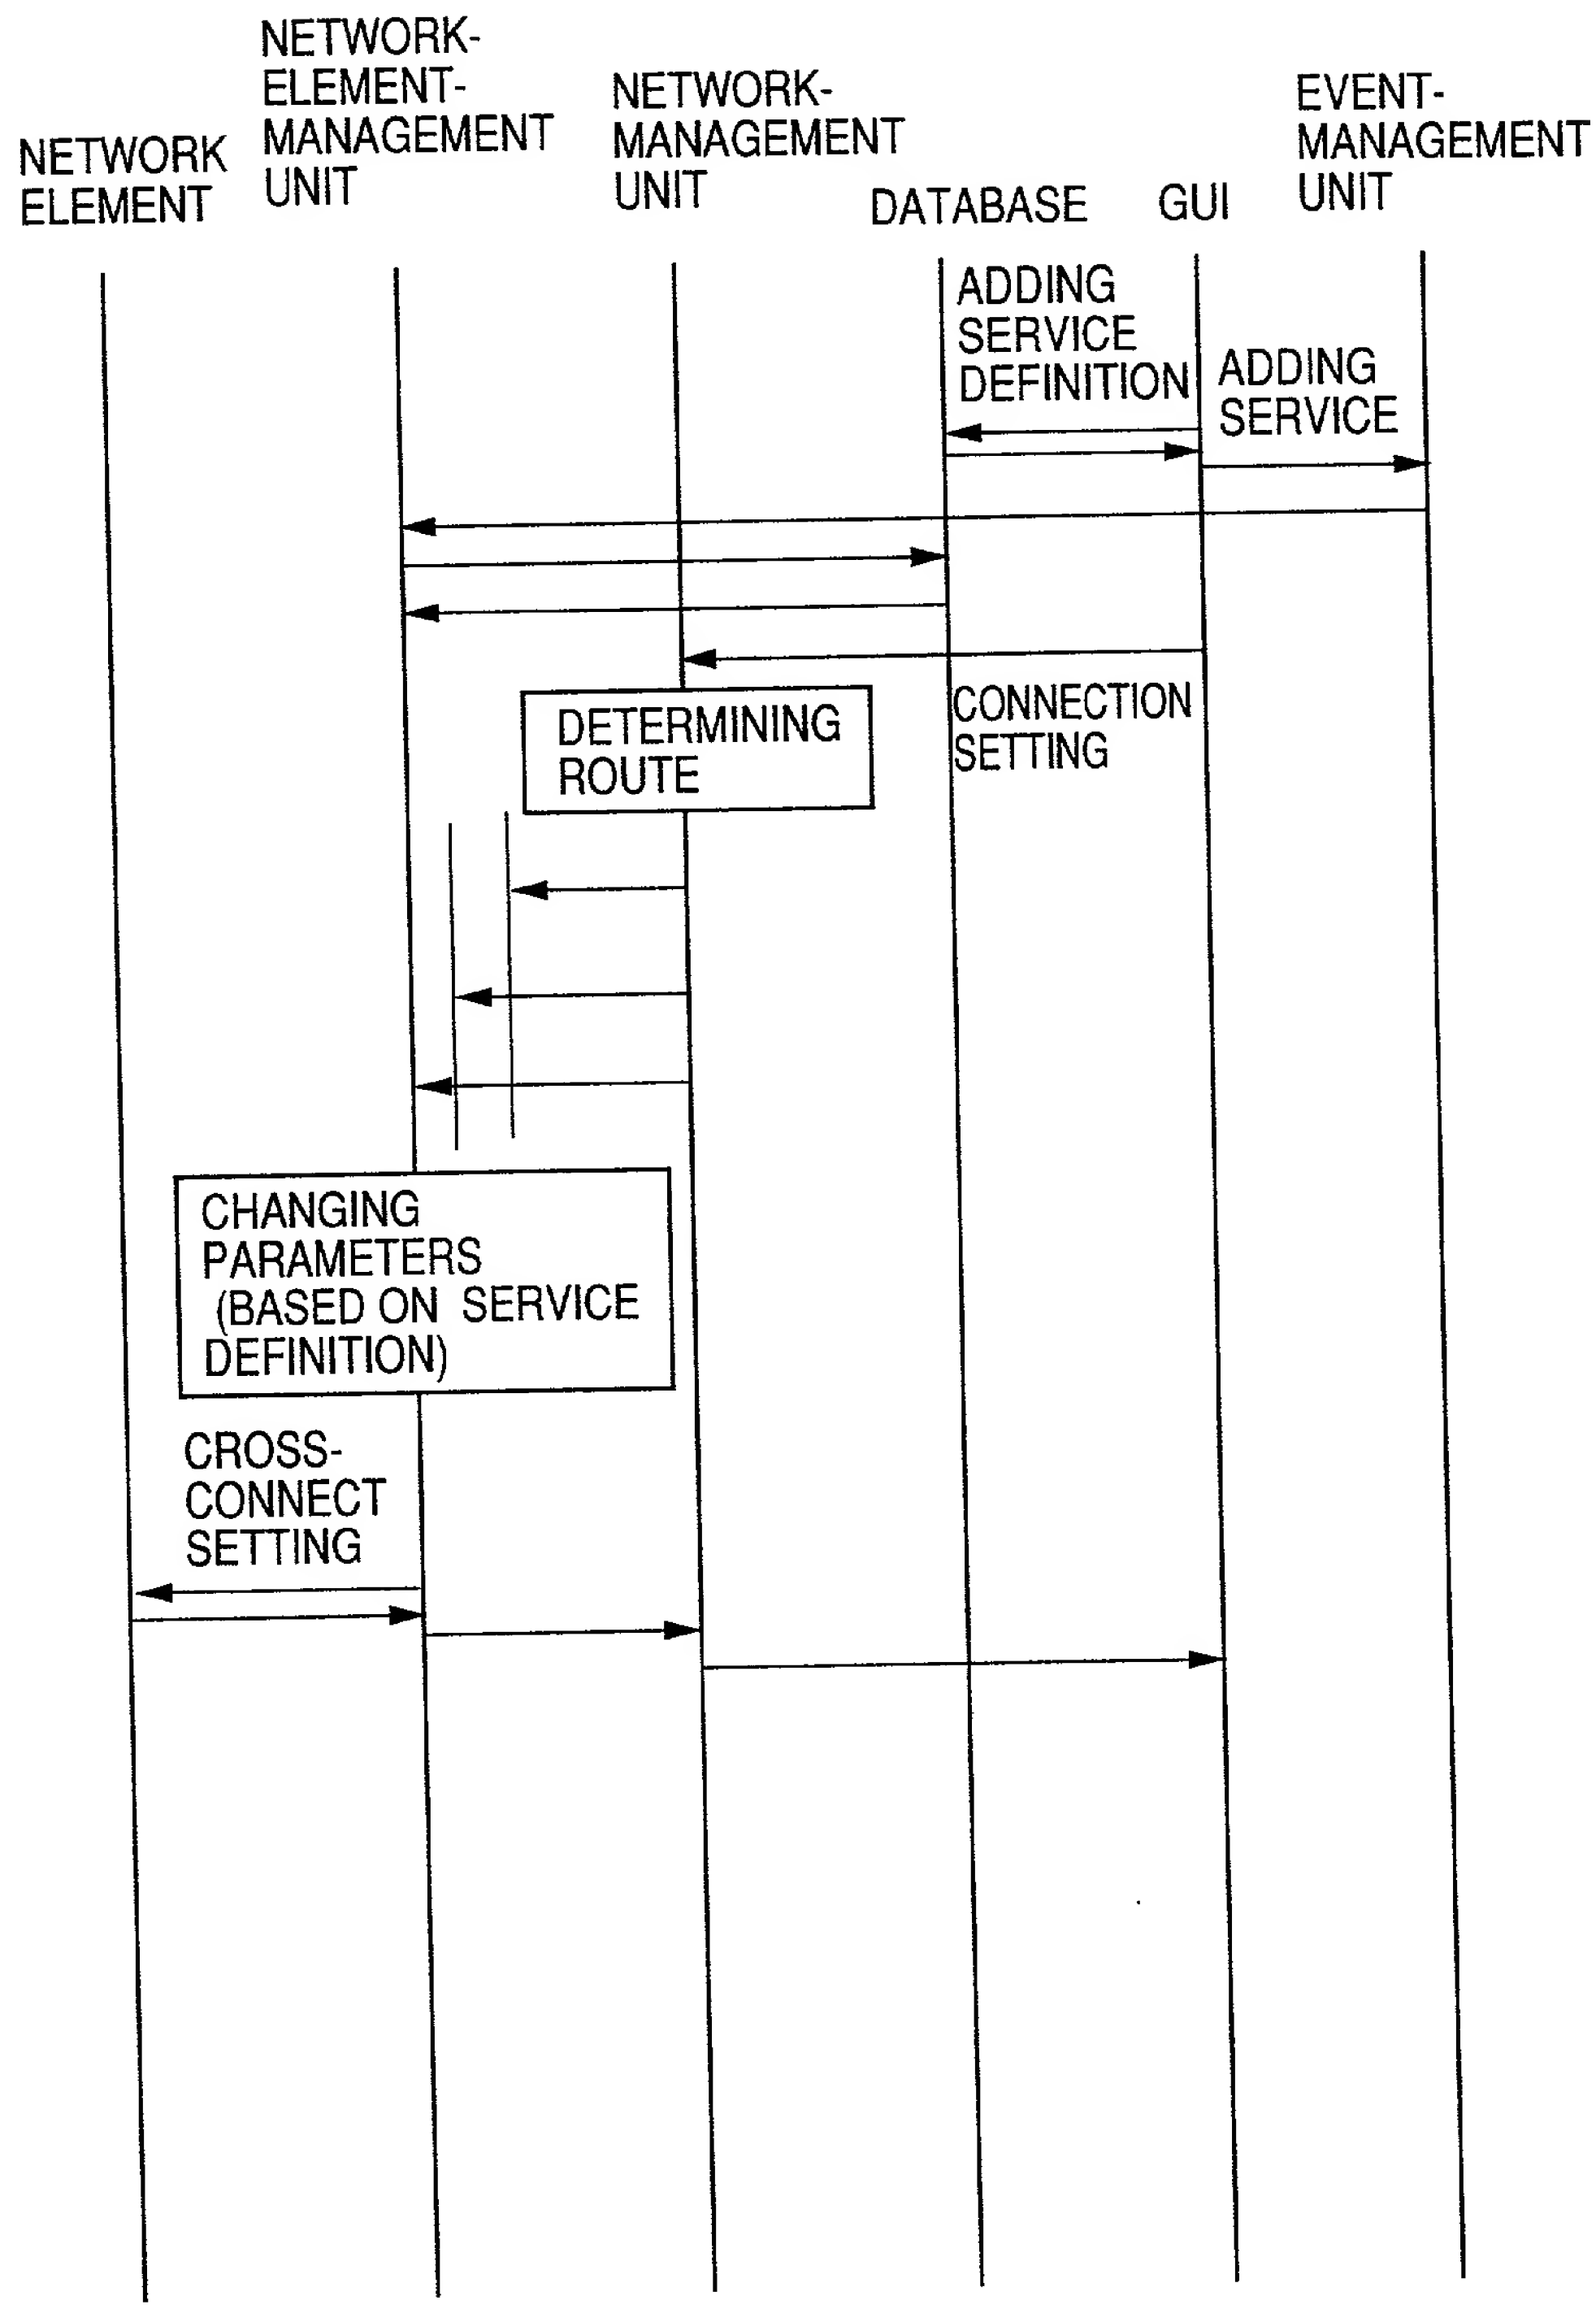
NETWORK ELEMENT
NETWORK-ELEMENT-MANAGEMENT UNIT
NETWORK-MANAGEMENT UNIT
DATABASE
GUI
EVENT-MANAGEMENT UNIT
ADDING SERVICE DEFINITION
ADDING SERVICE
CONNECTION SETTING
DETERMINING ROUTE
CHANGING PARAMETERS (BASED ON SERVICE DEFINITION)
CROSS-CONNECT SETTING

FIG.25

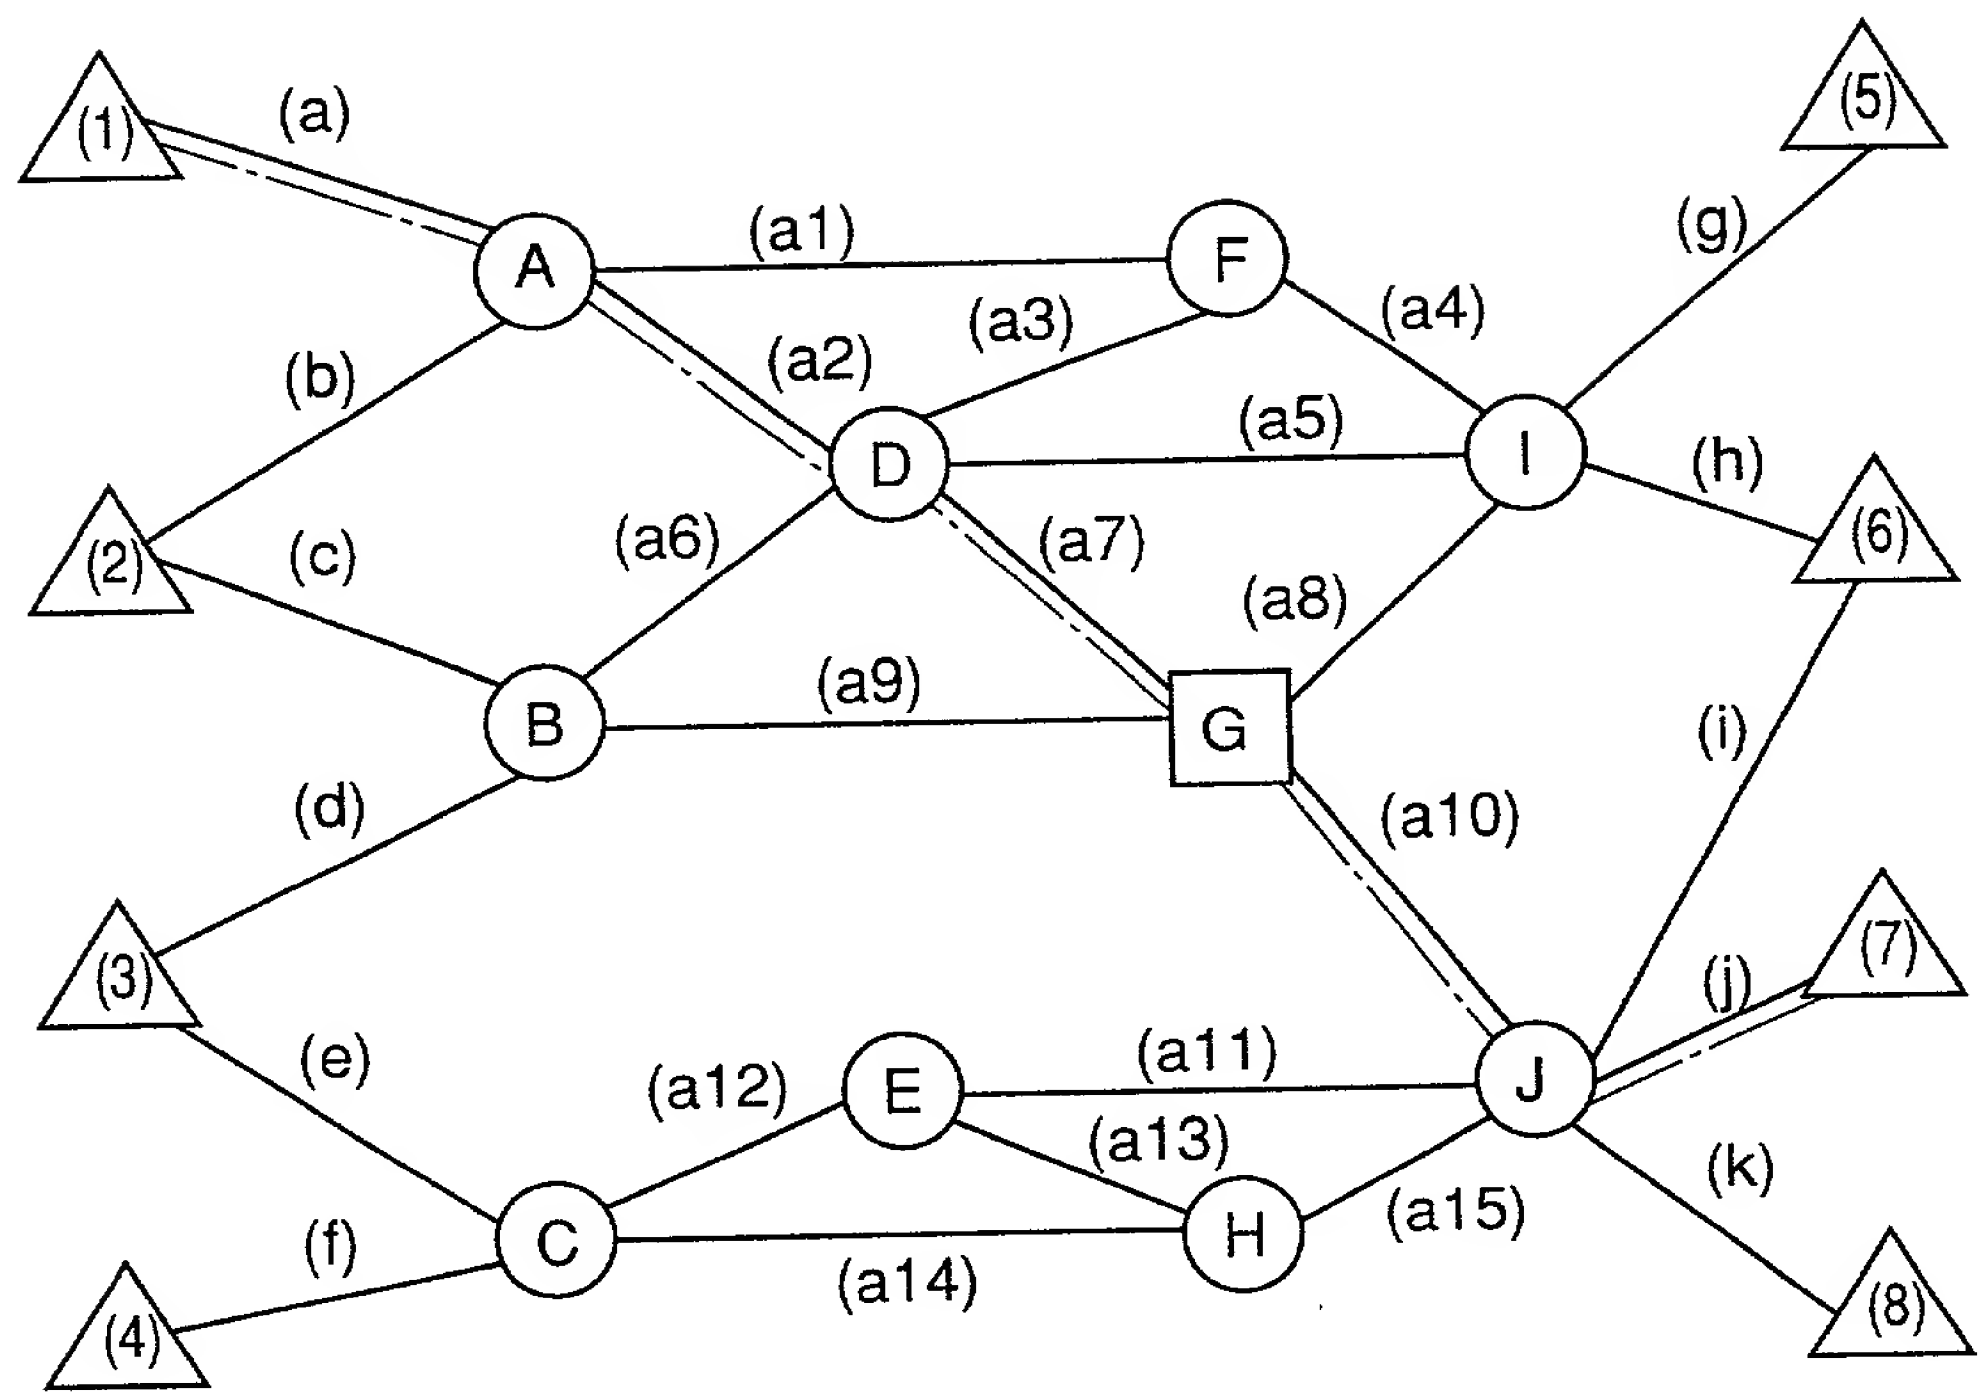
(1)
(2)
(3)
(4)
(5)
(6)
(7)
(8)
A
B
C
D
E
F
G
H
I
J
(a)
(b)
(c)
(d)
(e)
(f)
(g)
(h)
(i)
(j)
(k)
(a1)
(a2)
(a3)
(a4)
(a5)
(a6)
(a7)
(a8)
(a9)
(a10)
(a11)
(a12)
(a13)
(a14)
(a15)

FIG.26

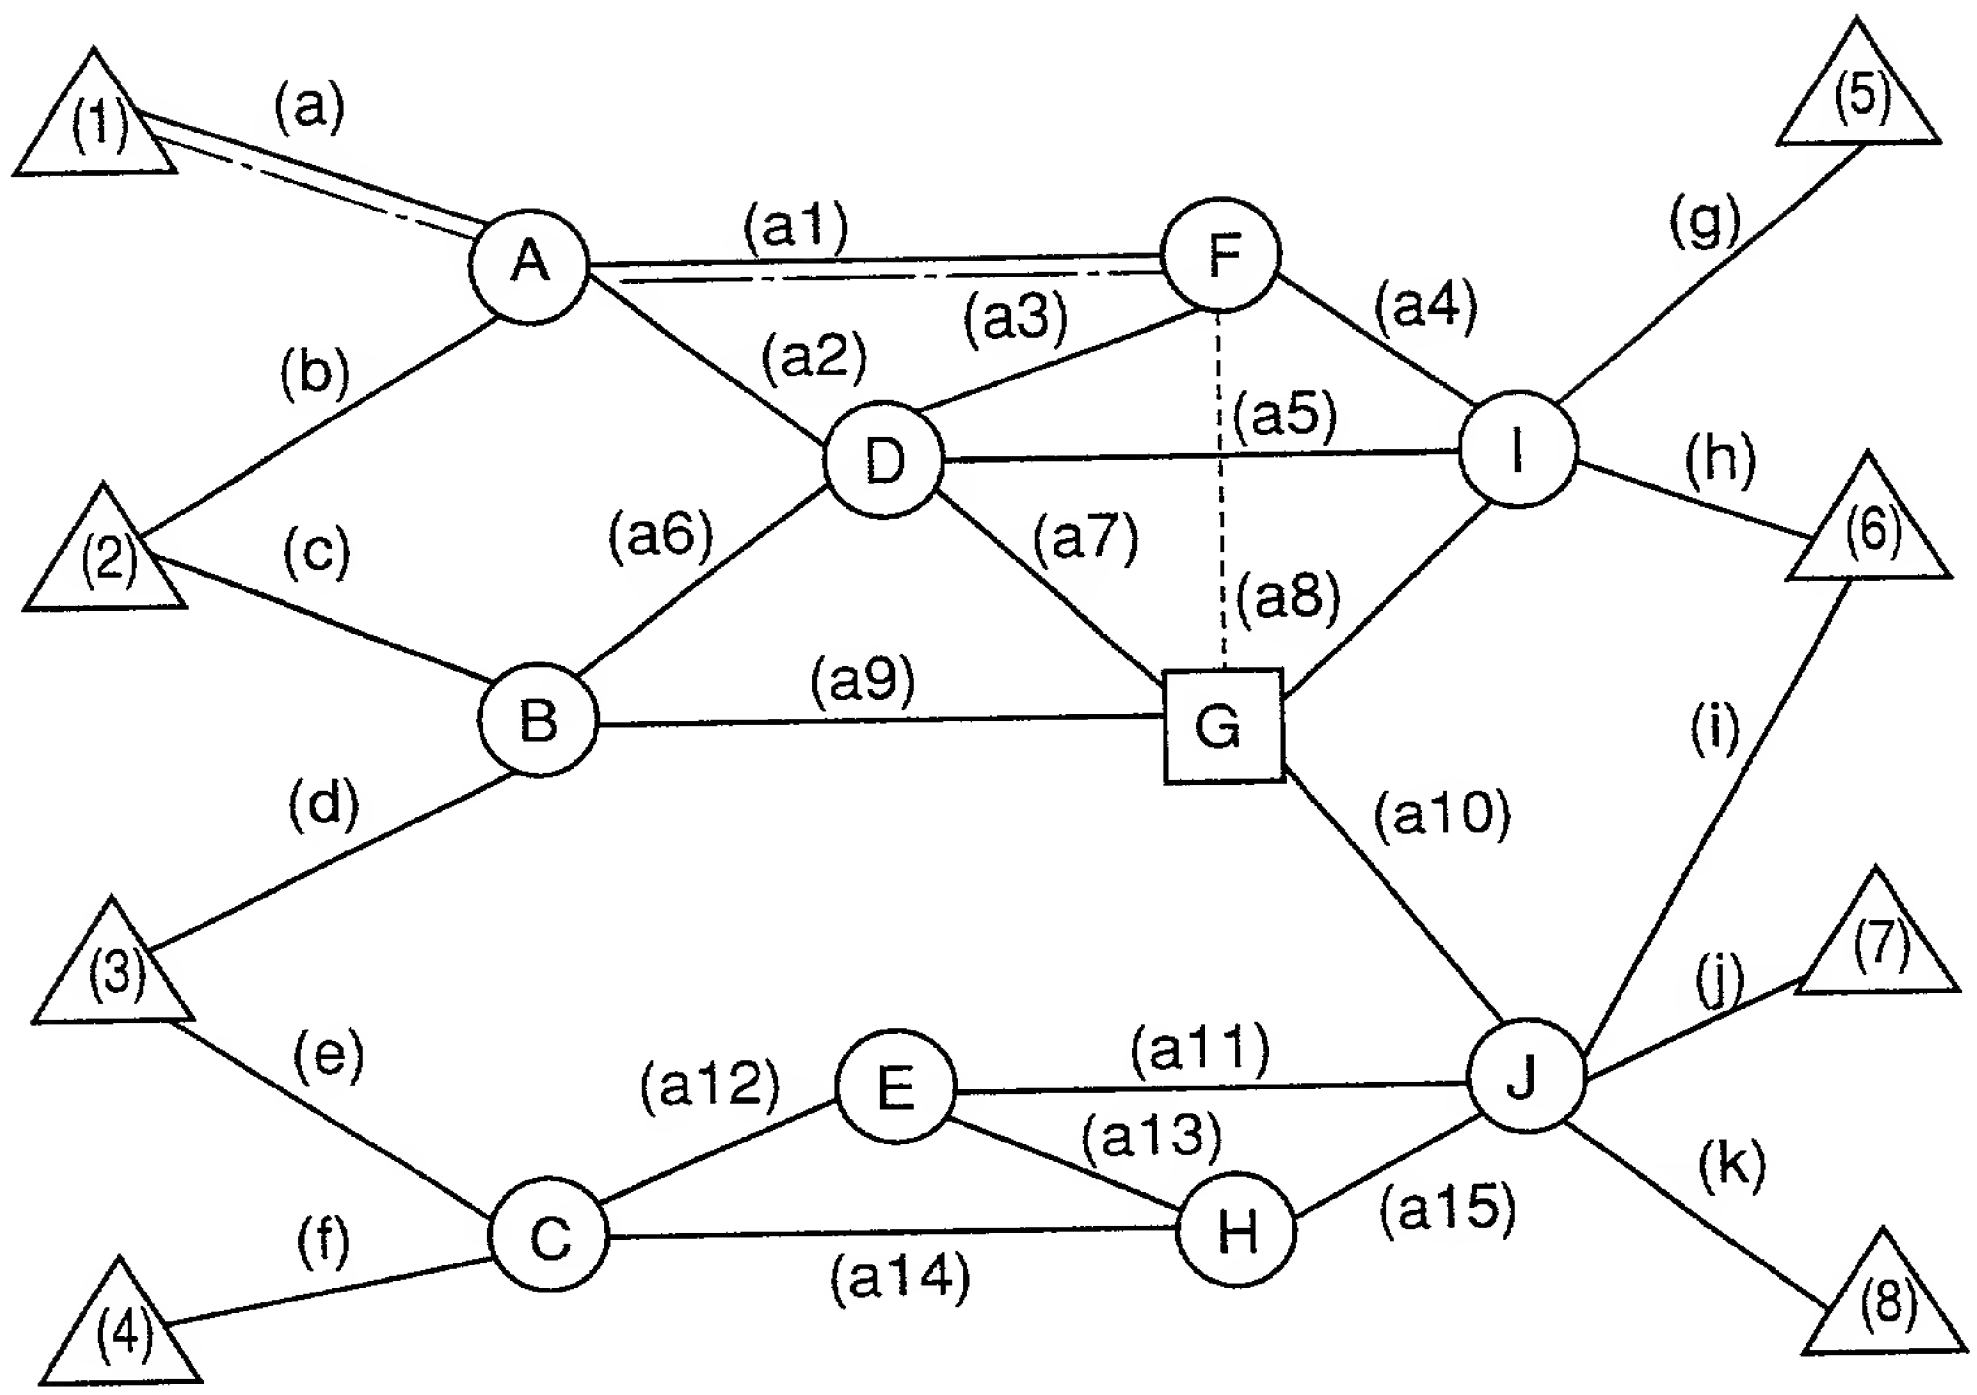
(1)
(a)
A
(a1)
F
(a4)
(g)
(5)
(b)
(a2)
(a3)
(a5)
I
(h)
(2)
(c)
(a6)
D
(a7)
(a8)
(6)
B
(a9)
G
(i)
(d)
(a10)
(3)
(e)
(a12)
E
(a11)
J
(j)
(7)
(a13)
(k)
(f)
C
(a14)
H
(a15)
(4)
(8)

FIG.27

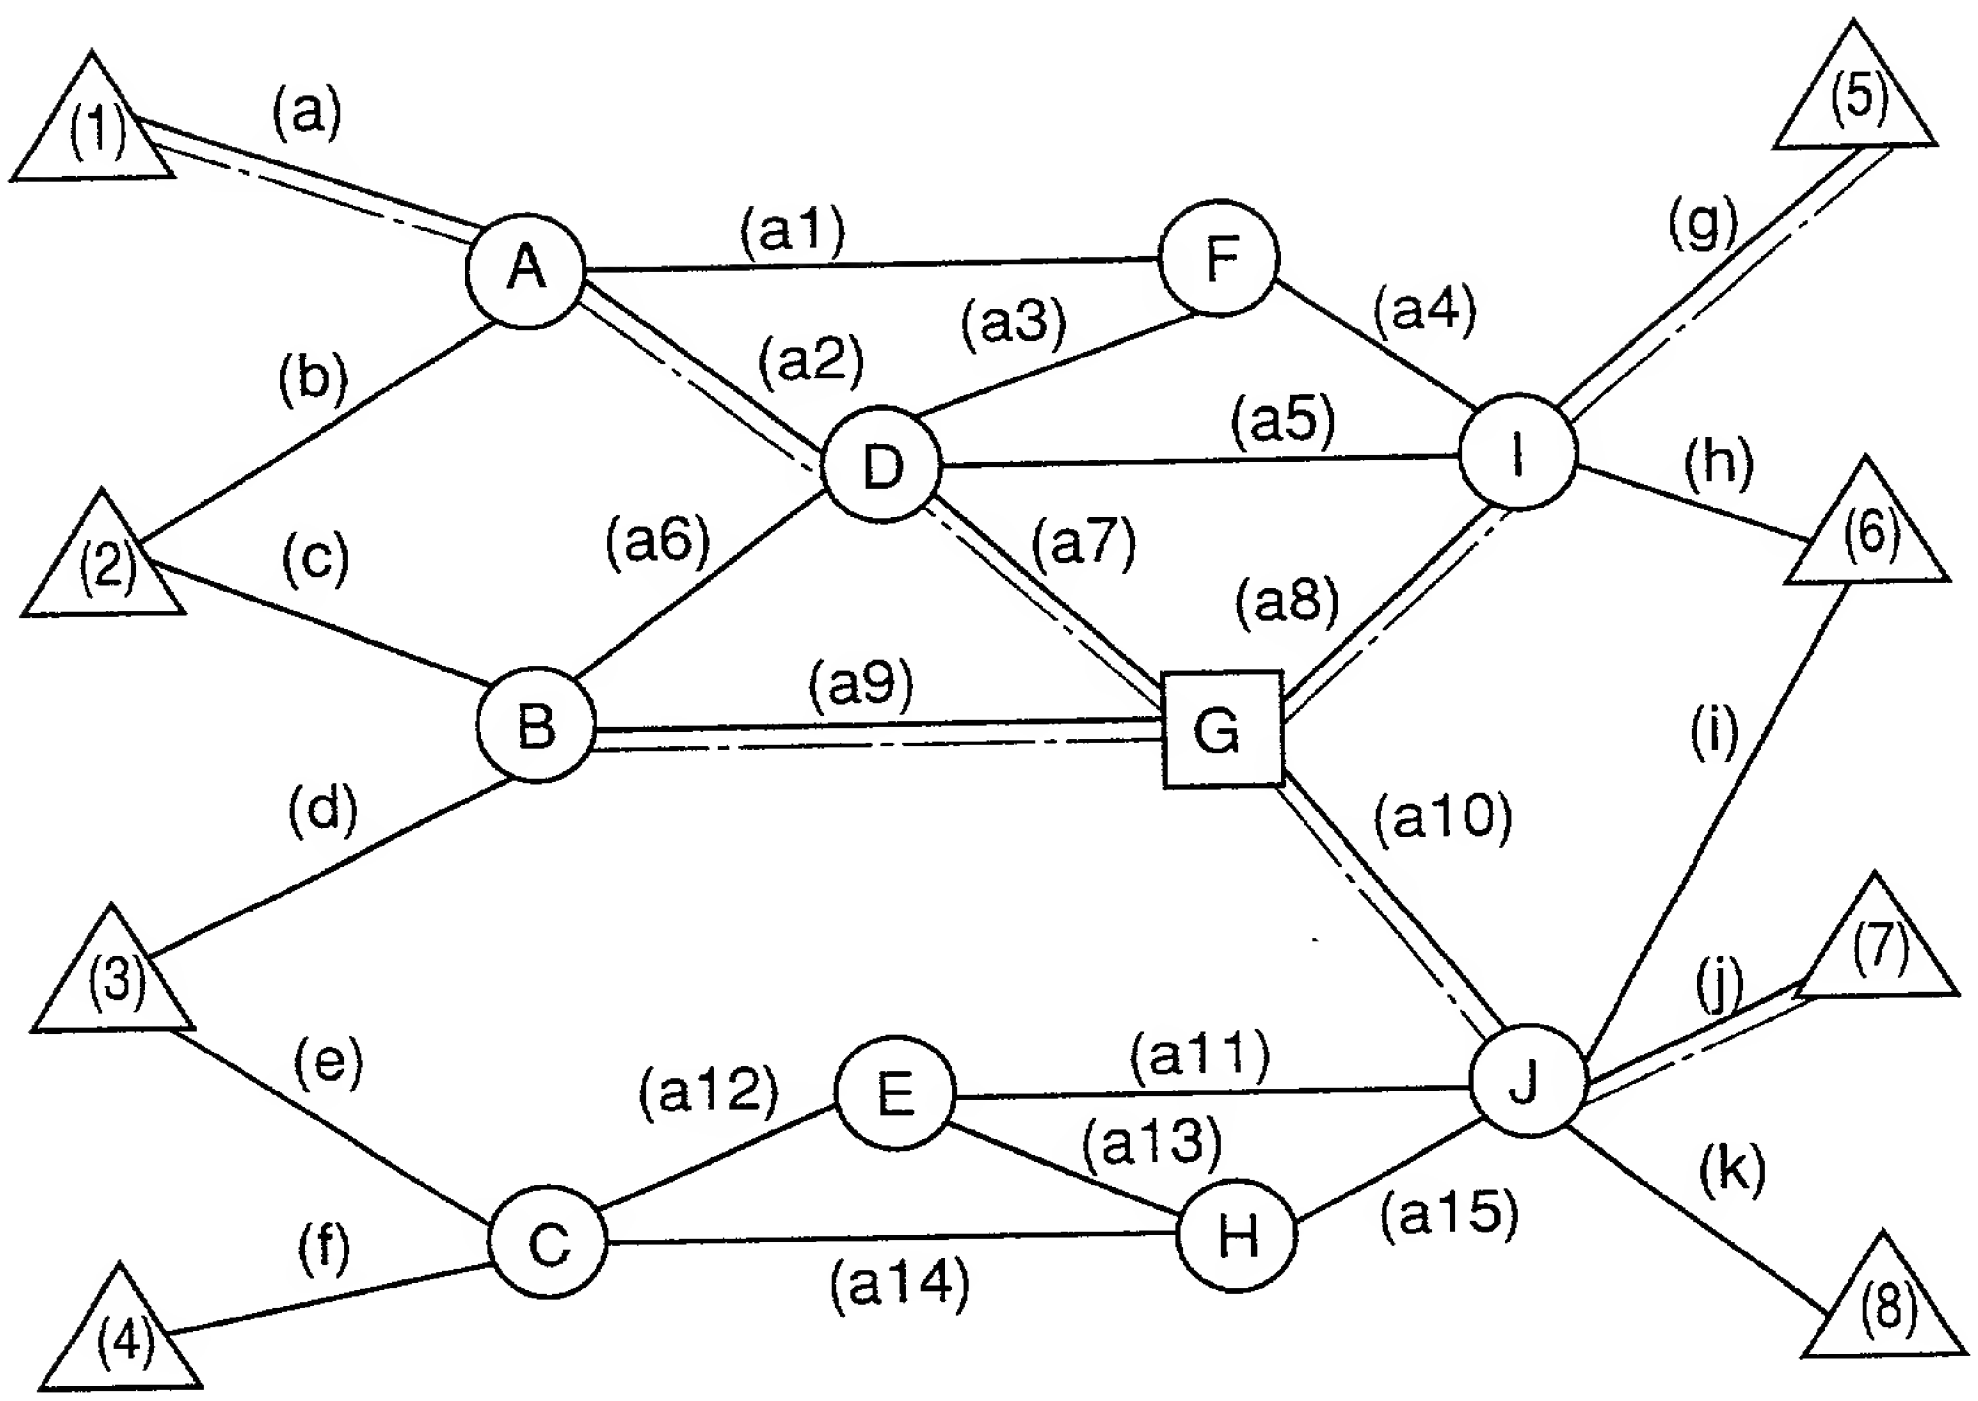
(1)
(a)
(2)
(b)
(c)
(3)
(d)
(e)
(4)
(f)
A
(a1)
F
(a2)
(a3)
(a4)
D
(a5)
I
(a6)
(a7)
(a8)
B
(a9)
G
(a10)
(5)
(g)
(h)
(6)
(i)
(7)
(j)
J
(k)
(8)
E
(a11)
(a12)
(a13)
H
C
(a14)
(a15)

PTO/SB/106 (8-96)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

____

____

METHOD AND SYSTEM FOR NETWORK

MANAGEMENT

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ __月__日に提出され、米国出願番号または特許協定条約国際出願番号を__________とし、
（該当する場合）__________ に訂正されました。

☐ was filed on ______________________
as United States Application Number or
PCT International Application Number
______________ and was amended on
______________ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第３７編第１条５６項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

PTO/SB/106 (8-96)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Japanese Language Declaration
(日本語宣言書)

私は、米国法典第３５編１１９条(a)-(d)項又は３６５条(b)項に基き下記の、米国以外の国の少なくとも一ヵ国を指定している特許協力条約３６５(a)項に基ずく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)
外国での先行出願

			Priority Not Claimed 優先権主張なし
Pat. Appln. No.11-003645	Japan	11/January/1999	☐
(Number) (番号)	(Country) (国名)	(Day/Month/Year Filed) (出願年月日)	
(Number) (番号)	(Country) (国名)	(Day/Month/Year Filed) (出願年月日)	☐

私は、第３５編米国法典１１９条(e)項に基いて下記の米国特許出願規定に記載された権利をここに主張いたします。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.) (出願番号)	(Filing Date) (出願日)	(Application No.) (出願番号)	(Filing Date) (出願日)

私は、下記の米国法典第３５編１２０条に基いて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約３６５条(c)に基ずく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第３５編１１２条第１項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第３７編１条５６項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Application No.) (出願番号)	(Filing Date) (出願日)	(Status: Patented, Pending, Abandoned) (現況：特許許可済、係属中、放棄済)
(Application No.) (出願番号)	(Filing Date) (出願日)	(Status: Patented, Pending, Abandoned) (現況：特許許可済、係属中、放棄済)

私は、私自身の知識に基ずいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じるところに基ずく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第１８編第１００１条に基ずき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

PTO/SB/106 (8-96)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Japanese Language Declaration
(日本語宣言書)

委任状：　私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。（弁護士、または代理人の氏名及び登録番号を明記のこと）

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith *(list name and registration number)*

Aaron B. KARAS, Reg. No. 18,923; Samson HELFGOTT, Reg. No. 23,072 and Leonard COOPER Reg. No.27,625

書類送付先

Send Correspondence to:

HELFGOTT & KARAS, P.C.
Empire State Building, 60th Floor
New York, New York 10118
United States of America

直接電話連絡先：（名前及び電話番号）

Direct Telephone Calls to: *(name and telephone number)*

Helfgott & Karas, P.C.
(212) 643-5000

唯一または第一発明者名	Full name of sole or first inventor	Yoshiko Doi
発明者の署名　日付	Inventor's signature / Date	Yoshiko Doi / June 25, 1999
住所	Residence	Kawasaki-shi, Kanagawa, Japan
国籍	Citizenship	Japan
私書箱	Post Office Address	c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa, 211-8588 Japan
第二共同発明者	Full name of second joint inventor, if any	Miyuki Sato
第二共同発明者　日付	Second inventor's signature / Date	Miyuki Sato / June 25, 1999
住所	Residence	Kawasaki-shi, Kanagawa, Japan
国籍	Citizenship	Japan
私書箱	Post Office Address	c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa, 211-8588 Japan

（第三以降の共同発明者についても同様に記載し、署名をすること）

(Supply similar information and signature for third and subsequent joint inventors.)

第三共同発明者		Full name of third joint inventor, if any Yujo Kakumi
第三共同発明者	日付	Third inventor's signature *Yujo Kakumi* Date June 25, 1999
住 所		Residence Nagoya-shi, Aichi, Japan
国 籍		Citizenship Japan
私書箱		Post Office Address c/o FUJITSU NAGOYA COMMUNICATION SYSTEMS LIMITED, 13-3,
		Higashisakura 1-chome, Higashi-ku, Nagoya-shi, Aichi, 461-0005 Japan
第四共同発明者		Full name of fourth joint inventor, if any Atsushi Hattori
第四共同発明者	日付	Fourth inventor's signature *Atsushi Hattori* Date June 25, 1999
住 所		Residence Nagoya-shi, Aichi, Japan
国 籍		Citizenship Japan
私書箱		Post Office Address c/o FUJITSU NAGOYA COMMUNICATION SYSTEMS LIMITED, 13-3,
		Higashisakura 1-chome, Higashi-ku, Nagoya-shi, Aichi, 461-0005 Japan

第五共同発明者		Full name of fifth joint inventor, if any Masaki Mishima
第五共同発明者	日付	Fifth inventor's signature ~~Mishima~~ *Masaki Mishima* Date June 25, 1999
住 所		Residence Nagoya-shi, Aichi, Japan
国 籍		Citizenship Japan
私書箱		Post Office Address c/o FUJITSU NAGOYA COMMUNICATION SYSTEMS LIMITED, 13-3,
		Higashisakura 1-chome, Higashi-ku, Nagoya-shi, Aichi, 461-0005 Japan
第六共同発明者		Full name of sixth joint inventor, if any
第六共同発明者	日付	Sixth inventor's signature Date
住 所		Residence
国 籍		Citizenship
私書箱		Post Office Address

（第七以降の共同発明者についても同様に記載し、署名をすること）

(Supply similar information and signature for seventh and subsequent joint inventors.)